
Seetru Limited

Seetru are Bristol-based manufacturers of safety relief and other special purpose ancillary valves for a wide range of compressed air, industrial gas, refrigerants, powder, steam, liquid and liquefied gas applications. Seetru change-over valves offer increased plant and process efficiency.





Seetru Safety Relief Valves

COMPRESSED AIR & GAS | CRYOGENIC & LIQUEFIED GAS | LIQUID | HOT WATER | STEAM | REFRIGERATION | HYGIENIC | HYDROGEN



SAFETY RELIEF VALVES



Seetru Limited



Seetru Limited was founded in 1949 with the aim of producing the finest liquid level gauges so customers could "see the true" level even under the most severe conditions. This philosophy of making the finest through innovation continued with the introduction of the Seetru range of pressure relief devices, circa 1950 the Seetru Tutchtite-sealing system revolutionized the safety valve market with valves that do not leak even after repeated popping even at high pressures.

Today, Seetru have an extensive range of Pressure Relief Valves and Liquid Level Gauges which carry a wide range of international approvals and are supplied worldwide.

Our Products

Seetru are Bristol-based manufacturers of safety relief valves and other special purpose ancillary valves for a wide range of compressed air, industrial gas, refrigerants, powder, steam, liquid and liquefied gas applications. These valves meet important international standards which include: ISO-4126-1 &-7 and ASME BPVC VIII.1 & XIII design codes as well as type test approvals from TÜV and the National Board. These products comply with the requirements of the European Pressure Equipment Directive (PED) and are available with both the CE mark as well as the UV stamp, and have wide international approvals such as the EAC (TR CU) customs union certification and declaration and the Canadian CRN. Seetru products are fully compliant with the requirements of the UK Pressure Equipment (Safety) Regulations and come with the UKCA mark.



Seetru also have a wide range of special purpose valves. The range includes Change-Over Valves (designed for switching parallel safety valves without interrupting operation), Minimum Pressure Check Valves (typically suitable for application on compressors), Air-Start Valves (designed to handle a two-stage operation for air starting of engines). We also manufacture a range of Air Receiver & In-line Check Valves.

Seetru liquid level gauges are primarily of two types, sight gauges and magnetic float by-pass gauges. Many of the gauges are direct reading though most have optional electronic remote reading systems and computer interfaces. The range includes the Quickmount, Seemag and CPI gauges for industrial and chemical applications, and the Seeflex and Seemag for marine applications. The Company's substantial design and development department, which includes TÜV approved testing facilities, enable us to provide extensive bespoke design, advisory and manufacturing services to develop or adapt individual products for new applications.



Table of contents

	1
	.

TYPE	PRODUCT / DESIGN	MATERIALS	INLET CONNECTIONS	PRESSURES	APPLICATION / INDUSTRY	PAGE
818	ATMOSPHERIC DISCHARGE	BRASS	1/4" to 1" BSP, BSPT or NPT	0.48 to 46.0 bar	COMPRESSED AIR & GAS	<u>4-6</u>
848	Atmospheric Discharge	Stainless Steel	1/4" To 1/2" BSP, BSPT or NPT	0.55 to 21.0 bar	COMPRESSED AIR & GAS	<u>7-9</u>
616	Atmospheric Discharge	Brass	1/4" to 2" BSP, BSPT or NPT	2.0 to 55.0 bar	COMPRESSED AIR & GAS	10-12
73008/74008	Atmospheric Discharge	Brass or Stainless Steel	1/4" to 1/2" BSP, BSPT or NPT	0.27 to 17.5 bar	COMPRESSED AIR & GAS	<u>13-18</u>
10625	Atmospheric Discharge	Brass or Aluminium	1" to 2" BSP, BSPT or NPT	0.50 to 12.0 bar	COMPRESSED AIR & GAS	<u>19-21</u>
31140	Atmospheric Discharge	Brass	2" BSP, BSPT or NPT and 2	2.8 to 9.4 bar	COMPRESSED AIR & GAS	22-24
31180	Atmospheric Discharge	Brass	1/2" BSPT 1/4" BSP, BSPT or NPT	20.6 to 134.5 bar	COMPRESSED AIR & GAS	25-27
31210	Atmospheric Discharge	Brass with Stainless Steel Inlet	3/8" to 3/4" BSP or BSPT	48.2 to 241.4 bar	COMPRESSED AIR & GAS	<u>28-30</u>
55004	Atmospheric Discharge	Brass with Stainless Steel Inlet	1/4" to 1/2" BSP	69 to 448.2 bar	COMPRESSED AIR & GAS	31-33
LGS &		Bronze with Brass Inlet			COMPRESSED AIR & GAS HOT WATER	
LGS HI FLOW	Enclosed Discharge	Ptfe or Elastomer Sealing	DN15 (1/2") to DN65 (2 1/2")	0.2 to 24.0 bar	LIQUIDS (WRAS APPROVED) STEAM	<u>34-37</u>
P3W (P&T)	Enclosed Discharge	Bronze with Brass Inlet	DN15 (1/2") to DN65 (2 1/2")	0.4 to 12.5 bar	LIQUIDS (WRAS APPROVED) HOT WATER	<u>38-39</u>
636/656/646	Enclosed Discharge	Bronze or Stainless Steel	3/8" to 2" BSP, BSPT or NPT	0.32 to 55.2 bar	COMPRESSED AIR & GAS HYDROGEN	40-45
63608	Enclosed Discharge	Brass with Pps Plastic Outlet Body	1/4 to 1/2" BSP, BSPT or NPT	0.3 to 13.2 bar	COMPRESSED AIR & GAS STEAM	<u>46-48</u>
86810	Enclosed Discharge	Brass With Pps Plastic Outlet Body	1/2" to 3/4" BSP, BSPT or NPT	7.0 to 16.0 bar (Not Full Range)	COMPRESSED AIR & GAS	<u>49-51</u>
					COMPRESSED AIR & GAS REFRIGERATION	
356/346	Enclosed Discharge	Bronze or Stainless Steel	3/8" to 3/4" BSP, BSPT or NPT	0.83 to 30.76 bar	CRYOGENICS & LIQUEFIED GASES	<u>52-54</u>
	Enclosed Discharge	Bronze Stainless Steel			COMPRESSED AIR & GAS STEAM	
936/946	Threaded Connections	Metal to Metal Sealing	1/2" to 2" BSP, BSPT or NPT	0.3 to 28.0 bar	CRYOGENICS & LIQUEFIED GASES HYDROGEN	<u>55-60</u>
33020/ 34020/	Enclosed Discharge	Brass or Stainless Steel	3/8" to 1/2" BSP, BSPT or NPT	55.0 to 103.4 bar	COMPRESSED AIR & GAS HYDROGEN	<u>61-63</u>
34320 33110/						
34110/ 34410	Enclosed Discharge	Brass or Stainless Steel	3/8" to 1/2" BSP, BSPT or NPT	27 to 241.3 bar	COMPRESSED AIR & GAS HYDROGEN	<u>64-66</u>
329	Enclosed Discharge	Bronze or Stainless Steel	3/8" to 3/4" BSP, BSPT or NPT	53.0 to 370.0 bar	COMPRESSED AIR & GAS REFRIGERATION CRYOGENICS & LIQUEFIED GASES HYDROGEN	67-69
B4605 / B6605 / 359	Enclosed Discharge	Stainless Steel	3/8" to 1/2" BSP, BSPT or NPT	35.0 to 500.0 bar	COMPRESSED AIR & GAS HYDROGEN	<u>70-72</u>
94605 / 946H5 / 95605 / 956H5	Enclosed Discharge	Stainless Steel	• ½" NPT, BSP & BSPT • 9/16" CONE & THREAD • 3/4" CONE & THREAD	Set Pressures from 35.0 to 1100.0 bar	HYDROGEN AIR & GAS CRYOGENICS REFRIGERATION STEAM	<u>73-75</u>
6G6	Enclosed Discharge	Stainless Steel	4 /2" + 4" TO C AND	0.004 55.04	COMPRESSED AIR & GAS STEAM	75.70
CLEAN SERVICE	Tri-Clamp Connections	Fda Compliant Elastomer Sealing	1/2" to 1" TRI-CLAMP	0.32 to 55.2 bar	HYGIENIC	<u>76-78</u>
	Enclosed Discharge		DN20 (3/4") or DN25 (1") DIN		COMPRESSED AIR & GAS STEAM	
946 FLANGED	Flanged Connections	Stainless Steel	or ANSI FLANGES	0.3 to 28.0 bar	REFRIGERATION	<u>79-81</u>
	Enclosed Discharge		DN20 (3/4") or DN25 (1") DIN			
646 FLANGED	Flanged Connections	Stainless Steel	or ANSI FLANGES	0.32 to 49.0 bar	COMPRESSED AIR & GAS	<u>82-84</u>
75008	Atmospheric Discharge	Brass	1/4" to 1/2" BSP, BSPT or NPT INLET	0.27 to 5.0 bar	STEAM	<u>85-87</u>
319-INLINE	Enclosed Discharge	Brass	3/8" to 3/4" NPT or UNF	13.5 to 50.0 bar		<u>88-90</u>
636/646 REFRIG	Atmospheric Discharge	Bronze or Stainless Steel	3/8" to 1 1/2" BSP, BSPT or NPT (UNF)	7.0 to 55.2 bar	COMPRESSED AIR & GAS REFRIGERATION	91-96
670/690/680	Enclosed Discharge	Bronze or Stainless Steel	3/8" to 2" BSP, BSPT or NPT	0.7 to 30.0 bar	LIQUIDS	97-102
970/980	Enclosed Discharge	Bronze or Stainless Steel	1/2" to 2" BSP, BSPT or NPT	0.3 to 36.0 bar	LIQUIDS	103-108
	Enclosed Discharge	Stainless Steel	DN20 (3/4") to DN25 (1") DIN			
980-FLANGED	Flanged Connections	Metal to Metal Sealing	or ANSI FLANGES	0.3 to 33.0 bar	LIQUIDS	109-111
6L0	Enclosed Discharge	Stainless Steel			LIQUIDS	
CLEAN SERVICE	Tri-Clamp Connections	Fda Compliant Elastomer Sealing	1/2" to 1" TRI-CLAMP	0.7 to 30.0 bar	HYGIENIC	112-114
	Change Over Valve	Stainless Steel		Drossini	REFRIGERATION COMPRESSED AIR & GAS	
COV10/13/30			1/2" to 2" BSP, BSPT or NPT	Pressures up to 100 bar		115-117

for compressed air or gases

Seetru Limited

Type 818 / 811

Safety valves made from Brass < Atmospheric discharge with threaded connections <

Example Applications

- Compressors
- Pressure vessels
- Pneumatic systems



Specifications

- Inlet connections: ¼" to 1" (depending on bore size)
- Temperature: -60°C to +200°C (depending on seal material)
- Pressure range: 0.48 to 50.9 bar (depending on bore size)

Approvals

- Designed in accordance with BS EN ISO-4126-1 &-7
- PED 2014/68/EU (CE)
- PE(S)R UK SI 2016 No. 1105 (UKCA)
- ASME BPVC VIII.1 & XIII (UV)
- CRN
- EAC



Materials of Construction

Component	Material	Grade
Body	Brass	CW614N
Internal Parts	Brass	CW614N
Spring	Stainless Steel	1.4310 (302)

Seal Materials


Seal Material	Temperature Range
FKM (Viton®)	-15°C to +200°C
Hydrogenated Nitrile (HNBR)	-60°C to +150°C

Easing Gear / Lifting Gear Options

- Standard option Rota-lift cap, twist type
- Spindle lift for 6mm and 8mm bore valves
- Ring-pull option available upon request

Other options:

¹Downward deflecting shroud available for valves with 8 to 15mm bore.



¹VIEW SHOWING OPTIONAL SHROUD AVAILABLE



Bore size	6 n	nm		8 mm		10 mm		13 mm		15 mm	
Inlet Size	1/4"	3/8"	1/4"	3/8"	1/2"	1/2"	3/4"	1/2"	3/4"	3/4"	1"
Flow Area	28.3	mm²	5	0.27 mm	1 ²	78.54	mm²	132.7	′ mm²	181.5	5 mm²
H - Height (Rota-lift cap)	53.5 mm		52mm-67mm depending on model		80 mm (up to 21 bar) 100 mm (21-46 bar)		95mm		119 mm		
TÜV allotted outflow coefficient 1	0.74			0.74		0.	74	0.74		0.74	
NB Rated discharge coefficient (ASME)	0.748		0.748		-		-		-		
NB Certified rated slope (ASME)		-	-		1.66 scfm/psia		2.94 scfm/psia		4.04 sc	fm/psia	
Weight (approximate) Kg	0.	07	0.15		0.35		0.40		0.	65	
Set Pressure range - PED (CE) bar	2.8-	36.0	0.55- 43.7		0.48 -	- 50.9	2.8-	40.0	2.5-	40.0	
Set Pressure range - ASME (UV) psi	40.6- 522.0		43	43.5 – 633.6 34.8 – 738		- 738	40.6 – 580.0		36.25 -	- 580.0	
Relieving pressure/fully open pressure	Set pressure +10%										
Reseating pressure						Set press	ure -10%				

¹ TÜV alloted outflow coefficients for pressures above 3.0 bar, for lower pressures please see the flow rate tables or contact Seetru.

Valves with Rota-lift Easing Gear



Standard Thread Connection Types



- BSP Parallel male thread
- BSP Taper male thread
- NPT male thread

H INLET THREAD

Valve Selection Guide



Approval Required	Valve Type	Select Bore	Inlet Size	Thread Type	Easing Gear	Seal Material
		"06" = 6mm				
PED (CE)	"818"	"88" = 8mm			Select easing	Viton®
		"10" = 10mm	Select inlet			
PED (CE),	"811"	"13" = 13mm	size from above table	Select thread type	gear (rota-lift is the standard option)	HNBR
& CRN	.5 (5 1)	"15" = 15mm				HINDK

EAC marking available upon request



Example	CE	818	06	1/4"	BSP Taper	Rota-lift	Viton	10.5 bar
Selection	Approval	Valve Type	Bore = 6mm	Inlet Size	Thread Type	Easing Gear	Seal	Set Pressure



^{*}Please send your selected details to Seetru and we can provide the full ordering code, price and lead-time.


Capacity Table - In accordance with TÜV, AIR at 0°C and 1013mbar. Normal m³/hour

Type 818: Flow rates at 10% above the set pressure



Capacity Table - In accordance with ASME BPVC.XIII, AIR at 60°F and 14.7 psia/scfm. SCFM

Type 811 (818): Flow rates at 10% above the set pressure

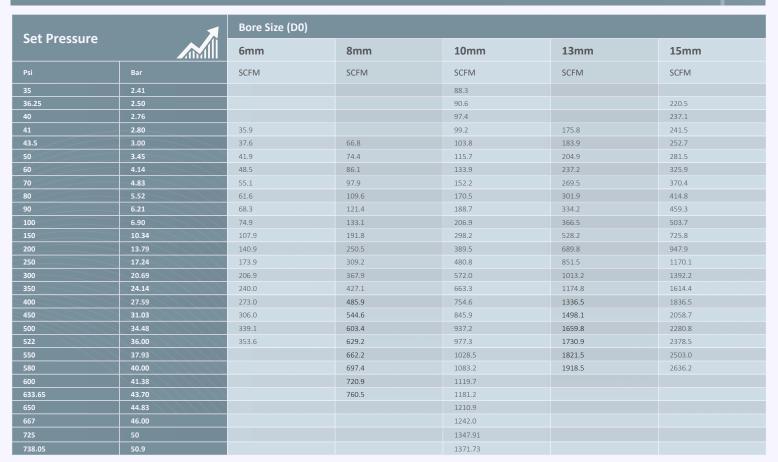



RETURN TO CONTENTS PAGE

Seetru Limited

for compressed air or gases

Type 848 / 841

Safety valves made from Stainless Steel < Atmospheric discharge with threaded connections <

Example Applications

- Compressors
- Pressure vessels
- Pneumatic systems
- Transport and railway systems



Specifications

- Inlet connections: ¼" to 1/2"
- Temperature:-60°C to +200°C (depending on seal material)
- Pressure range: 0.55 to 21.0 bar

Approvals


- Designed in accordance with BS EN ISO-4126-1 &-7
- PED 2014/68/EU (CE)
- PE(S)R UK SI 2016 No. 1105 (UKCA)
- ASME BPVC VIII.1 & XIII (UV)
- CRN
- EAC







Materials of Construction

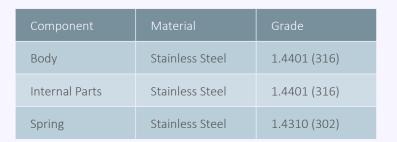

Seal Materials

Seal Material	Temperature Range
Viton® (FKM)	-15°C to +200°C
Hydrogenated Nitrile (HNBR)	-60°C to +150°C

Easing Gear / Lifting Gear Options

- Standard option Rota-lift cap, twist type
- Other option Spindle lift




Val

Valves with Rota-lift Easing Gear



Bore size		8mm			
Inlet Size	1/4"	3/8"	1/2"		
Flow Area		50.27 mm ²			
H - Height (Rota-lift cap)		nm (1/4" & 3 56mm (1/2"			
TÜV alloted outflow coefficient ¹	0.74				
NB Rated discharge coefficient (ASME)	0.748				
Weight (approximate) Kg	0.3				
Set Pressure range - PED (CE) bar	0.55- 21.0				
Set Pressure range - ASME (UV) psi		43.5- 304.5			
Relieving pressure/fully open pressure	Set Pressure +10% (0.1 bar below 1.0 bar)				
Reseating pressure		t pressure-1 par below 3.			

 $^{^1\,} T\ddot{\cup} V$ alloted outflow coefficients for pressures above 3.0 bar, for lower pressures please see the flow rate tables or contact Seetru.

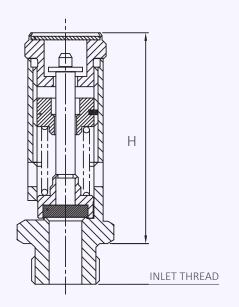

Standard Thread Connection Types




- BSP Parallel male thread
- BSP Taper male thread
- NPT male thread

Valve Selection Guide



Approval Required	Valve type	Select Bore	Inlet Size	Thread Type	Easing Gear	Seal Material
PED (CE)	848		Calaatiulataiaa		Select easing gear	Viton®
PED (CE), ASME (UV) & CRN	841	8mm	Select inlet size from above table	Select thread type	(rota-lift is the standard option)	HNBR

EAC marking available upon request





^{*}Please send your selected details to Seetru and we can provide the full ordering code, price and lead-time.

Capacity Table - In accordance with TÜV, AIR at 0°C and 1013mbar. Normal m³/hour Type 848: Flow rates at 10% above the set pressure.



Sot Droccuro		Bore Size (D0)				
Set Pressure		8mm				
Bar g	Psi g	Nm³/Hour				
0.55	7.975	30.6				
1	14.5	43.68				
2	29	71.77				
3	43.5	96.33				
4	58	133.53				
5	72.5	160.67				
6	87	187.8				
7	101.5	214.94				
8	116	242.07				
9	130.5	269.21				
10	145	296.34				
11	159.5	323.48				
12	174	350.6				
13	188.5	377.75				
14	203	404.88				
15	217.5	432.02				
20	290	567.69				
21	304.5	594.83				

Capacity Table - In accordance with ASME BPVC.XIII, AIR at 60°F and 14.7 psia/scfm. SCFM Type 841 (848): Flow rates at 10% above the set pressure.

Cat Busanus		Bore Size (D0) ————————————————————————————————————						
Set Pressure		8mm						
psi	bar	SCFM						
43.5	3.00	66.8						
50	3.45	74.4						
60	4.14	86.1						
70	4.83	97.9						
80	5.52	109.6						
90	6.21	121.4						
100	6.90	133.1						
150	10.34	191.8						
200	13.79	250.5						
250	17.24	309.2						
300	20.69	367.9						
304.5	21.00	373.2						




Seetru Limited

for compressed air or gases

Type 616 / 611

Safety valves made from Brass < Atmospheric discharge with threaded connections <

Example Applications



- Pressure vessels
- Pneumatic systems
- Transport and railway systems

Specifications

- Inlet connections: ¼" to 2" (depending on bore size)
- Temperature:-40°C to +200°C (depending on seal material)
- Pressure range: 2.0 to 55.0 bar (depending on bore size)

Materials of Construction

Component	Material	Grade	
Inlet	Brass	CW614N	
	Stainless Steel	1.4401 (316)	
Body	Brass	CW614N	
Internal parts	Brass	CW614N	
Spring	Stainless Steel	1.4310 (302)	



Approvals

- Designed in accordance with BS EN ISO-4126-1 &-7
- PED 2014/68/EU (CE)
- PE(S)R UK SI 2016 No. 1105 (UKCA)
- ASME BPVC VIII.1 & XIII (UV)
- CRN (for 18mm & 20mm bore valves only)
- EAC



Seal Materials


Seal Material	Temperature Range
Viton® (FKM)	-15°C to +200°C
Nitrile (NBR)	-40°C to +120°C

Easing Gear / Lifting Gear Options

- Standard option Rota-lift cap, twist type
- None No easing gear
- Lever lift available on request (10-20mm bores)

Other options:

¹Downward deflecting shroud available for valves with 10 to 20mm bores



¹VIEW SHOWING OPTIONAL SHROUD AVAILABLE



_

Bore Size		8mm		1	10mm (9.6mm)		13mm		18mm				20mm		
Inlet Size	1/4"	3/8"	1/2"	3/8"	1/2"	3/4"	1"	3/4"	1"	1 1/4"	1"	1 1/4"	1 1/2"	1"	1 1 1/4" 1/2" 2"
Flow Area	į	50.27mm	2		72.4m	ım²		1	.32.7mm	2		254.5mm	2		314.0mm²
H - Height (Rota-lift cap version)		81mm			109mm (up to 19 bar) 119.5mm (19-44 bar)			124.5 bar		148mm (up to 18 bar) 156mm (18-36 bar)			166mm		
TÜV allotted outflow coefficient ¹		0.7		0.71		0.81		0.81			0.76				
NB Certified rated slope (ASME)	Х		Х		X		6.04 scfm/psia		7	'.32 scfm/psia					
Weight (approximate) Kg		0.4		0.8		1.0		1.8			2.1				
Set Pressure range - PED (CE) bar		14.5- 55.0)	2.3- 44.0		2.8- 41.4		2.1- 36.0			2.0- 18.0				
Set Pressure range - ASME (UV) psi	si X		X			X		30.45- 522.0		2.0		29.0- 261.0			
Relieving pressure/fully open pressure		Set pressure +10%			10%										
Reseating pressure					Set pressure -10%										

Valves with Rota-lift Easing Gear



Standard Thread Connection Types



- BSP Parallel male thread
- BSP Taper male thread
- NPT male thread

INLET THREAD

Valve Selection Guide



Approval Required	Valve Type	Select Bore	Inlet Size	Thread Type	Easing Gear	Seal Material	
	616	82 = 8mm					
PED (CE)	(Brass inlet)	10 = 9.6mm		Select thread type		Viton® (FKM)	
FLD (CL)	626	10 = 9.6111111			Select easing gear (rota-lift is the standard option)	VILOII (I KIVI)	
	(St. Steel inlet)	13 = 13mm	Select inlet size from above table				
PED (CE),	611 (Brass inlet)	18 = 18mm				Nitrile (NBR)	
ASME (UV) & CRN	621 (St. Steel inlet)	20 = 20mm				Mitrile (NBR)	

EAC marking available upon request




Example	CE	616	13	1"	BSP Taper	Rota-lift	Viton	10.5 bar
Selection	Approval	Valve Type	Bore = 13mm	Inlet Size	Thread Type	Easing Gear	Seal	Set Pressure



^{*}Please send your selected details to Seetru and we can provide the full ordering code, price and lead-time.

Capacity Table - In accordance with TÜV, AIR at 0°C and 1013mbar. Normal m³/hour

Type 616: Flow rates at 10% above the set pressure

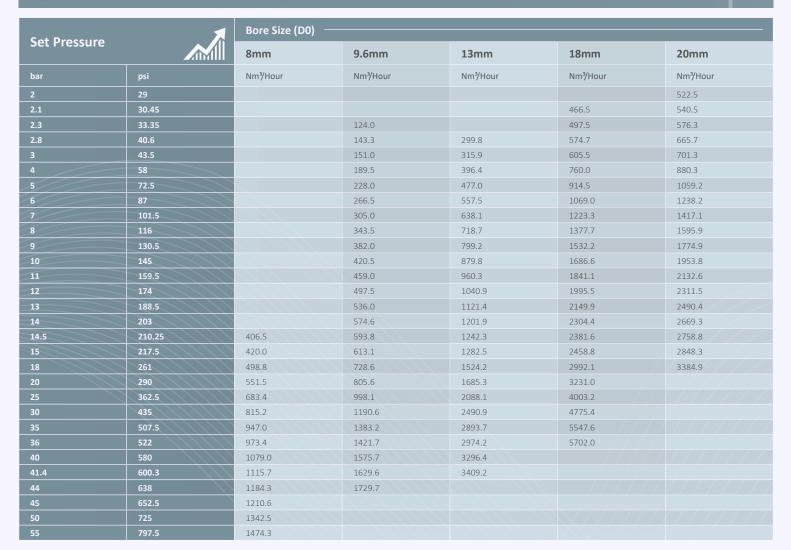

Capacity Table In accordance with ASME BPVC.XIII, AIR at 60°F and 14.7 psia/scfm. SCFM

Type 616 (611): Flow rates at 10% above the set pressure

Cat Duagauna	*	Bore Size (D0)							
Set Pressure		8mm	9.6mm	13mm	18mm	20mm			
psi	bar	SCFM	SCFM	SCFM	SCFM	SCFM			
29	2.00					341			
30.45	2.50				291	525			
35	2.41				321	389			
40	2.80				355	429			
50	3.45				421	510			
60	4.14				487	590			
70	4.83				554	671			
80	5.52				620	751			
90	6.21	Not	Not	Not	687	832			
100	6.90	ASME	ASME	ASME	753	912			
150	10.34	Approved	Approved	Approved	1085	1315			
200	13.79				1418	1717			
250	17.24				1750	2120			
300	20.69				2082				
350	24.14				2414				
400	27.59				2746				
450	31.03				3079				
500	34.48				3411				
522	36.00				3557				



RETURN TO CONTENTS PAGE

Seetru Limited

for compressed air or gases

Type 73008

Safety valves made from Brass < Atmospheric discharge with threaded connections <

Example Applications



- Compressors
- Pressure vessels
- Pneumatic systems
- Transport and railway systems

Specifications



Temperature: -40°C to +200°C (depending on seal material)

Pressure range: 0.27 to 17.5 bar



Approvals

- Designed in accordance with BS EN ISO-4126-1 &-7
- PED 2014/68/EU (CE)
- PE(S)R UK SI 2016 No. 1105 (UKCA)
- **EAC**

○ 은 남 때

Materials of Construction




Component	Material	Grade
Body	Brass	BS2874 CZ121
Internal Parts	Brass	BS2874 CZ122
Spring	Stainless Steel	BS2056 302S26

Seal Materials


Temperature Range	

Seal Material	Temperature Range
Viton® (FKM)	-15°C to +200°C
Nitrile (NBR)	-40°C to +120°C

Easing Gear / Lifting Gear Options



Other option - Spindle lift





Bore size	7.9mm					
Inlet Size	1/4" 3/8" 1/2"					
Flow Area	49mm²					
H - Height (Rota-lift cap)	46mm					
TÜV alloted outflow coefficient 1	0.63					
Weight (approximate) Kg	0.15					
Set Pressure range - PED (CE) bar	0.27 to 17.5					
Relieving pressure/fully open pressure	Set Pressure +10% (0.1 bar below 1.0 bar)					
Reseating pressure Set pressure -10% (0.3 bar below 3.0 bar						

 $^{1\,} T\ddot{\text{U}}\text{V}$ alloted outflow coefficients for pressures above 3.0 bar, for lower pressures please see the flow rate tables or contact Seetru.

INLET THREAD

Standard Thread Connection Types

- BSP Parallel male thread
- BSP Taper male thread
- NPT male thread

Valve Selection Guide



EAC marking available upon request

Example	CE	73008	8	1/4"	BSP Taper	Rota-lift	Viton	8.5 bar
Selection	Approval	Valve Type	Bore = 8mm	Inlet Size	Thread Type	Easing Gear	Seal	Set Pressure



^{*}Please send your selected details to Seetru and we can provide the full ordering code, price and lead-time.

Capacity Table - In accordance with TÜV, AIR at 0°C and 1013mbar. Normal m³/hour Type 73008: Flow rates at 10% above the set pressure



	1		Bore Size (D0)					
Set Pressure		7.9mm						
bar	psi	Nm³/Hour						
0.27	3.915	19.8						
0.5	7.25	27.5						
1	14.5	40.9						
1.5	21.75	54.2						
2	29	66.5						
3	43.5	90.7						
4	-58	113.8						
5	72.5	137.0						
6	87	160.1						
7	101.5	183.3						
8	116	206.4						
9	130.5	229.5						
10	145	252.7						
11	159.5	275.8						
12	174	298.9						
15	217.5	368.4						
17.5	253.75	426.2						



Seetru Limited

for compressed air or gases

Type 74008

Safety valves made from Stainless Steel < Atmospheric discharge with threaded connections <

Example Applications

- Compressors
- Pressure vessels
- Pneumatic systems
- Transport and railway systems



- Inlet connections: ¼" to 1/2"
- Temperature:-40°C to +200°C (depending on seal material)
- Pressure range: 0.27 to 17.5 bar



Approvals

- Designed in accordance with BS EN ISO-4126-1 &-7
- PED 2014/68/EU (CE)
- PE(S)R UK SI 2016 No. 1105 (UKCA)
- EAC

(€ 片 Ⅲ

Materials of Construction


Component	Material	Grade
Body	Stainless Steel	BS970 316S31
Internal Parts	Stainless Steel	BS970 316S31
Spring	Stainless Steel	BS2056 302S26

Seal Materials

Seal Material	Temperature Range
Viton® (FKM)	-15°C to +200°C
Nitrile (NBR)	-40°C to +120°C

Easing Gear / Lifting Gear Options

- **Standard option** Rota-lift cap, twist type
- Other option Spindle lift





Valves with Rota-lift Easing Gear

Technical information by bore size

Bore size	7.9mm				
Inlet Size	1/4" 3/8" 1/2"				
Flow Area	49mm²				
H - Height (Rota-lift cap)	46mm				
TÜV alloted outflow coefficient 1	0.63				
Weight (approximate) Kg	0.15				
Set Pressure range - PED (CE) bar	0.27 to 17.5				
Relieving pressure/fully open pressure	Set Pressure +10% (0.1 bar below 1.0 bar)				
Reseating pressure	Set pressure -10%				

 $1\,{
m T\ddot{U}V}$ alloted outflow coefficients for pressures above 3.0 bar, for lower pressures please see the flow rate tables or contact Seetru.

INLET THREAD

Standard Thread Connection Types



- BSP Taper male thread
- NPT male thread


Reseating pressure

Valve Selection Guide



(0.3 bar below 3.0 bar)

EAC marking available upon request





^{*}Please send your selected details to Seetru and we can provide the full ordering code, price and lead-time.

Capacity Table - In accordance with TÜV, AIR at 0°C and 1013mbar. Normal m³/hour Type 74008: Flow rates at 10% above the set pressure



C-4 D	Sat Draccura		Bore Size (D0)						
Set Pressure		7.9mm							
bar	psi	Nm³/Hour							
0.27	3.915	19.8							
0.5	7.25	27.5							
1	14.5	40.9							
1.5	21.75	54.2							
2	29	66.5							
3	43.5	90.7							
4	58	113.8							
5	72.5	137.0							
6	87	160.1							
7	101.5	183.3							
8	116	206.4							
9	130.5	229.5							
10	145	252.7							
11	159.5	275.8							
12	174	298.9							
15	217.5	368.4							
17.5	253.75	426.2							



Seetru Limited

for compressed air or gases

Type 106 / 116

Safety valves made from Brass or Aluminum <

Atmospheric discharge with threaded connections – FKS approved <

Example Applications




- Pressure vessels
- Pneumatic systems
- Particle laden air/gas (FKS)
- Transport vehicles

Specifications

- Inlet connections: 1" to 2"
- Temperature: -40°C to +200°C (depending on seal material)
- Pressure range: 0.5 to 12.0 bar

Materials of Construction

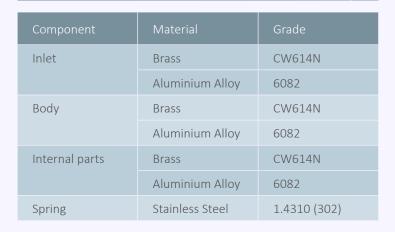



Approvals

- FKS approval for particle laden gases
- Designed in accordance with BS EN ISO-4126-1 &-7
- PED 2014/68/EU (CE)
- PE(S)R UK SI 2016 No. 1105 (UKCA)
- ASME BPVC VIII.1 & XIII (UV)
- CRN
- **EAC**







Seal Materials


Seal Material	Temperature Range
Viton® (FKM)	-15°C to +200°C
Nitrile (NBR)	-40°C to +120°C

Easing Gear / Lifting Gear Options



Other options:

¹Downward deflecting shroud available




¹VIEW SHOWING OPTIONAL SHROUD AVAILABLE




RETURN TO CONTENTS PAGE

$K \vdash$



Bore Size	25mm					
Inlet Size	1" 1 1/4" 1 1/2" 2"					
Flow Area 491mm ²						
H - Height (Rota-lift cap version)		172	mm			
TÜV allotted outflow coefficient ¹	0.78 (Above 3.6 bar)					
NB Certified rated slope (ASME)	11.3 scfm/psia					
Weight (approximate) Kg	2	2.8 (for bi	rass valve)		
Set Pressure range - PED (CE) bar	0.5-12.0 bar					
Set Pressure range - ASME (UV) psi 7.25-174.0 bar						
Relieving pressure/fully open pressure Set pressure +10%						
Reseating pressure	seating pressure Set pressure-10%					

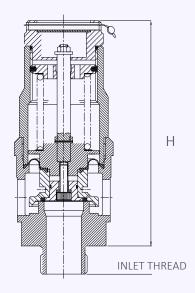

Standard Thread Connection Types



- BSP Parallel male thread
- BSP Taper male thread
- NPT male thread

Valve Selection Guide



Approval Required	Valve type	Bore Size	Inlet Size	Thread Type	Easing Gear	Downward Deflecting Shroud Required?	Seal Material
PED (CE)	106 (Brass valve)						\/;+an@/F/\\\
PED (CE)	116 (Aluminium valve)		Select inlet size		Select easing gear		Viton [®] (FKM)
PED (CE), ASME	101 (Brass valve)	25=25mm	from above table	Select thread type	(rota-lift is the standard option)	Yes or No	Nitrila (NDD)
(UV) & CRN	111 (Aluminium valve)						Nitrile (NBR)

EAC marking available upon request



Example	CE	106	25	1"	BSP Taper		Shroud?		3.1 bar
Selection	Approval	Valve Type	Bore = 25mm	Inlet Size	Thread Type	Easing Gear	No	Seal	Set Pressure



^{*}Please send your selected details to Seetru and we can provide the full ordering code, price and lead-time.

Capacity Table - In accordance with TÜV, AIR at 0°C and 1013mbar. Normal m³/hour Type 106/116: Flow rates at 10% above the set pressure



Set Pressure		Bore Size (D0)					
		25mm					
bar	Psi g	Nm³/Hour					
0.5	7.25	308					
1	14.5	466					
2	29	795					
3	43.5	1110					
4	58	1411					
5	72.5	1698					
6	87	1985					
7	101.5	2272					
8	116	2559					
9	130.5	2846					
10	145	3133					
11	159.5	3420					
12	174	3707					

Capacity Table - In accordance with ASME BPVC.XIII, AIR at 60°F and 14.7 psia/scfm. SCFM Type 106/116: Flow rates at 10% above the set pressure.

6.1.		Bore Size (D0)				
Set Pressure		25mm				
psi	bar	SCFM				
7.25	0.50	282				
10	2.50	313				
20	1.38	426				
30	2.80	539				
40	2.76	663				
50	3.45	786				
60	4.14	912				
70	4.83	1036				
80	5.52	1161				
90	6.21	1285				
100	6.90	1409				
150	10.34	2031				
174	12.00	2329				



Seetru Limited

for compressed air or gases

Type 31140

Safety valves made from Brass < Atmospheric discharge with threaded connections <

Example Applications



- Compressors including PET compressors
- Pressure vessels
- Pneumatic systems

Specifications

- Inlet connections: 2" (or 2 ½" using adapter)
- Temperature:-40°C to +200°C (depending on seal material)
- Pressure range: 2.8 to 9.4 bar
 (2.8 to 3.8, 4.3 to 4.5, 5.5 & 7.7 to 9.4 bar)





Component	Material	Grade
Inlet	Brass	BS2874 CZ121
Body	Brass	BS2874 CZ121
Internal parts	Brass	BS2874 CZ121
Spring	Carbon Steel	BS5216



Approvals

- Designed in accordance with BS EN ISO-4126-1 &-7
- PED 2014/68/EU (CE)
- PE(S)R UK SI 2016 No. 1105 (UKCA)
- EAC

(€ K ⊞

Seal Materials

Seal Material	Temperature Range
Viton® (FKM)	-15°C to +200°C
Nitrile (NBR)	-40°C to +120°C


Easing Gear / Lifting Gear Options

Standard option: knob-lift



Valves with Rota-lift Easing Gear

Bore size	37.5mm				
Inlet Size	2" 2 1/2"				
Flow Area	1104.5mm²				
H - Height	230mm				
TÜV alloted outflow coefficient	0.74				
Weight (approximate) Kg	4.0 kg				
Set Pressure range - PED (CE) bar	2.8 to 9.4 bar				
Relieving pressure/fully open pressure	Set pressure +10%				

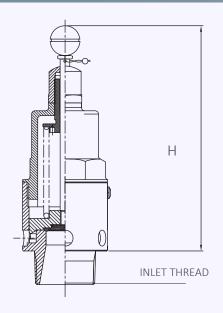

Standard Thread Connection Types



- BSP Parallel male thread
- BSP Taper male thread
- NPT male thread

Reseating pressure

Valve Selection Guide



Approval Required	Valve type	Inlet Size	Thread Type	Easing Gear	Seal Material
DED (CE)	Select inlet size from above table Select threa	Calact through tune	Knob lift only	Viton® (FKM)	
PED (CE)		from above table	Select thread type	Knob-lift only	Nitrile (NBR)

Set pressure-10%

EAC marking available upon request



Example	CE	31140	2"	BSP Taper	Rota-lift	Viton	3.5 bar
Selection	Approval	Valve Type	Inlet Size	Thread Type	Knob-Lift	Seal	Set Pressure



^{*}Please send your selected details to Seetru and we can provide the full ordering code, price and lead-time.

Capacity Table - In accordance with TÜV, AIR at 0°C and 1013mbar. Normal m³/hour Type 31140: Flow rates at 10% above the set pressure



			Bore Size (D0)				
Set Pressure							
		37.5mm					
bar	psi	Nm³/Hour					
2.8	40.6	2278					
3.8	55.1	2891					
4.3	62.35	3197					
4.5	65.25	3319					
5.5	79.75	3932					
7.7	111.65	5279					
8	116	5463					
9	130.5	6075					
9.4	136.3	6320					



Seetru Limited

for compressed air or gases

Type 31180

Safety valves made from Brass < Atmospheric discharge with threaded connections <

Example Applications



- Compressors
- Pressure vessels
- Pneumatic systems
- High pressure systems

Specifications

- Inlet connections: ¼" or 3/8"
- Temperature:-40°C to +200°C (depending on seal material)
- Pressure range: 20.6 to 134.5 bar




Approvals



- PED 2014/68/EU (CE)
- PE(S)R UK SI 2016 No. 1105 (UKCA)
- EAC

C€ EN EN

Materials of Construction

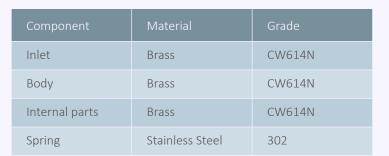

Seal Materials


Seal Material	Temperature Range
Viton® (FKM)	-15°C to +200°C
Nitrile (NBR)	-40°C to +120°C

Easing Gear / Lifting Gear Options

Standard option – Spindle Lift



Bore size	3.2mm				
Inlet Size	1/4" 3/8"				
Flow Area	8.0mm²				
H - Height	42mm				
TÜV alloted outflow coefficient	0.54				
Weight (approximate) Kg	0.4				
Set Pressure range - PED (CE) bar	20.6 to 134.5 bar				
Relieving pressure/fully open pressure	Set pressure +10%				
Reseating pressure	Set press	sure-15%			

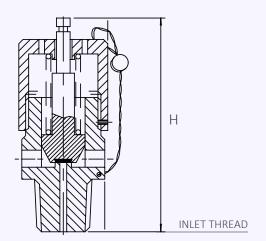

Standard Thread Connection Types

- BSP Parallel male thread (1/4" or 3/8")
- BSP Taper male thread (1/4")
- NPT male thread (1/4")

Valve Selection Guide



Approval Required	Valve type	Inlet Size	Thread Type	Easing Gear	Seal Material
PED (CE)	31180	Select inlet size from above table	Select thread type	Caindle lift only	Viton® (FKM)
				Spindle lift only	Nitrile (NBR)

EAC marking available upon request



Example Selection	CE	31180	1/4"	BSP Taper	Spindle Lift	Viton	100 bar
	Approval	Valve Type	Inlet Size	Thread Type	Easing Gear	Seal	Set Pressure



^{*}Please send your selected details to Seetru and we can provide the full ordering code, price and lead-time.

Capacity Table - In accordance with TÜV, AIR at 0°C and 1013mbar. Normal m³/hour Type 31180: Flow rates at 10% above the set pressure



		Bore Size (D0)		
Set Pressure	Set Pressure			
bar	psi	Nm³/Hour		
20.6	298.7	70.0		
30.0	435.0	100.6		
40.0	580.0	133.2		
50.0	725.0	165.7		
60.0	870.0	198.2		
70.0	1015.0	230.8		
80.0	1160.0	263.3		
100.0	1450.0	328.4		
110.0	1595.0	360.9		
120.0	1740.0	393.5		
130.0	1885.0	426.0		
134.5	1950.3	440.7		



Seetru Limited

for compressed air or gases

Type 31210

Safety valves made from Brass < Atmospheric discharge with threaded connections <

Example Applications




- Compressors
- Pressure vessels
- Pneumatic systems
- High pressure systems

Specifications



- Inlet connections: 3/8" to 3/4"
- Temperature:-40°C to +200°C (depending on seal material)
- Pressure range: 20.6 to 134.5 bar



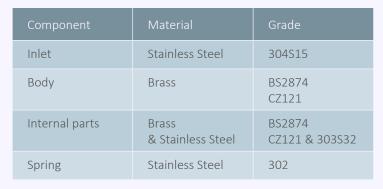



Approvals

- Designed in accordance with BS EN ISO-4126-1 &-7
- PED 2014/68/EU (CE)
- PE(S)R UK SI 2016 No. 1105 (UKCA)
- EAC

(€ K Ⅲ

Seal Materials

Seal Material	Temperature Range
Viton® (FKM)	-15°C to +200°C
Nitrile (NBR)	-40°C to +120°C

Easing Gear / Lifting Gear Options

Standard option – No easing gear. Fitted with downward deflecting shroud

Optional – Lever lift easing gear












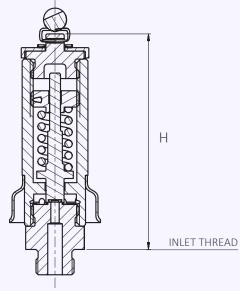

Standard Thread Connection Types



- BSP Parallel male thread (3/8",1/2" or 3/4")
- BSP Taper male thread (3/8" or 1/2")
- NPT male thread (1/2")

Valve Selection Guide



Approval Required	Valve type	Inlet Size	Thread Type	Easing Gear	Seal Material
DED (CE)	DED (CE) 24240	Select inlet size	Calact through tune	None	Viton® (FKM)
PED (CE) 31210	31210	from above table	Select thread type	None	Nitrile (NBR)

EAC marking available upon request



Example Selection	CE	31210	1/2"	BSP parallel	None	Viton	100 bar
	Approval	Valve Type	Inlet Size	Thread Type	Easing Gear	Seal	Set Pressure



^{*}Please send your selected details to Seetru and we can provide the full ordering code, price and lead-time.

Capacity Table - In accordance with TÜV, AIR at 0°C and 1013mbar. Normal m³/hour Type 31210: Flow rates at 10% above the set pressure



	1	Bore Size (D0)		
Set Pressure		3.65mm		
bar	psi	Nm³/Hour		
48.2	698.9	261.8		
50.0	725.0	271.5		
60.0	870.0	324.8		
70.0	1015.0	378.1		
80.0	1160.0	431.4		
90.0	1305.0	484.7		
100.0	1450.0	538.0		
150.0	2175.0	804.6		
200.0	2900.0	1071.1		
240.0	3480.0	1284.1		
241.4	3500.3	1292.1		



Seetru Limited

for compressed air or gases

Type 55004

Safety valves made from Brass < Atmospheric discharge with threaded connections <

Example Applications



- Pressure vessels
- Pneumatic systems
- High pressure systems

Specifications


• Inlet connections: 1/4" to 1/2"

• Temperature: 0°C to 100°C

Pressure range: • 69.0 to 448.2 bar (3/8" and 1/2")

69.0 to 345.0 bar (1/4")

Materials of Construction

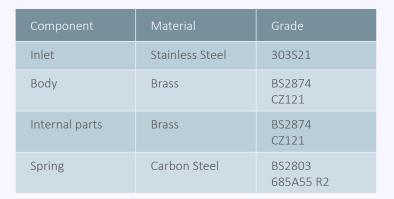



Approvals

- Designed in accordance with BS EN ISO-4126-1 &-7
- PED 2014/68/EU (CE)
- PE(S)R UK SI 2016 No. 1105 (UKCA)
- EAC

C€ FR FII

Seal Materials

Seal Material	Temperature Range
Viton® (FKM)	0°C to 100°C
Nitrile (NBR)	0°C to 100°C

Easing Gear / Lifting Gear Options

Standard option – No easing gear.



Bore size

Inlet Size

Flow Area

H - Height

TÜV alloted outflow coeff

Weight (approximate) Kg

Reseating pressure

Set Pressure range - PED (CE) bar

Relieving pressure/fully open pressure

Valves with Rota-lift Easing Gear

illiation by bore size						
		3.73mm				
	1/4"	3/8"	1/2"			
		10.95mm²				
	90mm					
icient		0.082				


0.5

69 to 448.2 bar

(Max. 345 bar for 1/4")

Set pressure +10%

Set pressure-15%

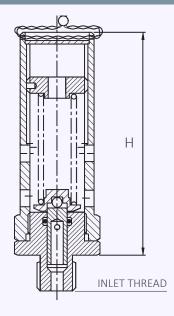

Standard Thread Connection Types

BSP Parallel male thread

Valve Selection Guide

Approval Required	Valve type	Inlet Size	Thread Type	Easing Gear	Seal Material
PED (CE) 55004	Select inlet size		N.	Viton® (FKM)	
	55004	from above table	Select thread type	None	Nitrile (NBR)

EAC marking available upon request

Example	CE	55004	1/2"	BSP parallel	None	Viton	100 bar
Selection	Approval	Valve Type	Inlet Size	Thread Type	Easing Gear	Seal	Set Pressure



^{*}Please send your selected details to Seetru and we can provide the full ordering code, price and lead-time.

Capacity Table - In accordance with TÜV, AIR at 0°C and 1013mbar. Normal m³/hour Type 55004: Flow rates at 10% above the set pressure



		D 6: (D0)	_	 	
Set Pressure		Bore Size (D0)			
		3.73			
bar	psi	Nm³/Hour			
69.0	1000.5	46.9			
100.0	1450.0	67.8			
150.0	2175.0	101.3			
200.0	2900.0	134.9			
250.0	3625.0	168.5			
300.0	4350.0	202.0			
350.0	5075.0	235.6			
400.0	5800.0	269.2			
448.0	6496.0	301.4			



hot water

compressed air & gas



Safety valves made from Brass < Enclosed discharge with threaded connections <

Example Applications

- Hot water, including boilers (vented and unvented)
- Steam boilers and steam plants
- Pump and thermal relief
- Bypass relief
- Process liquids and gases
- Pressure vessels and lines

- Heating and cooling systems
- Heat exchangers and industrial cooling systems
- Refrigeration systems
- Pressure booster systems
- Solar power systems
- District heating systems



Specifications

- Size range: DN15 to DN65 (1/2" to 2 1/2" BSP female connections)
- Temperature: -60°C to +200°C (with PTFE seals (EPDM-45°C to +140°C)
- Pressure range: 0.2 to 24 bar (depending on seal and duty)

Materials of Construction

	COMPONENT	MATERIAL
1	Seat	Dezincification Resistant Material
2	Lift Aid Assembly	Dezincification Resistant Material
3	Body	Bronze CC491K / C83600
4	Piston	Dezincification Resistant Material
5	Spring	Steel 1.4401
6	Adjuster	Brass
7	Сар	Brass
8	Cover	Brass
9	Lever	Brass
10	Wire Lock	Steel & Lead
11	O-Ring	EPDM
12	Locking Slug	Nylon
13	Spindle	Stainless Steel
14	Seal	PTFE or EPDM

Dimensions

Size (Inlet x Outlet)	Dim A mm (inches)	Dim B mm (inches)	Height (L) mm (inches)	Height (C) mm (inches)
DN15 (½")	33.0 (1.29)	26.0 (1.02)	124.0 (4.88)	114.5 (4.51)
DN20 (¾")	37.0 (1.46)	32.0 (1.26)	130.0 (5.12)	120.5 (4.74)
DN25 (1")	42.0 (1.65)	37.0 (1.46)	156.0 (6.14)	146.5 (5.77)
DN32 (1 ¼")	50.0 (1.97)	42.0 (1.65)	174.0 (6.85)	164.5 (6.48)
DN40 (1 ½")	59.0 (2.32)	50.0 (1.97)	222.5 (8.76))	211.5 (8.33)
DN50 (2")	69.0 (2.72)	59.0 (2.32)	256.5 (9.70)	246.5 (9.70)
DN65 (2 ½")	78.0 (3.07)	83.5 (3.28)	320 (12.60)	310 (12.20)

Approvals


- Designed in accordance with BS EN ISO-4126-1 &-7
- PED 2014/68/EU (CE)
- PE(S)R UK SI 2016 No. 1105 (UKCA)
- EAC
- WRAS
- KUKReg 4







Valve Drawing

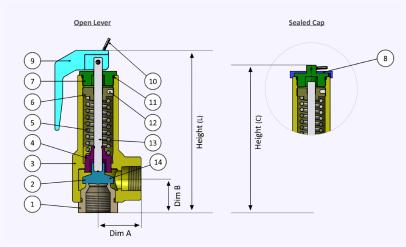

Easing Gear / Lifting Gear Options

Options:





Sealed lever (gas tight)

Sealed Cap (gas tight cap)





Discharge Capacities



Discharge capacity for WATER at 10% over-pressure ^{1,2} Kdr = 0.26											r = 0.26		
	DN In					25mm (1")		32mm (1¼")		40mm (1½")		50mm (2")	
Valve size	DN Out	15mr	n (½")	20mn	n (¾")	25mr	n (1")	32mm	(1¼")	40mm	n (1½")	50mr	m (2")
	d _o (mm)	13.5		15		20		25		32		40	
Set pressure (bar)	Set pressure (psi)	kg/hr	GPM (US)	kg/hr	GPM (US)	kg/hr	GPM (US)	kg/hr	GPM (US)	kg/hr	GPM (US)	kg/hr	GPM (US)
0.2	2.9	849.7	3.7	1097.2	4.8	1950.6	8.6	3047.8	13.4	4993.4	22.0	7802.3	34.4
1.0	14.5	1899.9	8.4	2453.4	10.8	4361.6	19.2	6815.0	30.0	11165.7	49.2	17446.4	76.9
2.0	29.0	2686.9	11.8	3469.6	15.3	6168.2	27.2	9637.9	42.5	15790.7	69.6	24672.9	108.8
4.0	58.0	3799.8	16.8	4906.8	21.6	8723.2	38.5	13630.0	60.1	22331.4	98.5	34892.8	153.8
6.0	87.0	4653.8	20.5	6009.6	26.5	10683.7	47.1	16693.3	73.6	27350.2	120.6	42734.7	188.4
8.0	116.0	5373.8	23.7	6939.3	30.6	12336.5	54.4	19275.7	85.0	31581.3	139.2	49345.8	217.6
10.0	145.0	6008.0	26.5	7758.3	34.2	13792.6	60.8	21550.9	95.0	35309.0	155.7	55170.3	243.3
12.0	174.0	6581.5	29.0	8498.8	37.5	15109.0	66.6	23607.8	104.1	38679.1	170.5	60436.0	266.5
15.0	217.5	7358.3	32.4	9502.0	41.9	16892.4	74.5	26394.4	116.4	43244.5	190.7	67569.6	297.9
20.0	290.0	8496.7	37.5	10971.9	48.4	19505.7	86.0	30477.6	134.4	49934.5	220.2	78022.6	344.0
24.0	348.0	9307.6	41.0	12019.1	53.0	21367.4	94.2	33386.5	147.2	54700.5	241.2	85469.5	376.9

¹ Metric units are calculated to BS EN ISO4126-7:2013 and displayed in their customary units ² Imperial units are calculated to ASME Section VIII Division 1 and displayed in their customary units

Discharge c	apacity for <u>H</u> (<u>OT WATER</u>	at 10% ov	ver-pressu	re (Unven	ted Syster	ns)¹					Ko	dr = 0.38
	DN In	15mm (½") 15mm (½")				25mm (1") 25mm (1")		32mm (1¼") 32mm (1¼")		40mm (1½") 40mm (1½")		50mm (2") 50mm (2")	
	DN Out												
	d _o (mm)	13	3.5				20	2			32	4	10
Set pressure (bar)	Set pressure (psi)	kW	BTU/sec	kW	BTU/sec	kW	BTU/sec	kW	BTU/sec	kW	BTU/sec	kW	BTU/sec
0.2	2.9	21.1	20.0	27.2	25.8	48.4	45.9	75.7	71.7	124.0	117.5	193.7	183.6
1.0	14.5	36.2	34.3	46.7	44.2	83.0	78.7	129.7	122.9	212.5	201.4	332.0	314.6
2.0	29.0	55.0	52.1	71.0	67.3	126.2	119.6	197.2	186.9	323.1	306.2	504.8	478.4
4.0	58.0	92.6	87.8	119.6	113.3	212.6	201.5	332.2	314.9	544.3	515.9	850.4	806.0
6.0	87.0	130.2	123.5	168.2	159.4	299.0	283.4	467.2	442.8	765.5	725.5	1196.0	1133.6
8.0	116.0	167.9	159.1	216.8	205.5	385.4	365.3	602.2	570.8	986.7	935.2	1541.7	1461.2
	145.0	205.5	194.8	265.4	251.6	471.8	447.2	737.2	698.8	1207.9	1144.8	1887.3	1788.8
12.0	174.0	243.2	230.5	314.0	297.6	558.2	529.1	872.2	826.7	1429.1	1354.5	2232.9	2116.4
15.0	217.5	299.6	284.0	386.9	366.7	687.8	652.0	1074.8	1018.7	1760.9	1669.0	2751.4	2607.8
20.0	290.0	393.7	373.2	508.4	481.9	903.9	856.7	1412.3	1338.6	2313.9	2193.1	3615.5	3426.8
24.0	348.0	469.0	444.5	605.6	574.0	1076.7	1020.5	1682.3	1594.5	2756.3	2612.5	4306.7	4082.0

¹ Calculations based on Hot Water at or above 100°C, using the Kdr of Gas ² Calculations are in accordance to BS EN ISO 4126-1:2004 National Annex NA

Discharge capacity for AIR at 10% ov			20mm (¾") 25mm (1") 32mm (1¼")							Kdr = 40mm (1½") 50mm (2"			
	DN In												
	DN Out	15mm (½")		20mm (¾")		25mm (1")		32mm (1¼")		40mm (1½")		50mm (2")	
	d _o (mm)	13	3.5	1		2	20	2			32	4	0
Set pressure (bar)	Set pressure (psi)	I/sec	SCFM		SCFM	I/sec	SCFM		SCFM	I/sec	SCFM	I/sec	SCFM
0.2	2.9	12.5	26.5	16.1	34.2	28.6	60.7	44.7	94.9	73.2	155.5	114.4	243.0
1.0	14.5	21.4	45.3	27.6	58.6	49.0	104.1	76.6	162.7	125.5	266.5	196.1	416.4
2.0	29.0	32.5	69.0	41.9	89.0	74.5	158.3	116.5	247.3	190.8	405.2	298.2	633.2
4.0	58.0	54.7	116.2	70.6	150.0	125.6	266.7	196.2	416.7	321.5	682.7	502.3	1066.7
6.0	87.0	76.9	163.4	99.3	211.0	176.6	375.1	276.0	586.0	452.1	960.1	706.5	1500.2
8.0	116.0	99.2	210.6	128.1	271.9	227.7	483.4	355.7	755.4	582.8	1237.6	910.6	1933.7
10.0	145.0	121.4	257.8	156.8	332.9	278.7	591.8	435.5	924.7	713.5	1515.0	1114.8	2367.3
12.0	174.0	143.6	305.0	185.5	393.9	329.7	700.2	515.2	1094.1	844.1	1792.5	1318.9	2800.8
15.0	217.5	177.0	375.8	228.5	485.3	406.3	862.8	634.8	1348.1	1040.1	2208.7	1625.2	3451.1
20.0	290.0	290.0	493.8	300.3	637.7	533.9	1133.7	834.2	1771.4	1366.8	2902.3	2135.6	4534.9
24.0	348.0	277.0	588 3	357 7	759 6	636.0	1350 5	993 7	2110 1	1628 1	3457.2	2543 9	5401 9

Metric units are calculated to BS EN ISO4126-7:2013 and converted to I/sec at 1.013 bar a. @ 15°C
 Imperial units are calculated to ASME Section VIII Division 1 and displayed in their customary units
 To convert from I/sec (1.013 bar a. @ 15°C) to Nm3/hr (1.013 bar a. @ 0°C) multiply by 3.413

	DN In	15mn	n (½")	20mm (¾")		25mm (1")		32mm	32mm (1¼")		ı (1½")	50mm (2")	
Valve size	DN Out	15mm (½")		20mm (¾")		25mm (1")		32mm (1½")		40mm (1½")		50mm (2")	
			3.5								2		mm)
Set pressure (bar)	Set pressure (psi)	kg/hr	lb/hr	kg/hr	lb/hr	kg/hr	lb/hr	kg/hr	lb/hr	kg/hr	lb/hr	kg/hr	lb/hr
0.2	2.9	29.1	74.2	37.6	95.8	66.9	170.4	104.5	266.2	171.3	436.2	267.6	681.6
1.0	14.5	59.7	127.2	77.1	164.2	137.0	292.0	214.1	456.2	350.8	747.5	548.1	1167.9
2.0	29.0	89.7	193.4	115.8	249.7	205.9	444.0	321.7	693.7	527.1	1136.6	823.6	1775.9
4.0	58.0	148.8	325.8	192.1	420.7	341.5	748.0	533.7	1168.7	874.4	1914.8	1366.2	2991.9
6.0	87.0	207.3	458.2	267.6	591.7	475.8	1052.0	743.4	1643.7	1218.0	2693.0	1903.1	4207.9
8.0	116.0	265.4	590.7	342.7	762.7	609.2	1356.0	951.9	2118.7	1559.5	3471.3	2436.8	5423.8
10.0	145.0	323.3	723.1	417.5	933.7	742.3	1660.0	1159.8	2593.7	1900.3	4249.5	2969.2	6639.8
12.0	174.0	381.1	855.5	492.1	1104.7	874.8	1963.9	1366.9	3068.7	2239.5	5027.7	3499.2	7855.8
14.0	203.0	438.9	987.9	566.7	1275.7	1007.5	2267.9	1574.2	3543.7	2579.2	5805.9	4030.0	9071.8

¹ Metric units are calculated to BS EN ISO4126-7:2013 and displayed in their customary units ² Imperial units are calculated to ASME Section VIII Division 1 and displayed in their customary units ³ Calculations for saturated steam only ⁴ PTFE seals up to 14 bar, EPDM seals up to 2.5 bar - contact Seetru for details on maximum steam pressure for other seal materials



hot water

compressed air & gas

LGS®HI-FLOW

Safety valves made from Brass < Enclosed discharge with threaded connections <

Example Applications

- Hot water, including boilers (vented and unvented)
- Steam boilers and steam plants
- Pump and thermal relief
- Bypass relief
- Process liquids and gases
- Pressure vessels and lines

- Heating and cooling systems
- Heat exchangers and industrial cooling systems
- Refrigeration systems
- Pressure booster systems
- Solar power systems
- District heating systems



Specifications

- Size range: DN15 to DN50 (1/2" BSP to 2" BSP)
- Temperature: -60°C to +200°C (with PTFE seals (EPDM-45°C to +140°C)
- Pressure range: 0.2 to 24 bar (depending on seal and duty)

Materials of Construction

	COMPONENT	MATERIAL				
1	Seat	Dezincification Resistant Material				
2	Lift Aid Assembly	Dezincification Resistant Material				
3	Body	Bronze CC491K / C83600				
4	Piston	Dezincification Resistant Material				
5	Spring	Steel 1.4401				
6	Adjuster	Brass				
7	Сар	Brass				
8	Cover	Brass				
9	Lever	Brass				
10	Wire Lock	Steel & Lead				
11	O-Ring	EPDM				
12	Locking Slug	Nylon				
13	Spindle	Stainless Steel				
14	Seal	PTFE or EPDM				

Dimensions

Size (Inlet x Outlet)	Dim A mm (inches)	Dim B mm (inches)	Height (L)	Height (C) mm (inches)	
DN15 (½") x DN20 (¾")	37.0 (1.46)	32.0 (1.26)	130.0 (5.12)	120.5 (4.74)	
DN20 (¾") x DN25 (1")	42.0 (1.65)	37.0 (1.46)	156.0 (6.14)	146.5 (5.77)	
DN25 (1") x DN32(1 ¼")	50.0 (1.97)	42.0 (1.65)	174.0 (6.85)	164.5 (6.48)	
DN32 (1 ¼") x DN40 (1 ½")	59.0 (2.32)	50.0 (1.97)	222.5 (8.76)	211.5 (8.33)	
DN40 (1 ½") x DN50 (2")	69.0 (2.72)	59.0 (2.32)	256.5 (9.70)	246.5 (9.70)	
DN50 (2") x DN65 (2 ½")	78 (3.07)	83.5 (3.28)	320.0 (12.60)	310 (12.20)	

Approvals


- Designed in accordance with BS EN ISO-4126-1 &-7
- PED 2014/68/EU (CE)
- PE(S)R UK SI 2016 No. 1105 (UKCA)
- EAC
- WRAS
- KUKReg 4







Valve Drawing

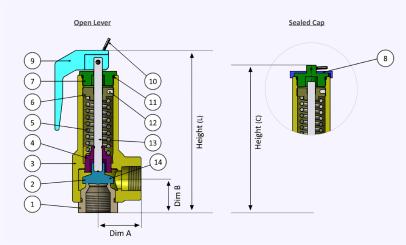

Easing Gear / Lifting Gear Options

Options:



Sealed lever (gas tight)

Sealed Cap (gas tight cap)





www.seetru.com | info@seetru.com | +44 (0) 117 930 6100

Discharge Capacities

LGS HI-FLOW Safety Relief Valves



HI-FLOW Di	HI-FLOW Discharge capacity for WATER at 10% over-pressure ^{1,2} Kdr = 0.26														
	DN In	15mn	n (½")	20mr	n (¾")	25mr	n (1")	32mm	(1¼")	40mm	n (1½")				
Valve size	DN Out			25mr	n (1")	32mm	n (1¼")	40mm	(1½")	50mm (2")					
	d _o (mm)				.0			3		4	0				
Set pressure (bar)	Set pressure (psi)	kg/hr	GPM (US)	kg/hr	- 1		GPM (US)	kg/hr	GPM (US)	kg/hr	GPM (US)				
0.2	2.9	1097.2	4.8	1950.6	8.6	3047.8	13.4	4993.4	22.0	7802.3	34.4				
1.0	14.5	2453.4	10.8	4361.6	19.2	6815.0	30.0	11165.7	49.2	17446.4	76.9				
2.0	29.0	3469.6	15.3	6168.2	27.2	9637.9	42.5	15790.7	69.6	24672.9	108.8				
4.0	58.0	4906.8	21.6	8723.2	38.5	13630.0	60.1	22331.4	98.5	34892.8	153.8				
6.0	87.0	6009.6	26.5	10683.7	47.1	16693.3	73.6	27350.2	120.6	42734.7	188.4				
8.0	116.0	6939.3	30.6	12336.5	54.4	19275.7	85.0	31581.3	139.2	49345.8	217.6				
10.0	145.0	7758.3	34.2	13792.6	60.8	21550.9	95.0	35309.0	155.7	55170.3	243.3				
12.0	174.0	8498.8	37.5	15109.0	66.6	23607.8	104.1	38679.1	170.5	60436.0	266.5				
15.0	217.5	9502.0	41.9	16892.4 74.5		26394.4	116.4	43244.5	190.7	67569.6	297.9				
20.0	290.0	10971.9	48.4	19505.7 86.0		30477.6	134.4	49934.5	220.2	78022.6	344.0				
24.0	348.0	12019.1	53.0	21367.4	94.2	33386.5 147.2		54700.5 241.2		85469.5	376.9				

Metric units are calculated to BS EN ISO4126-7:2013 and displayed in their customary units
 Imperial units are calculated to ASME Section VIII Division 1 and displayed in their customary units

HI-FLOW Di	ischarge capac	ity for <u>HC</u>	OT WATER	at 10% ov	er-pressur	e (Unvent	ed System	s)¹		Ko	dr = 0.38	
	DN In	15mr		20mr	n (¾")	25mr	n (1")	32mm	n (1¼")	40mm	า (1½")	
	DN Out			25mr	n (1")	32mm	n (1¼")	40mm	າ (1½")		m (2")	
	d _o (mm)	1		2	.0			3	2	40		
Set pressure (bar)	Set pressure (psi)	kW	BTU/sec	kW BTU/sec		kW	kW BTU/sec		BTU/sec	kW	BTU/sec	
0.2	2.9	27.2	25.8	48.4	45.9	75.7	71.7	124.0	117.5	193.7	183.6	
1.0	14.5	46.7	44.2	83.0	78.7	129.7	122.9	212.5	201.4	332.0	314.6	
2.0	29.0	71.0	67.3	126.2	119.6	197.2	186.9	323.1	306.2	504.8	478.4	
4.0	58.0	119.6	113.3	212.6	201.5	332.2	314.9	544.3	515.9	850.4	806.0	
6.0	87.0	168.2	159.4	299.0	283.4	467.2	442.8	765.5	725.5	1196.0	1133.6	
8.0	116.0	216.8	205.5	385.4	365.3	602.2	570.8	986.7	935.2	1541.7	1461.2	
10.0	145.0	265.4	251.6	471.8	447.2	737.2	698.8	1207.9	1144.8	1887.3	1788.8	
12.0	174.0	314.0	297.6	558.2	529.1	872.2	826.7	1429.1	1354.5	2232.9	2116.4	
15.0	217.5	386.9	366.7	687.8 652.0		1074.8	1018.7	1760.9	1669.0	2751.4	2607.8	
20.0	290.0	508.4	481.9	903.9	903.9 856.7		1412.3 1338.6		2193.1	3615.5	3426.8	
24.0	348.0	605.6	574.0	1076.7	1020.5	1682.3	1594.5	2756.3	2612.5	4306.7	4082.0	

Calculations based on Hot Water at or above 100°C, using the Kdr of Gas
 Calculations are in accordance to BS EN ISO 4126-1:2004 National Annex NA

	ischarge capac				(11)		(- 11)				
	DN In	15mr		20mn	n (¾")	25mr	n (1")	32mm	1 (1¼")	40mm	1 (1½")
	DN Out	20mr	n (¾")	25mm (1")		32mm (1¼")		40mm	(1½")	50mm (2")	
	d _o (mm)				.0			3		40	
Set pressure (bar)	Set pressure (psi)		SCFM	I/sec	SCFM	I/sec	SCFM	I/sec	SCFM	I/sec	SCFM
0.2	2.9	16.1	34.2	28.6	60.7	44.7	94.9	73.2	155.5	114.4	243.0
1.0	14.5	27.6	58.6	49.0	104.1	76.6	162.7	125.5	266.5	196.1	416.4
2.0	29.0	41.9	89.0	74.5	158.3	116.5	247.3	190.8	405.2	298.2	633.2
4.0	58.0	70.6	150.0	125.6	266.7	196.2 416.7		321.5	682.7	502.3	1066.7
6.0	87.0	99.3	211.0	176.6	375.1	276.0 586.0		452.1	960.1	706.5	1500.2
8.0	116.0	128.1	271.9	227.7	483.4	355.7	755.4	582.8	1237.6	910.6	1933.7
10.0	145.0	156.8	332.9	278.7	591.8	435.5	924.7	713.5	1515.0	1114.8	2367.3
12.0	174.0	185.5	393.9	329.7	700.2	515.2	1094.1	844.1	1792.5	1318.9	2800.8
15.0	217.5	228.5	485.3	406.3 862.8		634.8	1348.1	1040.1	2208.7	1625.2	3451.1
20.0	290.0	300.3	637.7	533.9	1133.7	834.2	1771.4	1366.8	2902.3	2135.6	4534.9
24.0	348.0	357.7	759.6	636.0	1350.5	993.7	2110.1	1628.1	3457.2	2543.9	5401.9

¹ Metric units are calculated to BS EN ISO4126-7:2013 and converted to I/sec at 1.013 bar a. @ 15°C

² Imperial units are calculated to ASME Section VIII Division 1 and displayed in their customary u ³ To convert from l/sec (1.013 bar a. @ 15°C) to Nm3/hr (1.013 bar a. @ 0°C) multiply by 3.413

HI-FLOW Di	scharge capac	ity for SA	TURATED S	STEAM at	10% over-	pressure ^{1,2}	2,3,4			Kd	ir = 0.38	
	DN In			20mn	n (¾")	25mr	n (1")	32mm	(1¼")	40mm	(1½")	
	DN Out	20mr	n (¾")	25mm (1")		32mm	1 (1¼")	40mm	(1½")	50mm (2")		
	d₀(mm)	1		2			25			40		
Set pressure (bar)	Set pressure (psi)	kg/hr	lb/hr	kg/hr lb/hr		kg/hr	lb/hr	kg/hr	lb/hr	kg/hr	lb/hr	
0.2	2.9	37.6	95.8	66.9	170.4	104.5	266.2	171.3	436.2	267.6	681.6	
1.0	14.5	77.1	164.2	137.0	292.0	214.1	456.2	350.8	747.5	548.1	1167.9	
2.0	29.0	115.8	249.7	205.9	444.0	321.7	693.7	527.1	1136.6	823.6	1775.9	
4.0	58.0	192.1	420.7	341.5	748.0	533.7	1168.7	874.4	1914.8	1366.2	2991.9	
6.0	87.0	267.6	591.7	475.8	1052.0	743.4	1643.7	1218.0	2693.0	1903.1	4207.9	
8.0	116.0	342.7	762.7	609.2	1356.0	951.9	2118.7	1559.5	3471.3	2436.8	5423.8	
10.0	145.0	417.5	933.7	742.3	1660.0	1159.8	2593.7	1900.3	4249.5	2969.2	6639.8	
12.0	174.0	492.1	1104.7	874.8	1963.9	1366.9	3068.7	2239.5	5027.7	3499.2	7855.8	
14.0	217.5	566.7	1275.7	1007.5	2267.9	1574.2	3543.7	2579.2	5805.9	4030.0	9071.8	

¹ Metric units are calculated to BS EN ISO4126-7:2013 and displayed in their customary units
² Imperial units are calculated to ASME Section VIII Division 1 and displayed in their customary units
³ Calculations for saturated steam only
⁴ PTFE seals up to 14 bar, EPDM seals up to 2.5 bar - contact Seetru for details on maximum steam pressure for other seal materials



Pressure & Temperature valve

for liquid

hot water

P3W

Relief made from Brass

Protection against both excess temperature as well as over pressurisation

Features

- Size range: 1/2" (DN15) to 2 1/2" (DN65)
- Set Pressure Range: 0.4 to 12.5 bar
- Set Temperature: 90 95°C
- BSP taper male inlet connections
- BSP parallel outlet connections
- WRAS approved PTFE valve seal and silicone diaphragm
- Sealed lever
- WRAS Approved (all sizes and pressures) certificate number 2011005
- Designed in accordance with BS EN 1490 (Building valves. Combined temperature and pressure relief valves. Tests and requirements)
- Valves supplied pre-set at the required set pressure and temperature
- Test certificate supplied free of charge

Lever Type



Materials of Construction

	COMPONENT	MATERIAL
1	Inlet	Brass CW602N
2	Thermostat	Brass CW602N
3	Seal Assembly	Brass CW602N & PTFE
4	Body	Bronze CC491K
5	Piston Assembly	Brass CW602N
6	Spring	Stainless Steel 1.4401
7	Adjuster	Brass CW602N
8	Сар	Brass CW602N
9	Wire & Lead-Seal	Stainless Steel & Lead Seal
10	Lever	Bronze

Dimensions

Inlet	Outlet	Dim H (mm)	Dim A (mm)	Dim B (mm)	Dim C (mm)	Dim D (mm)	Dim E (mm)	Weight (kg)
1/2" BSPT (DN15)	1/2" BSPP (DN15)	302	129	144	33	61	32	1.1
3/4" BSPT (DN20)	3/4" BSPP (DN20)	302	129	144	37	62	32	1.1
1" BSPT (DN25)	1" BSPP (DN25)	372	156	176	42	77	37	1.8
1 1/4" BSPT (DN32)	1 1/4" BSPP (DN32)	393	182	184	50	77	50	2.4
1 1/2" BSPT (DN40)	1 1/2" BSPP (DN40)	456	231	192	59	91	58	4.0
2" BSPT (DN50)	2" BSPP (DN50)	509	258	191	69	119	69	5.6
2 1/2" BSPT (DN65)	2 1/2" BSPP (DN65)	538	314	191	78	107	74	11.1

Please Note:

The above DN sizes are correctly related to the inlet & outlet connections mentioned. Please be aware other manufacturers may not correctly match DN sizes listed to the connection sizes of their valves.

Thus, when comparing a Seetru P&T relief valve to a valve from a different manufacturer, please always compare kW rating and threaded connection size, not the DN size.


Standards & Approvals

 WRAS approved, meeting the requirements of the UK Water Supply Regulations.
 Certificate number 2011005.



 Designed in accordance with BS EN 1490 (Building valves. Combined temperature and pressure relief valves. Tests and requirements).

Dimensional Drawing

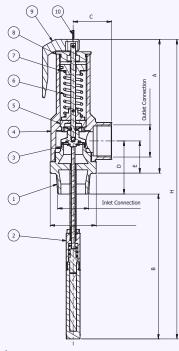



Discharge Capacities

P3W Pressure & Temperature Valve



Discharge Capacities

The discharge capacity of the relief valve must be equal to or greater than the output of the boiler it is intended to protect. Below are the discharge capacities for both the temperature relief and the conventional pressure relief.

The temperature rating should be used to size and select the valve.

Tempe	Temperature Rating, Hot Water														
Relief P	ressure	DN15 (1	/2" inlet)	DN20 (3	/4" inlet)	DN25 (:	I" inlet)	DN32 (1 1	L/4" inlet)	DN40 (1 1	L/2" inlet)	DN50 (2	2" inlet)	DN65 (2 1	L/2" inlet)
bar	psi	kW	Btu/sec	kW	Btu/sec	kW	Btu/sec	kW	Btu/sec	kW	Btu/sec	kW	Btu/sec	kW	Btu/sec
Nomin	al Power	Rating kV	V per BS E	N 1490											
1	14.5	10.0	9.5	25.0	23.7	50.0	47.4	75.0	71.1	100.0	94.8	-	-	-	-
Actual	Actual Power Rating kW per BS EN 4126-1 Annex NA														
1	14.5	38.1	36.1	49.2	46.6	87.4	82.8	136.5	129.4	223.7	212.0	349.5	331.3	546.2	517.7

Pressure Relief Rate, Hot Water

Set Pr	essure	DN15 (1,	/2" inlet)	DN20 (3)	/4" inlet)	DN25.(1" inlet)	DN32 (1 1	/4" inlet)	DN40 (1	L/2" inlet)	DN50.0	2" inlet)	DN65 (2 1/2" inle	
	L			51120 (3)		51125 (.		51132 (11	-,	51140 (2.		51130 (.		51103 (2)	.,
	psi	kW	Btu/sec	kW	Btu/sec	kW	Btu/sec	kW	Btu/sec	kW	Btu/sec	kW	Btu/sec	kW	Btu/sec
0.4	5.8	38.1	36.1	49.2	46.6	87.4	82.8	136.5	129.4	223.7	212.0	349.5	331.3	546.2	517.7
	14.5	49.4	46.8	63.8	60.5	113.4	107.5	177.2	168.0	290.4	275.2	453.7	430.1	708.9	672.0
1.5	21.75	58.9	55.8	76.0	72.0	135.1	128.1	211.2	200.1	346.0	327.9	540.5	512.3	844.6	800.5
	29	68.3	64.8	88.2	83.6	156.8	148.7	245.1	232.3	401.5	380.6	627.4	594.6	980.3	929.1
2.5	36.25	77.8	73.7	100.4	95.2	178.5	169.2	279.0	264.4	457.1	433.2	714.2	676.9	1115.9	1057.7
	43.5	87.2	82.7	112.6	106.8	200.3	189.8	312.9	296.6	512.6	485.9	801.0	759.2	1251.6	1186.3
3.5	50.75	98.6	93.4	127.3	120.7	226.3	214.5	353.6	335.1	579.3	549.1	905.2	858.0	1414.4	1340.6
	58	102.4	97.0	141.9	134.5	252.3	239.2	394.3	373.7	646.0	612.3	1009.4	956.7	1577.2	1494.9
4.5	65.25	121.3	114.9	156.6	148.4	278.4	263.9	435.0	412.3	712.7	675.5	1113.6	1055.5	1739.9	1649.2
	72.5	132.6	125.7	171.2	162.3	304.4	288.6	475.7	450.9	779.4	738.7	1217.8	1154.2	1902.7	1803.4
	87	155.3	147.2	200.5	190.1	356.5	337.9	557.1	528.0	912.7	865.1	1426.1	1351.7	2228.3	2112.0
	101.5	178.0	168.7	229.9	217.9	408.6	387.3	638.5	605.2	1046.1	991.5	1634.5	1549.2	2553.9	2420.6
	116	200.7	190.2	259.2	245.6	460.7	436.7	719.9	682.3	1179.4	1117.9	1842.9	1746.7	2879.5	2729.2
	130.5	223.4	211.7	288.5	273.4	512.8	486.0	801.3	759.5	1312.8	1244.3	2051.2	1944.2	3205.1	3037.8
		246.1	233.2	317.8	301.2	564.9	535.4	882.7	836.6	1446.1	1370.7	2259.6	2141.7	3530.6	3346.4
	159.5	268.8	254.7	347.1	328.9	617.0	584.8	964.1	913.7	1579.5	1497.1	2468.0	2339.2	3856.2	3655.0
12	174	291.5	276.2	376.4	356.7	669.1	634.2	1045.4	990.9	1712.9	1623.5	2676.3	2536.7	4181.8	3963.6
12.5	181.25	302.8	287.0	391.0	370.6	695.1	658.9	1086.1	1029.5	1779.5	1686.7	2780.5	2635.4	4344.6	4117.9



for compressed Air & Gas

hydrogen

Type 636 / 631

Safety valves with bronze body < Enclosed discharge valve with threaded connections <

Example Applications

- Air / gas compressors
- Pressure vessels
- Pneumatic systems
- Medical gases
- Technical gases

Specifications

- Inlet connections: 3/8" to 2" (depending on bore size)
- Temperature:-40°C to +200°C (depending on seal material)
- Pressure range: 0.32 to 55.2 bar (depending on bore size)

Materials of Construction

Component	Material	Grade
Inlet	Brass	CW614N
	Stainless Steel	1.4401 (316)
Body	Bronze	CC491K SB-62 C83600
Internal parts	Brass	CW614N
	Stainless Steel	1.4401 (316)
Spring	Stainless Steel	1.4310 (302)



Approvals

- Designed in accordance with BS EN ISO-4126-1 &-7
- PED 2014/68/EU (CE)
- PE(S)R UK SI 2016 No. 1105 (UKCA)
- ASME BPVC VIII.1 & XIII (UV)
- CRN
- EAC



Seetru Limited

Seal Materials

Seal Material	Temperature Range
Viton® (FKM)	-15°C to +200°C
Nitrile (NBR)	-40°C to +120°C

Standard seal materials shown, others are available.

Easing Gear / Lifting Gear Options

Standard option:

Rota-lift, twist type (not gas tight)

Other Options:



Sealed Cap (gas tight cap)



Unsealed lever (not gas tight)



Sealed lever (gas tight)



		_
	21	

Bore size	٥	9.5/10mm			13.7mm			17mm			20mm			25mm		
Inlet Size	3/8"	1/2"	3/4"	1/2"	3/4"	1"	1"	1 1/4"	1 1/2"	1"	1 1/4"	1 1/2"	1 1/4"	1 1/2"	2"	
Outlet Size		3/4"			1"			1 1/2"			2"			2"		
Flow Area		70.9mm² bove 1.55 ba	r)	147.7mm²			227mm²			314mm²						
H - Height (Rota-lift cap version)		102mm (up to 33 bar) 116mm (33-55.2 bar)			143mm (up to 35 bar) 172.5mm (35-49 bar)			204mm			227mm			252mm		
TÜV alloted outflow coefficient	0.78			0.71			0.74 (1.0 to 2.4 bar) 0.84 (2.4 to 35.0 bar)				6 (3.0 to 22.0 (22.0 to 35.			0.85		
NB Certified rated slope (ASME)	1.7	74 scfm/ps	ia	3.47 scfm/psia			5.60 scfm/psia			7.77 scfm/psia			12	sia		
Weight (approximate) Kg		0.8			1.1		3.6			4.0			5.1			
Set Pressure range - PED (CE) bar	0	.48 to 55.2	!	C).32 to 49.	0		1.0 to 35.0)		3.0 to 35.0)	Ĩ)		
Set Pressure range - ASME (UV) psi	22.5 to 800.4			2	0.3 to 710	.5	34	4.8 to 507	.5	4	3.5 to 507	.5	82.0 to 435.0			
Relieving pressure/fully open pressure				Set Pressure +10%												
Reseating pressure	Set Pressure -10% (0.3 bar minimum)															

Maximum permissible built up back pressure = 10% of set pressure at or below which flow is not reduced. Stable operation on flows down to 50% of valve rated capacity.

Standard Thread Connection Types



- BSP Parallel male thread
- BSP Taper male thread
- NPT male thread


Standard Outlet Connection Types



- BSP Parallel female thread
- NPT female thread

Valve Selection Guide



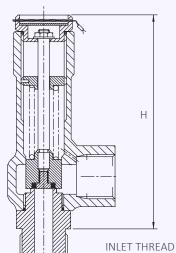

Approval Required	Valve type	Select Bore	Inlet Size	Thread Type	Outlet Thread Type	Easing Gear	Seal Material
DED (CE)	636 (Brass inlet)			Select Inlet			Viton® (FKM)
PED (CE)	656 (St. Steel inlet	Select bore size	Select inlet size		Select Outlet	Select easing	Nitrile (NRB)
PED (CE), ASME	631 (Brass inlet)	from above table	from above table	thread type	thread type	gear/top fitting	
(UV) & CR	651 (St. Steel inlet						Other

EAC marking available upon request

*Please send your selected details to Seetru and we can provide the full ordering code, price and lead-time.



Example	CE/PED	636	20	1 1/2"	BSP Taper	BSP parallel	Rota-lift	Viton	10.5 bar
Selection	Approval	Valve Type	Bore = 20mm	Inlet Size	Inlet Thread Type	Outlet Thread Type	Easing Gear	Seal	Set Pressure



Capacity Table - In accordance with TÜV, AIR at 0°C and 1013mbar. Normal m³/hour Type 636/656: Flow rates at 10% above the set pressure



Cat Duagouna	<u> </u>	Bore Size (D0)				
Set Pressure		9.5mm	13.7mm	17mm	20mm	25mm
bar	psi	Nm³/Hour	Nm³/Hour	Nm³/Hour	Nm³/Hour	Nm³/Hour
0.32	4.64		114.2			
0.48	6.96	48.9	124.5			
	14.5	76.9	164.9	241.8		
2	29	121.0	229.1	367.6		
3	43.5	162.4	307.5	560.2	701.4	
4	58	203.8	385.9	703.0	880.3	
5	72.5	245.3	464.3	845.9	1059.2	
5.65	81.93	272.2	515.3	938.7	1175.5	2054.3
6	87	286.7	542.7	988.7	1238.2	2163.7
7	101.5	328.1	621.2	1131.6	1417.0	2476.4
8	116	369.5	699.6	1274.5	1596.0	2789.0
9	130.5	410.9	778.0	1417.3	1774.9	3101.7
10	145	452.4	856.4	1560.2	1953.8	3414.3
15	217.5	659.5	1248.5	2274.5	2848.2	4977.5
20	290	866.6	1640.6	2988.7	3742.8	6540.7
25	362.5	1073.8	2032.7	3703.0	4881.2	8103.9
30	435	1280.9	2424.8	4417.3	5823.0	9667.1
35	507.5	1488.1	2816.9	5131.6	6764.6	
40	580	1695.2	3209.0			
45	652.5	1902.3	3601.1			
49	710.5	2068.0	3914.8			
50	725	2109.4				
55.2	800.4	2324.8				

For any intermediate pressures/flows please contact Seetru

Capacity Table - In accordance with ASME BPVC.XIII, AIR at 60°F and 14.7 psia/scfm. SCFM Type 631/651: Flow rates at 10% above the set pressure



6.1.0		Bore Size (D0)					
Set Pressure		9.5mm	13.7mm	17mm	20mm	25mm	
psi	bar	SCFM	SCFM	SCFM	SCFM	SCFM	
20.3	1.40		131.9				
22.5	2.50	68.7	139.4				
30	2.07	81.5	165.5				
34.8	2.80	90.6	183.8	296.7			
40	2.76	100.4	203.7	328.7			
43.5	3.00	106.9	217.0	350.2	486.0		
50	3.45	119.2	241.8	390.3	541.5		
82	5.66	179.3	363.9	587.3	814.9	1285.8	
100	6.90	213.2	432.6	698.1	968.7	1528.4	
150	10.34	307.2	623.4	1006.1	1395.9	2202.6	
200	13.79	401.2	814.2	1314.0	1823.2	2876.8	
250	17.24	495.3	1005.0	1621.9	2250.4	3550.8	
300	20.69	589.3	1195.8	1929.8	2677.6	4224.9	
350	24.14	683.3	1386.6	2237.8	3104.9	4899.1	
400	27.59	777.4	1577.4	2545.7	3532.2	5573.3	
435	30.00	843.2	1711.0	2761.2	3831.2	6045.2	
450	31.03	871.4	1768.2	2853.6	3959.3		
500	34.48	965.4	1959.0	3161.5	4386.6		
507.5	35.00	979.5	1987.6	3207.7	4450.7		
550	37.93	1059.4	2149.8				
600	41.38	1153.4	2340.6				
650	44.83	1247.5	2531.4				
700	48.28	1341.5	2722.2				
710.5	49.00	1361.3	2762.3				
750	51.72	1435.5					
800.4	55.20	1530.3					

For any intermediate pressures/flows please contact Seetru



RETURN TO CONTENTS PAGE

Seetru Limited

for compressed Air & Gas

hydrogen

Type 646 / <u>641</u>

Safety valves with Stainless Steel body < Enclosed discharge valve with threaded connections <

Example Applications

- Air / gas compressors
- Pressure vessels
- Pneumatic systems
- Medical gases
- Technical gases

Specifications

- Inlet connections: 3/8" to 2" (depending on bore size)
- Temperature:-40°C to +200°C (depending on seal material)
- Pressure range: 0.32 to 55.2 bar (depending on bore size)




Approvals

- Designed in accordance with BS EN ISO-4126-1 &-7
- PED 2014/68/EU (CE)
- PE(S)R UK SI 2016 No. 1105 (UKCA)
- ASME BPVC VIII.1 & XIII (UV)
- CRN
- EAC



Materials of Construction

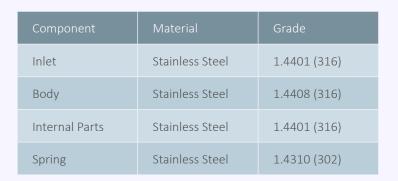

Seal Materials

Seal Material	Temperature Range
Viton® (FKM)	-15°C to +200°C
Nitrile (NBR)	-40°C to +120°C

Standard seal materials shown, others are available.

Easing Gear / Lifting Gear Options

• Standard option: Rota-lift cap, twist type (not gas tight)



• Other Options:



Sealed Cap (gas tight cap)



Sealed lever (gas tight)



	_
	V

Bore size	į	9.5/10mm			13.7mm		17mm		20mm			25mm			
Inlet Size	3/8"	1/2"	3/4"	1/2"	3/4"	1"	1"	1 1/4"	1 1/2"	1"	1 1/4"	1 1/2"	1 1/4"	1 1/2"	2"
Outlet Size		3/4"			1"			1 1/2"		2"			2"		
Flow Area	70.9mm² (above 1.55 bar)			147.7mm²		227mm²		314mm²			490.4mm²				
H - Height (Rota-lift cap version)	116mm			m (up to 3 mm (35-4		211mm		227mm		252mm					
TÜV alloted outflow coefficient	0.78		0.71 0.74 (1.0 to 2.4 0.84 (2.4 to 35.0			0.76 (3.0 to 22.0 bar) 0.80 (22.0 to 35.0 bar)		0.85							
NB Certified rated slope (ASME)	1.7	74 scfm/ps	ia	3.4	3.47 scfm/psia 5.60 scfm/psia		7.77 scfm/psia		12.26 scfm/psia						
Weight (approximate) Kg		0.8			1.1 3.6		4.0			5.1					
Set Pressure range - PED (CE) bar	0	.48 to 55.2	2	0.32 to 49.0		1.0 to 35.0		3.0 to 35.0		5.65 to 30.0					
Set Pressure range - ASME (UV) psi	22.5 to 800.4		2	0.3 to 710	.5	34.8 to 507.5		43.5 to 507.5		82.0 to 435.0					
Relieving pressure/fully open pressure	Set Pressure +10%														
Reseating pressure							Set I	Pressure -	10%						


Maximum permissible built up back pressure = 10% of set pressure at or below which flow is not reduced. Stable operation on flows down to 50% of valve rated capacity.

Standard Thread Connection Types




- BSP Parallel male thread
- BSP Taper male thread
- NPT male thread

Standard Outlet Connection Types



NPT female thread


Valves with Rota-lift Easing Gear

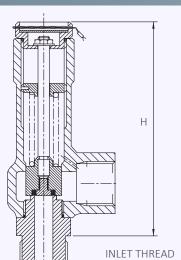



Approval Required	Valve type	Select Bore	Inlet Size	Inlet Thread Type	Outlet Thread Type	Easing Gear	Seal Material
PED (CE)	646	Select bore size	Select inlet size	Select Inlet	Select Outlet	Select easing	Viton® (FKM)
PED (CE), ASME		from above table	from above table	thread type	thread type	gear/top fitting	Nitrile (NRB)
(UV) & CRN	641						Other

EAC marking available upon request





^{*}Please send your selected details to Seetru and we can provide the full ordering code, price and lead-time.

Capacity Table - In accordance with TÜV, AIR at 0°C and 1013mbar. Normal m³/hour Type 646: Flow rates at 10% above the set pressure



Cat Drassura	Set Pressure		Bore Size (D0)						
Set Pressure		9.5mm	13.7mm	17mm	20mm	25mm			
bar	psi	Nm³/Hour	Nm³/Hour	Nm³/Hour	Nm³/Hour	Nm³/Hour			
0.32	4.64		114.2						
0.48	6.96	48.9	124.5						
1	14.5	76.9	164.9	241.8					
2	29	121.0	229.1	367.6					
3	43.5	162.4	307.5	560.2	701.4				
4	58	203.8	385.9	703.0	880.3				
5	72.5	245.3	464.3	845.9	1059.2				
5.65	81.93	272.2	515.3	938.7	1175.5	2054.3			
6	87	286.7	542.7	988.7	1238.2	2163.7			
7	101.5	328.1	621.2	1131.6	1417.0	2476.4			
8	116	369.5	699.6	1274.5	1596.0	2789.0			
9	130.5	410.9	778.0	1417.3	1774.9	3101.7			
10	145	452.4	856.4	1560.2	1953.8	3414.3			
15	217.5	659.5	1248.5	2274.5	2848.2	4977.5			
20	290	866.6	1640.6	2988.7	3742.8	6540.7			
25	362.5	1073.8	2032.7	3703.0	4881.2	8103.9			
30	435	1280.9	2424.8	4417.3	5823.0	9667.1			
35	507.5	1488.1	2816.9	5131.6	6764.6				
40	580	1695.2	3209.0						
45	652.5	1902.3	3601.1						
49	710.5	2068.0	3914.8						
50	725	2109.4							
55.2	800.4	2324.8							

For any intermediate pressures/flows please contact Seetru

Capacity Table - In accordance with ASME BPVC.XIII, AIR at 60°F and 14.7 psia/scfm. SCFM Type 641: Flow rates at 10% above the set pressure



Set Pressure		Bore Size (D0)						
Set Plessure		9.5mm	13.7mm	17mm	20mm	25mm		
psi	bar	SCFM	SCFM	SCFM	SCFM	SCFM		
20.3	1.40		131.9					
22.5	2.50	68.7	139.4					
30	2.07	81.5	165.5					
34.8	2.80	90.6	183.8	296.7				
40	2.76	100.4	203.7	328.7				
43.5	3.00	106.9	217.0	350.2	486.0			
50	3.45	119.2	241.8	390.3	541.5			
82	5.66	179.3	363.9	587.3	814.9	1285.8		
100	6.90	213.2	432.6	698.1	968.7	1528.4		
150	10.34	307.2	623.4	1006.1	1395.9	2202.6		
200	13.79	401.2	814.2	1314.0	1823.2	2876.8		
250	17.24	495.3	1005.0	1621.9	2250.4	3550.8		
300	20.69	589.3	1195.8	1929.8	2677.6	4224.9		
350	24.14	683.3	1386.6	2237.8	3104.9	4899.1		
400	27.59	777.4	1577.4	2545.7	3532.2	5573.3		
435	30.00	843.2	1711.0	2761.2	3831.2	6045.2		
450	31.03	871.4	1768.2	2853.6	3959.3			
500	34.48	965.4	1959.0	3161.5	4386.6			
507.5	35.00	979.5	1987.6	3207.7	4450.7			
550	37.93	1059.4	2149.8					
600	41.38	1153.4	2340.6					
650	44.83	1247.5	2531.4					
700	48.28	1341.5	2722.2					
710.5	49.00	1361.3	2762.3					
750	51.72	1435.5						
800.4	55.20	1530.3						



Compressed Air & Gas Steam

Type 63608

Safety valves with brass body and plastic outlet < Enclosed discharge valve with threaded connections <

Example Applications

- Air / gas compressors
- Pressure vessels
- Pneumatic systems
- Medical gases (non-flammable)
- Technical gases (non-flammable)

Specifications

- Inlet connections: 1/4" to 1/2"
- Temperature: -40°C to +200°C (depending on seal material)
- Pressure range: 0.3 to 13.2 bar

Materials of Construction

Component	Material	Grade
Inlet Body	Brass	CW602N
Outlet Body	PPS Plastic	40% glass filled
Internal parts	Brass	CW602N
Spring	Stainless Steel	1.4310 (302)



Approvals

- Designed in accordance with BS EN ISO-4126-1 &-7
- PED 2014/68/EU (CE)
- PE(S)R UK SI 2016 No. 1105 (UKCA)
- EAC

C€ 5½ EM

Seal Materials

Seal Material	Temperature Range
Viton® (FKM)	-15°C to +200°C
Nitrile (NBR)	-40°C to +120°C

Standard seal materials shown, others are available.

Easing Gear / Lifting Gear Options

Standard option – Rota-lift cap, twist type



	1	1	п
Ķ			
			ı

Bore size	7.9mm (63608)		
Inlet Size	1/4" 3/8" 1/2		1/2"
Outlet Size	3/8"		
Flow Area	49.02mm²		
H - Height (Rota-lift cap version)	57mm		
TÜV alloted outflow coefficient	0.46 from 0.3 to 0.8 bar 0.56 from 1.4 to 3.24 bar 0.63 from 3.24 to 13.2 bar		
Weight (approximate) Kg	0.5		
Set Pressure range - PED (CE) bar	0.3 to 13.2		
Relieving pressure/fully open pressure	Set pressure +10% (Below 1 bar = 0.1 bar)		
Reseating pressure	Set pressure-10% (0.3 bar minimum)		

Maximum permissible built up back pressure = 10% of set pressure at or below which flow is not reduced. Stable operation on flows down to 50% of valve rated capacity.

Standard Thread Connection Types




- BSP Parallel male thread
- BSP Taper male thread
- NPT male thread

Standard OUTLET Thread Connection Types

BSP Parallel female thread


Valve Drawing

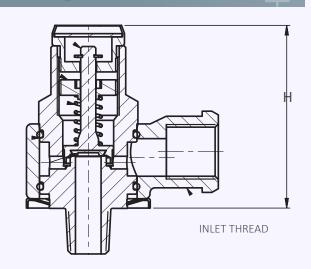

Valve Selection Guide

Approval Required	Valve type	Inlet Size	Inlet Thread Type	Outlet Thread Type	Easing Gear	Seal Material
						Viton® (FKM)
PED (CE)	63608	Select inlet size from above table	Select Inlet thread type	Select Outlet thread type	Select easing gear/top fitting	Nitrile (NBR)
					Other	

EAC marking available upon request





^{*}Please send your selected details to Seetru and we can provide the full ordering code, price and lead-time.

Capacity Table - In accordance with TÜV, AIR at 0°C and 1013mbar. Normal m³/hour Type 63608: Flow rates at 10% above the set pressure



Sat Draceura		Bore Size (D0)		
Set Pressure		7.9mm		
bar	psi	Nm³/Hour		
0.3	4.35	20.6		
0.8	11.6	29.1		
1.4	20.3	47.7		
2	29	60.0		
3	43.5	80.6		
4	58	113.8		
5	72.50	137.0		
6	87	160.1		
7	101.5	183.2		
8	116	206.4		
9	130.5	229.5		
10	145	252.7		
13.2	191.4	326.6		



Seetru Limited

for compressed air or gases

Type 86810

Safety valves with brass body and plastic outlet < Enclosed discharge valve with threaded connections <

Example Applications

- Air / gas compressors (non-flammable)
- Pressure vessels
- Pneumatic systems
- Medical gases (non-flammable)
- Technical gases (non-flammable)

Specifications

- Inlet connections: 1/2" to 3/4"
- Temperature:-15°C to +200°C
- Available Set Pressures: 7.0, 8.0, 9.3, 10.0, 10.5, 11.0, 11.5, 14.5 & 16.0 bar

Materials of Construction

Component	Material	Grade
Inlet Body	Brass	CZ121
Outlet Body	PPS Plastic	40% glass filled
Internal parts	Brass	CZ121
Spring	Stainless Steel	1.4310 (302)



Approvals

- Designed in accordance with BS EN ISO-4126-1 &-7
- PED 2014/68/EU (CE)
- PE(S)R UK SI 2016 No. 1105 (UKCA)
- EAC



Seal Materials

Seal Material	Temperature Range
Viton® (FKM)	-15°C to +200°C

Standard seal materials shown, others are available.

Easing Gear / Lifting Gear Options

• **Standard option** – Rota-lift cap, twist type (not gas tight)



_	_		

Bore size	10.0mm (86810)		
Inlet Size	1/2"	3/4"	
Outlet Size	3/4"		
Flow Area	78.5mm²		
H - Height (Rota-lift cap version)	84mm		
TÜV alloted outflow coefficient	ficient 0.78		
Weight (approximate) Kg	Weight (approximate) Kg 0.5		
Available Set Pressures, bar	7.0, 8.0, 9.3, 10.0, 10.5, 11.0, 11.5, 14.5 & 16.0		
Relieving pressure/fully open pressure	Set pressure +10%		
Reseating pressure	Set press	sure -10%	

Maximum permissible built up back pressure = 10% of set pressure at or below which flow is not reduced.


Standard Thread Connection Types



- BSP Parallel male thread
- BSP Taper male thread
- NPT male thread

Standard OUTLET Thread Connection Types

BSP Parallel female thread

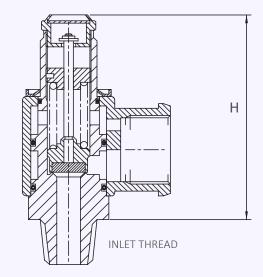

Valve Selection Guide

Approval Required	Valve type	Inlet Size	Inlet Thread Type	Outlet Thread Type	Easing Gear	Seal Material
DED (CE)	00010	Select inlet	Select Inlet	Select Outlet	Select easing	Viton® (FKM)
PED (CE)	E) 86810 size from thr	thread type	thread type	gear/top fitting	Other	

EAC marking available upon request





^{*}Please send your selected details to Seetru and we can provide the full ordering code, price and lead-time.

Capacity Table - In accordance with TÜV, AIR at 0°C and 1013mbar. Normal m³/hour Type 86810: Flow rates at 10% above the set pressure



	1	Bore Size (D0)	
Set Pressure		10	
bar	psi	Nm³/Hour	
7	101.5	363	
8	116	409	
9.3	134.85	468	
10	145	500	
10.5	152.25	524	
11	159.5	547	
11.5	166.75	570	
14.5	210.25	707	
16	232	776	



for compressed air or gases

cryogenic & liquefied gas

refrigeration

Type 346 / 356

Safety valves with either Bronze or Stainless Steel body < Enclosed discharge valve with threaded connections <

Example Applications

- Air/Gas systems
- Pressure vessels
- Medical gases
- Technical Gases
- CO2 refrigeration
- Ammonia refrigeration (34610)
- Cryogenic applications
- Liquefied gases

Specifications

- Inlet connections: 3/8" to 3/4"
- Temperature range:-196°C to +50°C
- Pressure range: 0.83 to 30.76 bar

Materials of Construction

Component	Material	Grade
Inlet	Stainless Steel	1.4401 (316)
Body	356 Valve = Bronze	C83600
	346 Valve = Stainless Steel	1.4408 (316)
Internal Parts	356 Valve = Brass	BS2874 CZ121
	346 Valve = Stainless Steel	1.4401 (316)
Spring	Stainless Steel	1.4310 (302)



Approvals

- Designed in accordance with BS EN ISO-4126-1 &-7
- PED 2014/68/EU (CE)
- PE(S)R UK SI 2016 No. 1105 (UKCA)
- ΕΔ(
- Materials meet the requirements of BAM for oxygen service.

C€ EN EN

Seal Materials

Seal Material	Temperature Range
PTFE	-196°C to +50°C

Standard seal materials shown, others are available.

Top Fitting Options

- Standard Option Sealed Cap (gas tight cap)



- Other options: Sealed lever (gas tight)





Bore size	9.5mm (34610)			9.5mm (34610)			9.5mm (35610)		
Inlet Size	3/8"	1/2"	3/4"	3/8"	1/2"	3/4"			
Outlet Size		3/4"			3/4"				
Flow Area	7	70.9mm	2		70.9mm	2			
H - Height (Rota-lift cap version)		113mm		99mm					
TÜV alloted outflow coefficient	0.6 (0	.83 to 3.	0 bar)	bar) 0.6 (0.83 to 3.0 bar)					
Weight (approximate) Kg	0.7 (3.	0 to 30.1	76 bar)	0.7 (3.	0 to 30.	76 bar)			
Set Pressure range - PED (CE) bar	0.8								
Relieving pressure/fully open pressure	Set pressure +10%								
Reseating pressure		S	et press	ure -109	%				

Maximum permissible built up back pressure = 10% of set pressure at or below which flow is not reduced. Stable operation on flows down to 50% of valve rated capacity.

Standard Thread Connection Types

- BSP Parallel male thread
- BSP Taper male thread
- NPT male thread

Standard Outlet Connection Types

- BSP Parallel female thread
- NPT female thread

Valve Selection Guide


Body Material	Valve Type	Select Bore	Inlet Size	Inlet Thread Type	Outlet Thread Type	Easing Gear	Seal Material
Stainless Steel	346	0.5	Select inlet size	Select Inlet thread	Select Outlet	Cll	DTEE
Bronze	356	9.5mm	from above table	type	thread type	Sealed cap	PTFE


EAC marking available upon request

Example	Bronze	356	9.5	1/2"	NPT	NPT	Sealed Cap	PTFE	23.5 bar
Selection	Body Material	Valve Type	Bore = 9.5mm	Inlet Size	Inlet Thread Type	Outlet Thread Type	Top Fitting	Seal	Set Pressure












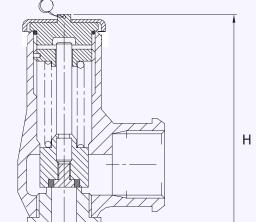

^{*}Please send your selected details to Seetru and we can provide the full ordering code, price and lead-time.

Capacity Table - In accordance with TÜV, AIR at 0°C and 1013mbar. Normal m³/hour Type 346/356: Flow rates at 10% above the set pressure



0.15	Cat Duassura			
Set Pressure		9.5mm		
bar	psi	Nm³/Hour		
0.83	12.04	54.8		
1.0	14.50	61.2		
2.0	29.00	93.0		
3.0	43.50	125.0		
4.0	58.00	183.0		
5.0	72.50	220.0		
6.0	87.00	257.0		
7.0	101.50	294.5		
8.0	116.00	331.7		
9.0	130.50	369.0		
10.0	145.00	406.0		
15.0	217.50	592.0		
20.0	290.00	778.0		
25.0	362.50	964.0		
30.0	435.00	1149.6		
30.76	446.02	1178.0		



for compressed air or gases

steam

cryogenics & liquefied gases

hydrogen

Seetru Limited

Type 936 Threaded

Safety valves made with brass inlets< Enclosed discharge valve with threaded connections< Metal to metal sealing<

Example Applications

- Air / gas compressors
- Pressure vessels
- Medical gases/Technical gases
- Thermal relief
- Steam systems

Specifications

- Inlet connections: 1/2" to 2" threaded connections (depending on valve bore size) (for flanged connections see 946 Flanged datasheet).
- Temperature range:-196°C to +250°C (depending on body o'ring material)
- Pressure range: 0.3 to 28.0 bar (depending on valve bore size)



Approvals

- Designed in accordance with BS EN ISO-4126-1 &-7
- PED 2014/68/EU (CE)
- PE(S)R UK SI 2016 No. 1105 (UKCA)
- EAG
- Leak tightness at 90% set pressure to API 527 and in accordance with EN ISO 4126-1
- Materials meet the requirements of BAM (Germany) for oxygen service

CE FR FH

Materials of Construction

Component	Material	Grade
Inlet	Brass	CZ132 / CW602N
Outlet Body (10mm bore valve)	Bronze	SB-62 C8360
Outlet Body (15, 20 & 25mm bore valves)	Stainless Steel	1.4408 (316)
Spring	Stainless Steel	1.4310 (302)
Disc	Stainless Steel	1.4401 (316)

Seal Materials

This valve using metal to metal sealing. There is a choice of o'ring used for the sealed cap/lever.

O'ring material	Temperature Range
Viton® (FKM)	-20°C to +250°C
Nitrile (NBR)	-196°C to +150°C
Silicone	-50°C to +250°C
PTFE	-196°C to +250°C
EPDM	-40°C to +150°C

-196°C is only suitable for sealed cap/sealed lever valves Standard seal materials shown, others are available.

Easing Gear / Lifting Gear / Top Fitting Options

Sealed Cap (gas tight cap)



Sealed lever (gas tight)



Rota-lift (not gas tight)



Open Lever (not gas tight)





RETURN TO CONTENTS PAGE

Bore size	10mm (93610)		10mm (93610) 15mm (93615)		20	0mm (9362	20)	25mm (93625)					
Inlet Size	1/2" 3/4" 1"			1"	1 1/4"	1 1/2"	1"	1 1/4"	1 1/2"	1"	1 1/4"	1 1/2"	2"
Outlet Size		1"			1 1/2"		2"		2"				
Flow Area		78.5mm²			177mm²			314mm²			491	mm²	
H - Height (Sealed Lever version)	114mm		168mm		141mm		225mm						
TÜV alloted outflow coefficient	0.83	(above 3.0	bar)	0.74 (above 3.0 bar)		0.8	(above 4.0	bar)	0	.8 (abov	e 4.0 ba	r)	
Weight (approximate) Kg		1.0		2.1			3.5			4	.2		
Set Pressure range - PED (CE) bar	0.3 to 28.0			0.3 to 28.0			0.3 to 28.0 0.3 t			0.3 to	20.0		
Relieving pressure/fully open pressure	Set pressure +10% (0.1 bar below 1.0 bar)												
Reseating pressure	Set pressure -10% (0.3 bar below 3.0 bar)												

- TÜV alloted outflow coefficients for pressures above 3.0/4.0 bar, for lower pressures please see the flow rate tables or contact Seetru.
- Maximum permissible built up back pressure = 10% of set pressure at or below which flow is not reduced.
- Stable operation on flows down to 50% of valve rated capacity.
- Leak tightness at 90% set pressure to API 527 and in accordance with EN ISO 4126-1

Standard INLET Connection Types




- BSP parallel male thread
- BSP taper male thread
- NPT male thread
- BSP parallel female thread (limited option)

Standard OUTLET Connection Types

BSP parallel female thread

Valve Drawing

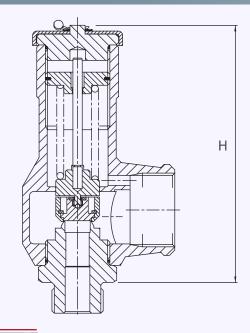


Valve Selection Guide

Valve type	Select Bore	Inlet Size	Inlet Thread Type	Top Fitting	O'ring material (for cap)	Set pressure
936	Select bore size from above table	Select inlet size from above table	Select Inlet Thread type	Select easing gear/top fitting	See table	Set pressure from available range

EAC marking available upon request

*Please send your selected details to Seetru and we can provide the full ordering code, price and lead-time.





Capacity Table - In accordance with TÜV, AIR at 0°C and 1013mbar. Normal m³/hour Type 936: Flow rates at 10% above the set pressure



		Bore Size (D0)						
Set Pressure	Set Pressure		15mm	20mm	25mm			
bar	psi	Nm³/Hour	Nm³/Hour	Nm³/Hour	Nm³/Hour			
0.3	4.35	39	76	174	220			
0.5	7.25	56	104	238	304			
1	14.5	84	155	354	458			
2	29	135	270	554	838			
3	43.5	191	384	738	1154			
4	58	240	482	926	1448			
5	72.5	289	580	1115	1742			
6	87.00	338	678	1303	2036			
7	101.5	386	776	1491	2330			
8	116	425	874	1679	2625			
9	130.5	484	972	1868	2919			
10	145	533	1070	2056	3213			
15	217.5	777	1560	2998	4685			
20	290	1021	2049	3939	5848			
25	362.5	1266	2539	4881				
28	406	1412	2833	5446				

For any intermediate pressures/flows please contact Seetru

Capacity Table - In accordance with TÜV, STEAM. Kg/hour Type 936: Flow rates at 10% above the set pressure



Cot Brossins		Bore Size (D0)						
Set Pressure	Set Flessure		15mm	20mm	25mm			
bar	psi	Kg/hour of Steam	Kg/hour of Steam	Kg/hour of Steam	Kg/hour of Steam			
0.3	4.35	32.5	63.3	145.3	182.3			
0.5	7.25	44.5	82.5	188.7	242.2			
1	14.5	66.1	121.7	278.4	361.9			
2	29	106.2	213.4	437.8	663.0			
3	43.5	149	299	576	901			
4	58	186	373	718	1122			
5	72.5	222	446	860	1343			
6	87.00	259	520	1000	1563			
7	101.5	295	592	1142	1784			
8	116	332	666	1283	2004			
9	130.5	368	738	1423	2224			
10	145	405	812	1563	2442			
15	217.5	585	1174	2261	3533			
20	290	765	1535	2957	4389			
25	362.5	947	1900	3655				
28	406	1055	2116	4078				



for compressed air or gases steam cryogenics & liquefied gases

Seetru Limited

Type 946 Threaded

Safety valves made from Stainless Steel < Enclosed discharge valve with threaded connections < Metal to metal sealing <

Example Applications

- Air / gas compressors
- Pressure vessels
- Medical gases/Technical gases
- Refrigeration (including ammonia)
- Thermal relief
- Steam systems
- Hydrogen

Specifications

- Inlet connections: 1/2" to 2" threaded connections (depending on valve bore size) *For flanged connections see datasheet 946 Flanged
- Temperature range: -50°C to +250°C (depending on body o'ring material)
- Pressure range: 0.3 to 28.0 bar (depending on valve bore size)



Approvals

- Designed in accordance with BS EN ISO-4126-1 &-7
- PED 2014/68/EU (CE)
- PE(S)R UK SI 2016 No. 1105 (UKCA)
- Leak tightness at 90% set pressure to API 527 and in accordance with EN ISO 4126-1

C€ HE FILL

Materials of Construction

Component	Material	Grade
Inlet	Stainless Steel	1.4401 (316)
Body	Stainless Steel	1.4408 (316)
Internal Parts	Stainless Steel	1.4401 (316)
Spring	Stainless Steel	1.4310 (302)
Disc	Stainless Steel	AISI 440B

Seal Materials

O'ring material – Top cap	Temperature Range
Viton® (FKM)	-20°C to +250°C
Nitrile (NBR)	-30°C to +150°C
Silicone	-50°C to +250°C
EPDM	-40°C to +150°C

Standard seal materials shown, others are available.

Easing Gear / Lifting Gear / Top Fitting Options

Sealed Cap (gas tight cap)




Sealed lever (gas tight)



Rota-lift (not gas tight)







Bore size	10mm (94610)		15mm (94615)		20	0mm (9462	20)	25mm (94625)					
Inlet Size	1/2"	3/4"	1"	1"	1 1/4"	1 1/2"	1"	1 1/4"	1 1/2"	1"	1 1/4"	1 1/2"	2"
Outlet Size		1"		1 1/2"		2"			2"				
Flow Area	78.5mm²		177mm²		314mm²			491mm²					
H - Height (Sealed Lever version)	114mm		168mm		141mm		225mm						
TÜV alloted outflow coefficient	0.83	(above 3.0	bar)	0.74 (above 3.0 bar)		0.8	(above 4.0	bar)	0	.8 (abov	e 4.0 ba	r)	
Weight (approximate) Kg		1.0		2.1		3.5			4.2				
Set Pressure range - PED (CE) bar		0.3 to 28.0		0.3 to 28.0			0.3 to 28.0			0.3 to 20.0			
Relieving pressure/fully open pressure		Set pressure +10% (0.1 bar below 1.0 bar)											
Reseating pressure					(0	Set pressu 0.3 bar belo							


- TÜV alloted outflow coefficients for pressures above 3.0/4.0 bar, for lower pressures please see the flow rate tables or contact Seetru.
- Maximum permissible built up back pressure = 10% of set pressure at or below which flow is not reduced.
- Stable operation on flows down to 50% of valve rated capacity. Leak tightness at 90% set pressure to API 527 and in accordance with EN ISO 4126-1

Standard INLET Connection Types




- BSP parallel male thread
- BSP taper male thread
- NPT male thread
- BSP parallel female thread (limited option)

Standard OUTLET Connection Types




Valve Drawing

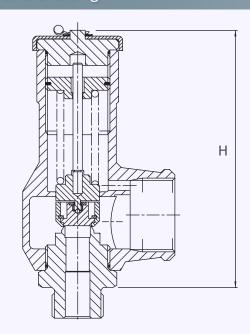

Valve Selection Guide

Valve type	Select Bore	Inlet Size	Inlet Thread Type	Top Fitting	O'ring material (for cap)	Set pressure
946	Select bore size from above table	Select inlet size from above table	Select Inlet Thread type	Select easing gear/top fitting	See table	Set pressure from available range

EAC marking available upon request





^{*}Please send your selected details to Seetru and we can provide the full ordering code, price and lead-time.

Capacity Table - In accordance with TÜV, AIR at 0°C and 1013mbar. Normal m³/hour Type 946: Flow rates at 10% above the set pressure



S-A Duranum		Bore Size (D0)						
Set Pressure		10mm	15mm	20mm	25mm			
bar	psi	Nm³/Hour	Nm³/Hour	Nm³/Hour	Nm³/Hour			
0.3	4.35	39	76	174	220			
0.5	7.25	56	104	238	304			
1	14.5	84	155	354	458			
2	29	135	270	554	838			
3	43.5	191	384	738	1154			
4	58	240	482	926	1448			
5	72.5	289	580	1115	1742			
6	87.00	338	678	1303	2036			
7	101.5	386	776	1491	2330			
8	116	425	874	1679	2625			
9	130.5	484	972	1868	2919			
10	145	533	1070	2056	3213			
15	217.5	777	1560	2998	4685			
20	290	1021	2049	3939	5848			
25	362.5	1266	2539	4881				
28	406	1412	2833	5446				

For any intermediate pressures/flows please contact Seetru

Capacity Table - In accordance with TÜV, STEAM. Kg/hour Type 946: Flow rates at 10% above the set pressure



Sat Busanus		Bore Size (D0)						
Set Pressure		10mm	15mm	20mm	25mm			
bar	psi	Kg/hour of Steam	Kg/hour of Steam	Kg/hour of Steam	Kg/hour of Steam			
0.3	4.35	32.5	63.3	145.3	182.3			
0.5	7.25	44.5	82.5	188.7	242.2			
1	14.5	66.1	121.7	278.4	361.9			
2	29	106.2	213.4	437.8	663.0			
3	43.5	149	299	576	901			
4	58	186	373	718	1122			
5	72.5	222	446	860	1343			
6	87.00	259	520	1000	1563			
7	101.5	295	592	1142	1784			
8	116	332	666	1283	2004			
9	130.5	368	738	1423	2224			
10	145	405	812	1563	2442			
15	217.5	585	1174	2261	3533			
20	290	765	1535	2957	4389			
25	362.5	947	1900	3655				
28	406	1055	2116	4078				



Type 33020 / 34020 / 34320

for compressed air & gas

hydrogen

Seetru Limited

Safety valves made with a Brass or Stainless Steel body and Stainless Steel inlets <

Enclosed discharge valve with threaded connections <

Elastomer rubber sealing <

Example Applications



- Pressure vessels
- Pneumatic systems
- Medical gases/Technical gases
- Hydrogen (with 316 stainless steel inlet)



Specifications

- Inlet connections: 3/8" to 1/2" threaded inlet connections
- Temperature range:-40°C to +200°C (depending on body rubber seal material)
- Pressure range: 55.0 to 103.4 bar



- Designed in accordance with BS EN ISO-4126-1 &-7
- PED 2014/68/EU (CE)
- PE(S)R UK SI 2016 No. 1105 (UKCA)
- EAC



Materials of Construction

Component	Valve Type	Material	Grade
Inlet	33020	Stainless Steel	1.4305 (303)
	34020	Stainless Steel	1.4305 (303)
	34320	Stainless Steel	1.4401 (316)
Body	33020	Brass	CZ132
	34020	Stainless Steel	1.4408 (316)
	34320	Stainless Steel	1.4408 (316)
Spring	All	Stainless Steel	302

Drawing showing all component materials available upon request.

Seal Materials

O'ring material – Top cap	Temperature Range
Viton® (FKM)	-15°C to +200°C
Nitrile (NBR)	-40°C to +120°C

Standard seal materials shown, others are available.

Top fitting

Sealed Cap (gas tight cap)



THESE VALVES SHOULD ONLY BE TESTED FOR SET PRESSURE



Bore size	7.14mm	(33020)	7.14mm (34020)		7.14mm (34320)	
Inlet Size	3/8" 1/2"		3/8"	1/2"	3/8"	1/2"
Outlet Size	1/2"		1/2"		1/2"	
Flow Area	40.04mm²		40.04mm²		40.04mm²	
H - Height	96mm		96mm		96mm	
TÜV alloted outflow coefficient	0.	67	0.67		0.0	67
Weight (approximate) Kg	0	.8	0.8		0.8	
Set Pressure range - PED (CE) bar	55.0 to 1	103.4 bar	55.0 to 103.4 bar		55.0 to 103.4 bar	
Relieving pressure/fully open pressure	Set pressure +10%					
Reseating pressure			Set press	sure -15%		

Maximum permissible built up back pressure = 10% of set pressure at or below which flow is not reduced.


Standard INLET Connection Types

- BSP parallel male thread
- BSP taper male thread
- NPT male thread

Standard OUTLET Connection Types

- BSP parallel female thread
- NPT female thread


Valve Drawing

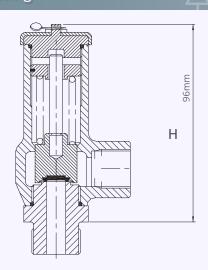

Valve Selection Guide

Valve type	Inlet Size	Inlet Size Inlet Thread Type		Seal Material	Set pressure
33020, 34020 or 34320 (see materials)	Select inlet size from above table	Select Inlet Thread type	Select Oulet Thread type	See table	Set pressure from available range

EAC marking available upon request





^{*}Please send your selected details to Seetru and we can provide the full ordering code, price and lead-time.

Capacity Table - In accordance with TÜV, AIR at 0°C and 1013mbar. Normal m³/hour Type 33020, 34020 & 34320: Flow rates at 10% above the set pressure



		Bore Size (D0)						
Set Pressure		7.14mm						
bar	psi	Nm³/Hour						
55	797.5	1124.0						
60	870	1224.5						
65	942.5	1325.0						
70	1015	1425.5						
75	1087.5	1526.0						
80	1160	1626.5						
85	1,232.50	1727.0						
90	1305	1827.5						
95	1377.5	1928.0						
100	1450	2028.5						
103.4	1499.3	2096.9						



for compressed air & gas

hydrogen



Safety valves made with a Brass or Stainless Steel body and Stainless Steel inlets < Type 33110 / 34110 / 34410

Enclosed discharge valve with threaded connections < Elastomer rubber sealing <

Example Applications

- Air / gas compressors
- Pressure vessels
- Pneumatic systems
- Medical gases/Technical gases
- Hydrogen (with 316 stainless steel inlet)



Specifications

- Inlet connections: 3/8" to 1/2" threaded inlet connections
- Temperature range:-40°C to +200°C (depending on body rubber seal material)
- Pressure range: 27 to 36 & 48.3 to 241.3 bar



- Designed in accordance with BS EN ISO-4126-1 &-7
- PED 2014/68/EU (CE)
- PE(S)R UK SI 2016 No. 1105 (UKCA)
- EAC



Materials of Construction

Component	Valve Type	Material	Grade
Inlet	33110	Stainless Steel	303
	34110	Stainless Steel	303
	34410	Stainless Steel	316
Body	33110	Brass	CZ122
	34110	Stainless Steel	316
	34410	Stainless Steel	316
Spring	All	Stainless Steel	302

Drawing showing all component materials available upon request.

Seal Materials

O'ring material – Top cap	Temperature Range
Viton® (FKM)	-15°C to +200°C
Nitrile (NBR)	-40°C to +120°C

Standard seal materials shown, others are available.

Top fitting

Sealed Cap (gas tight cap)



RETURN TO CONTENTS PAGE



Bore size	3.66mm	(33110)	3.66mm (34110)		3.66mm (34410)		
Inlet Size	3/8" 1/2"		3/8"	1/2"	3/8"	1/2"	
Outlet Size	3/8"	1/2"	3/8"	1/2"	3/8"	1/2"	
Flow Area	10.52mm²		10.52mm²		10.52mm²		
H - Height	92mm		92mm		92mm		
TÜV alloted outflow coefficient	0.	73	0.73		0.73		
Weight (approximate) Kg	0	.8	0.8		0.8		
Set Pressure range - PED (CE) bar	27 to 36 & 48.	.3 to 241.3 bar	27 to 36 & 48.	.3 to 241.3 bar	27 to 36 & 48.3 to 241.3 bar		
Relieving pressure/fully open pressure	Set pressure +10%						
Reseating pressure			Set press	sure -10%			

Maximum permissible built up back pressure = 10% of set pressure at or below which flow is not reduced.


Standard INLET Connection Types

- BSP parallel male thread
- BSP taper male thread
- NPT male thread

Standard OUTLET Connection Types

- BSP parallel female thread
- NPT female thread

Valve Drawing

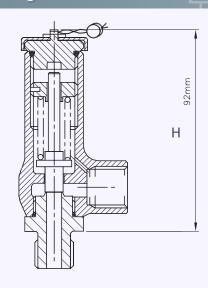

Valve Selection Guide

Valve type	Inlet Size	Inlet Thread Type	Outlet Thread Type	Seal Material	Set pressure
33110, 34110 or 34410 (see materials)	Select inlet size from above table	Select Inlet Thread type	Select Oulet Thread type	See table	Set pressure from available range

EAC marking available upon request



^{*}Please send your selected details to Seetru and we can provide the full ordering code, price and lead-time.

Capacity Table - In accordance with TÜV, AIR at 0°C and 1013mbar. Normal m³/hour Type 33110, 34110 and 34410: Flow rates at 10% above the set pressure



Set Pressure		Bore Size (D0)				
		3.66mm				
bar	psi	Nm³/Hour				
27	391.5	160.7				
30	435	177.9				
33	478.5	195.2				
36	522	212.5				
48	696	281.5				
50	725	293.0				
60	870.00	350.6				
70	1015	408.1				
80	1160	456.7				
90	1305	523.2				
100	1450	580.8				
150	2175	868.5				
200	2900	1156.2				
241	3494.5	1392.1				



for compressed air or gases

cryogenic & liquefied gas refrigeration

Seetru Limited

Type 329

Safety valves with either Bronze or Stainless Steel body < Enclosed discharge valve with threaded connections <

Example Applications

- Air/Gas systems
- Natural Gas
- CNG/LNG
- Pressure vessels
- Medical gases
- **Technical Gases**
- CO2 refrigeration
- Ammonia refrigeration (Stainless steel)
- Cryogenic applications
- Liquefied gases

Specifications

- Inlet connections: 3/8" to 3/4"
- Temperature range:-196°C to +70°C
- Pressure range: 53.0 to 370.0 bar

Materials of Construction

Component	Material	Grade
Inlet	Stainless Steel	1.4401 (316)
Body	Bronze	C83600
	Stainless Steel	1.4408 (316)
Internal Parts	Brass	BS EN 12164 CW614N
	Stainless Steel	1.4401 (316)
Spring	Stainless Steel	1.4310 (302)



Approvals

- Designed in accordance with BS EN ISO-4126-1 &-7
- PED 2014/68/EU (CE)
- PE(S)R UK SI 2016 No. 1105 (UKCA)
- ASME BPVC VIII.1 & XIII (UV)
- EAC
- CRN



Seal Materials

Seal Material	Temperature Range
PTFE (up to 202 bar) PPS (202 to 370 bar)	-196°C to +70°C

Standard seal materials shown, others are available.

Top Fitting Options

- Standard Option Sealed Cap (gas tight cap)





	-

Valve drawing

Bore size		6mm			
Inlet Size	3/8"	1/2"	3/4"		
Outlet Size		3/4"			
Flow Area		28.2mm²			
H - Height	100mm (53.0 to 240.0 bar) 114mm (240.0 to 370.0 bar)				
TÜV alloted outflow coefficient	0.77				
NB Certified rated slope (ASME)	0.7scfm/psia				
Weight (approximate) Kg	0.8				
Set Pressure range - PED (CE) bar		53.0 to 370.0			
Set Pressure range - ASME (UV) psi	768.5 to 5365.0				
Relieving pressure/fully open pressure	Set pressure +10%				
Reseating pressure	S	et pressure -15	%		



Standard Thread Connection Types



- BSP Taper male thread

NPT male thread

flow is not reduced.

Standard Outlet Connection Types



- BSP Parallel female thread
- NPT female thread




Valve Type	Body Material	Approval Required	Select Bore		Inlet Thread Type	Outlet Thread Type	Easing Gear	Seal Material
	Stainless Steel	PED (CE)		Select inlet size	Calast Inlat	Calast Outlat		
329 Stainless Steel Bronze	PED (CE), ASME (UV, NB), CRN	6mm	from above table	Select Inlet thread type	Select Outlet thread type	Sealed cap	PTFE	

EAC marking available upon request

Please send your selected details to Seetru and we can provide the full ordering code, price and lead-time

Example of Valve Selection Process







Н

Capacity Table - In accordance with TÜV, AIR at 0°C and 1013mbar. Normal m³/hour Type 329: Flow rates at 10% above the set pressure



C-t D		Bore Size (D0)				
Set Pressure	Set Pressure					
bar	psi	Nm³/Hour				
53	768.5	879.6				
60	870.0	993.8				
70	1015.0	1156.9				
80	1160.0	1320.0				
90	1305.0	1483.1				
100	1450.0	1646.3				
150	2175.0	2461.9				
200	2900.0	3277.5				
250	3625.0	4093.1				
300	4350.0	4908.7				
350	5075.0	5724.4				
370	5365.0	6050.6				

For any intermediate pressures/flows please contact Seetru

Capacity Table - In accordance with ASME BPVC.XIII, AIR at 60°F and 14.7 psia/scfm. SCFM Type 329: Flow rates at 10% above the set pressure

CIB	Sat Draceura			
Set Pressure		6mm		
psi	bar	SCFM		
768.5	53	602		
870	60	680		
913.5	63	714		
1203.5	83	937		
1305	90	1015		
1450	100	1127		
2175	150	1685		
2900	200	2243		
2929	202	2266		
3480	240	2690		
3625	250	2802		
4350	300	3360		
5075	350	3918		
5365	370	4141		



for compressed air & gas

hydrogen

Type B4605 / B6605 / 359 Enclosed discharge valve with threaded connections <

Safety valves made from Stainless Steel <

Seetru Limited

Example Applications

- Air/Gas compressors
- Natural Gas
- Pressure vessels
- Medical gases
- **Technical Gases**
- Hydrogen production/generation

Specifications

- Inlet connections: 3/8" and 1/2"
- Temperature range:
 - 0°C to 200°C (with 1.4057 (431) stainless steel inlet)
 - -50°C to 150°C (with 1.4401 (316) stainless steel inlet)
- Pressure range: 35.0 to 500.0 bar




Approvals

- Designed in accordance with BS EN ISO-4126-1 &-7
- PED 2014/68/EU (CE)
- PE(S)R UK SI 2016 No. 1105 (UKCA)
- ASME BPVC VIII.1 & XIII (UV)
- EAC
- CRN



Materials of Construction

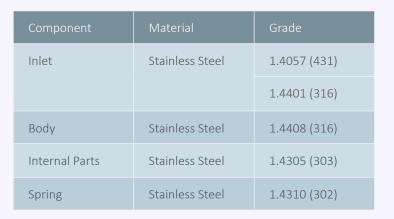

Inlet Seat Material

This valve seals using a metal ball design				
Seal Material	Temperature Range			
Stainless steel 1.4057 (431)	0°C to +200°C			
Stainless steel 1.4401 (316)	-50C to +150°C			

Standard seal materials shown, others are available.

Top Fitting Options

- Standard Option Sealed Cap (gas tight cap)








Bore size	4.6	mm		
Inlet Size	3/8"	1/2"		
Outlet Size	1/	['] 2"		
Flow Area	16.6mm²			
H - Height	96mm			
TÜV alloted outflow coefficient	0.402			
NB Certified rated slope (ASME)	0.34 scfm/psia			
Weight (approximate) Kg	0	.8		
Set Pressure range - PED (CE) bar	35.0 to	500.0		
Set Pressure range - ASME (UV) psi	507.5 to	7250.0		
Relieving pressure/fully open pressure	re Set pressure +10%			
Reseating pressure	Set press	sure -10%		

Maximum permissible built up back pressure = 10% of set pressure at or below which flow is not reduced

Valve drawing

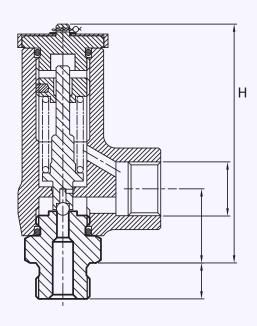

IMPORTANT NOTE:

These valves should only be tested for set pressure on liquid prior to final installation. Valves that are tested on air & fully lifted will cause damage to the sealing face.


Standard Thread Connection Types

- BSP Parallel male thread
- BSP Taper male thread
- NPT male thread

Standard Outlet Connection Types

- BSP Parallel female thread
- NPT female thread

Valve Selection Guide

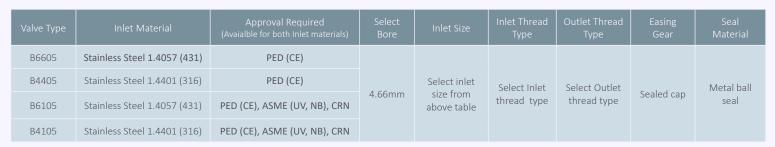

EAC marking available upon request

*Please send your selected details to Seetru and we can provide the full ordering code, price and lead-time.





Capacity Table - In accordance with TÜV, AIR at 0°C and 1013mbar. Normal m³/hour Flow rates at 10% above the set pressure



Cat Disassing		Bore Size (D0)				
Set Pressure	Set Pressure					
bar	psi	Nm³/Hour				
35	507.5	179.8				
50	725.0	254.9				
100	1450.0	505.2				
150	2175.0	755.5				
200	2900.0	1005.8				
250	3625.0	1256.0				
300	4350.0	1506.3				
350	5075.0	1756.6				
400	5800.0	2006.9				
450	6525.0	2257.2				
500	7250.0	2507.5				

For any intermediate pressures/flows please contact Seetru

Capacity Table - In accordance ASME section VIII Div I, AIR at 60°F and 14.7 psia/scfm. SCFM Flow rates at 10% above the set pressure

Set Pressure		Bore Size (D0)				
		4.6mm				
psi	bar	SCFM				
507.5	35	195				
725	50	276				
1450	100	547				
2175	150	818				
2900	200	1090				
3625	250	1361				
4350	300	1632				
5075	350	1903				
5800	400	2174				
6525	450	2445				
7250	500	2716				



for compressed air or gases

cryogenic & liquefied gas steam

hydrogen

Seetru Limited

Type 94605 / 946H5 / 95605 / 956H5

Safety valves made from stainles steel < Enclosed discharge with threaded connections <


Example Applications

- Air/Gas Compression
- Air/Gas Boosters
- Natural Gas
- Pressure Vessels
- Hydrogen Production
- Hydrogen Storage

Specifications

- **Inlet Connections**
 - 1/2" NPT, BSP & BSPT
 - 9/16" Cone & Thread
 - 3/4" Cone & Thread
- **Outlet Connections**
 - 1/2" NPT & BSP
 - 34" NPT & BSP
 - 1" NPT & BSP
- **Temperature Range**
 - 0° to 300°C as standard
 - -196°C to 300°C H₂ option
- **Pressure Range**
 - 35.0 to 515 bar (9*605)
 - 35.0 to 1100 bar (9*6H5)
 - *Maximum set pressure for steam is 85 bar

Materials of Construction

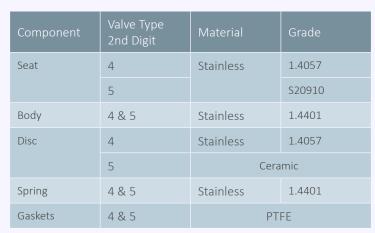

For Hydrogen applications above 515 bar, a ceramic disc is required, use type 956H5



Key Features

- Compact and space saving design
- Designed and built for repeatable operation
- Advanced sealing technology with super-lapped hard-faced seat and disc, designed to offer robust high-performance sealing
- Orientable gas-tight packed lever option (9*6H5 only)
- Simple and robust design with three moving parts
- Maintenance friendly design
- All wrought construction with no castings
- Designed with Hydrogen embrittlement resistant materials (H₂ option)

Approvals

- BS FN ISO 4126-1
- PED 2014/68/EU
 - Module B TÜV Rheinland
 - Module D LRQA Deutschland
- PE(S)R 2016 (UKCA)
 - Module B TÜV UK
 - Module D LRQA UK
- Seat tightness better than API 527 EAC marking available upon request

Top Fitting Options

Sealed Cap (gas tight cap)








Sealed lever (gas tight)



	1
	•

Model No.	9*(9*6H5			
Bore	4.6				
Inlet	1/2"	9/16"	1/2"	9/16"	3/4"
Outlet	1/	1/2"	3/4"	1"	
Flow Area	16.6				
Height H	158 202				
Kdr	0.78				
Weight	1.5	i kg	2.8 kg		

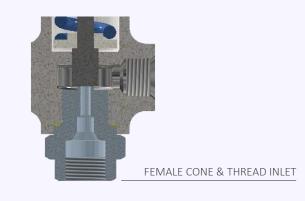

9*6H5

Standard INLET Connection Types




- BSP (male) max 515 bar
- BSPT (male) max 515 bar
- NPT (male) max 1034 bar
- Cone & Thread (female) max 1100 bar

K

Standard OUTLET Connection Types

- BSP (female)
- NPT (female)

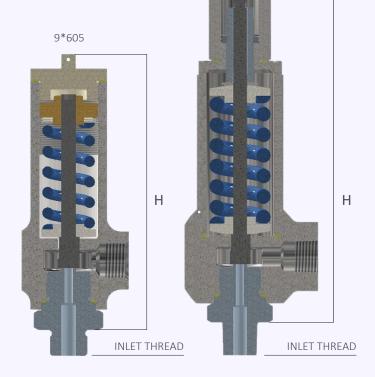

Please send your selected details to Seetru and we can provide the full ordering code, price and lead-time.

Valve Selection Guide - Type 94605, 946H5, 95605 & 956H5



Valve type	H ₂ or low temperature Valve type 2 nd digit		valve type 2 nd digit	Inlet Connection	Outlet Size	Outlet Connection	Easing Lever	
	Yes	No					(Sealed Lever)	
9*605		9/16" & 3/4"	C&T	1/2"				
33	-		1/2"	AUDT DOD DODT	_, _	NPT, BSP		0.4.0.1.5
	5	4	1/2"	NPT, BSP, BSPT			9*6H5 only	
9*6H5			9/16" & 3/4"	C&T	1/2", 3/4", 1"			

Example of Valve Selection Process for Order Code 956H5F1297



Example	Approval	Materials from above Table	Bore	Inlet Size	Inlet Thread	Outlet Size	Outlet Thread	Duty	Set Pressure
Selection	PED and UKCA (ASME in process)	5 = Body=1.4401, Seat=S20910, Disc=Ceramic	4.6mm	1/2"	NPT	3/4"	NPT	Hydrogen	1000 bar



Capacity Table -Per EN 4126-7 and at 10% Overpressure Type 94605 / 946H5 / 95605 / 956H5: Flow rates at 10% above the set pressure.



Set Pressure		Flow of Air			
bar	psi	kg/s	Nm³/hr	scfm	
35	507.5	0.121	336.8	209.4	
50	725	0.171	477.5	296.9	
75	1087.5	0.256	711.9	442.6	
100	1450	0.340	946.3	588.4	
150	2175	0.508	1415.2	879.9	
200	2900	0.676	1884.0	1171.4	
250	3625	0.844	2352.9	1462.9	
300	4350	1.013	2821.7	1754.4	
350	5075	1.181	3290.6	2045.9	
400	5800	1.349	3759.4	2337.4	
450	6525	1.518	4228.3	2628.9	
500	7250	1.686	4697.1	2920.5	
550	7975	1.854	5166.0	3212.0	
600	8700	2.022	5634.8	3503.5	
650	9425	2.191	6103.7	3795.0	
700	10150	2.359	6572.5	4086.5	
750	10875	2.527	7041.4	4378.0	
800	11600	2.695	7510.2	4669.5	
850	12325	2.864	7979.1	4961.0	
900	13050	3.032	8447.9	5252.5	
950	13775	3.200	8916.8	5544.0	
1000	14500	3.369	9385.6	5835.5	
1050	15225	3.537	9854.4	6127.0	
1100	15950	3.705	10323.3	6418.6	

Set Pre	ssure	Flow of Hy	drogen		
bar	psi	kg/s	Nm³/hr	scfm	
35	507.5	0.03	1258.83	782.68	
50	725	0.04	1774.51	1103.31	
75	1087.5	0.07	2621.46	1629.91	
100	1450	0.09	3453.31	2147.11	
150	2175	0.13	5074.04	3154.80	
200	2900	0.17	6641.10	4129.13	
250	3625	0.20	8158.40	5072.52	
300	4350	0.24	9629.46	5987.16	
350	5075	0.28	11057.42	6875.00	
400	5800	0.31	12445.12	7737.81	
450	6525	0.35	13795.13	8577.18	
500	7250	0.38	15109.78	9394.57	
550	7975	0.41	16391.19	10191.29	
600	8700	0.44	17641.29	10968.55	
650	9425	0.47	18861.85	11727.44	
700	10150	0.50	20054.50	12468.97	
750	10875	0.53	21220.73	13194.08	
800	11600	0.56	22361.91	13903.61	
850	12325	0.59	23479.32	14598.37	
900	13050	0.62	24574.12	15279.07	
950	13775	0.64	25647.41	15946.39	
1000	14500	0.67	26700.20	16600.97	
1050	15225	0.69	27733.43	17243.38	
1100	15950	0.72	28747.98	17874.18	



for compressed air or gases

steam

hygienic

Type 6G6 / 6G1

Clean Service/Hygienic Safety valves with Stainless Steel body < Enclosed discharge valve with Tri-Clamp inlet connections <

Safety valve for food industry & other hygienic applications including clean steam & gas applications


Example Applications

- Compressed air or gas
- Food production plants
- Hygienic applications
- Pressure vessels
- Medical gases
- Technical gases
- Steam systems

Specifications

- Inlet connections: 1/2" to 1" Tr-Clamp (depending on bore size)
- Temperature:-15°C to +200°C (depending on seal material)
- Pressure range: 0.32 to 55.2 bar (depending on bore size)
 - Maximum 12 bar for Steam Applications.

Materials of Construction

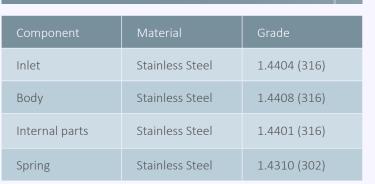

SURFACE FINISH

Process Contact Surface

In accordance with ASME BPE-2005 Table SF-5. Surface designation Ra Max 15 μinches, 0.4 μm, Electropolished.

Other Surfaces

Not greater than 60 $\mu inches$, 1.5 $\mu m.$

Approvals

- Designed in accordance with BS EN ISO-4126-1 &-7
- PED 2014/68/EU (CE)
- PE(S)R UK SI 2016 No. 1105 (UKCA)
- ASME BPVC VIII.1 & XIII (UV)
- CRN
- EAC



Seetru Limited

Seal Materials

Seal Material	Temperature Range
Perfluoroelastomer (FFKM)	-15°C to +200°C

Standard seal materials shown, others are available. Elastomer soft sealing specifically developed for food & pharmaceutical industries.

Compliant to:

- 1. FDA 21 CFR 177.2600
- 2. United States Pharmacopoeia (USP) Class VI
- ${\it 3. SP3A Sanitary Standards for Multiple Use Rubber Dairy Equipment No 18-03.}\\$

Easing Gear / Lifting Gear Options

Standard option:



Sealed Cap (gas tight cap)

Other Options:



Sealed lever (gas tight)

RETURN TO CONTENTS PAGE



www.seetru.com | info@seetru.com | +44 (0) 117 930 6100

Bore size	9.5mm (6G610/6G110)		13.7mm (66	613/6G113)	
Inlet Size	1/2"	1/2" 3/4"		1"	
Outlet Size	3/	/4"	1		
Flow Area	70.9	mm²	147.7mm²		
H - Height (Sealed cap version)	160	lmm	180mm		
TÜV alloted outflow coefficient	0.	78	0.71		
NB Certified rated slope (ASME)	1.71 sc	fm/psia	3.47 scfm/psia		
Weight (approximate) Kg	0	.9	1.3		
Set Pressure range - PED (CE) bar	0.48 to 55.2 (max	12 bar for Steam)	0.32 to 49.0 (max 12 bar for Stean		
Set Pressure range - ASME (UV) psi	22.5 to 800.4		20.3 to	710.5	
Relieving pressure/fully open pressure		ure +10% low 1.0 bar)	Set pressure + 10% (0.3 bar below 1.4 bar)		
Reseating pressure		Set pressure -10%	(0.3 bar minimum)		

Stable operation on flows down to 50% of valve rated capacity.


Standard Thread Connection Types

 Tri-Clamp® compatable generally in accordance with ASME BPE 2005 & BS 4825-3.

Standard Outlet Connection Types

BSP Female Pipe threads (G)

Valve drawing

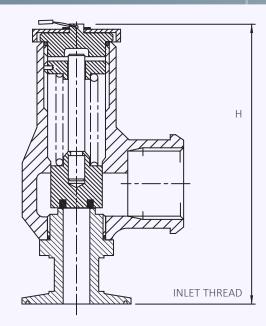

Valve Selection Guide

Approval Required	Valve type	Select Bore	Inlet Size	Easing Gear	Seal Material
PED (CE)	6G6	Select bore size	Select inlet size from above table	Select easing	Perfluroelastomer (FFKM)
PED (CE), ASME (UV) & CR	6G1	Select bore size from above table		gear/top fitting	Other

EAC marking available upon request

Example	PED, ASME & CRN	6G1	9.5mm	1/2"	Sealed Cap	Perfluroelastomer (FFKM)	3.5 bar
Selection	Approval	Valve Type	Bore Size	Inlet Size	Easing Gear	Seal	Set Pressure



^{*}Please send your selected details to Seetru and we can provide the full ordering code, price and lead-time.

Capacity Table - In accordance with TÜV, AIR at 0°C and 1013mbar. Normal m^3 /hour

Type 6G6: Flow rates at 10% above the set pressure

6.1.0	Sot Brossura		Bore Size (D0)			
Set Pressu	re AMI	9.5mm (6G610)	13.7mm (6G613)			
bar	psi	Nm³/Hour	Nm³/Hour			
0.32	4.64		114.2			
0.48	6.96	48.9	124.5			
1	14.5	76.9	164.9			
2	29	121.0	229.1			
3	43.5	162.4	307.5			
4	58	203.8	385.9			
5	72.5	245.3	464.3			
5.65	81.93	272.2	515.3			
6	87	286.7	542.7			
7	101.5	328.1	621.2			
8	116	369.5	699.6			
9	130.5	410.9	778.0			
10	145	452.4	856.4			
15	217.5	659.5	1248.5			
20	290	866.6	1640.6			
25	362.5	1073.8	2032.7			
30	435	1280.9	2424.8			
35	507.5	1488.1	2816.9			
40	580	1695.2	3209.0			
45	652.5	1902.3	3601.1			
49	710.5	2068.0	3914.8			
50	725	2109.4				
55.2	800.4	2324.8				

For any intermediate pressures/flows please contact Seetru

Capacity Table - In accordance ASME section VIII Div I, AIR at 60°F and 14.7 psia/scfm. SCFM

Type 6G1: Flow rates at 10% above the set pressure

Sot Prossure		Bore Size (D0)	
Set Pressu	re Mil	9.5mm (6G610)	13.7mm (6G613)
psi	bar	SCFM	SCFM
20.3	1.40		131.9
22.5	2.50	68.7	139.4
30	2.07	81.5	165.5
34.8	2.80	90.6	183.8
40	2.76	100.4	203.7
43.5	3.00	106.9	217.0
50	3.45	119.2	241.8
82	5.66	179.3	363.9
100	6.90	213.2	432.6
150	10.34	307.2	623.4
200	13.79	401.2	814.2
250	17.24	495.3	1005.0
300	20.69	589.3	1195.8
350	24.14	683.3	1386.6
400	27.59	777.4	1577.4
435	30.00	843.2	1711.0
450	31.03	871.4	1768.2
500	34.48	965.4	1959.0
507.5	35.00	979.5	1987.6
550	37.93	1059.4	2149.8
600	41.38	1153.4	2340.6
650	44.83	1247.5	2531.4
700	48.28	1341.5	2722.2
710.5	49.00	1361.3	2762.3
750	51.72	1435.5	
800.4	55.20	1530.3	

for compressed air or gases

steam

refrigeration

<u>hy</u>drogen

Seetru Limited

Type 946 Flanged

Safety valves made from Stainless Steel < Enclosed discharge valve with flanged connections < Metal to metal sealing <

Example Applications

- Air / gas compressors
- Pressure vessels
- Medical gases/Technical gases
- Refrigeration (including ammonia)
- Thermal relief
- Steam systems
- Hydrogen

Specifications

- Inlet connections: DN15 (1/2), DN20 (3/4") or DN25 (1")
 flange DIN EN1092 and ANSI flanges are available
- Temperature range:-50°C to +250°C (depending on body o'ring material)
- Pressure range: 0.3 to 28.0 bar




Approvals

- Designed in accordance with BS EN ISO-4126-1 &-7
- PED 2014/68/EU (CE)
- PE(S)R UK SI 2016 No. 1105 (UKCA)
- EAC
- Leak tightness at 90% set pressure to API 527 and in accordance with EN ISO 4126-1

C€ ₽₽ EH[

Materials of Construction

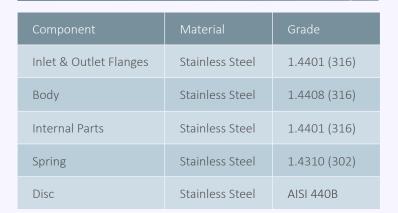

Seal Materials

o'ring used for the sealed cap/lever.

O'ring material – Top cap

Temperature Range

Viton® (FKM)

-20°C to +250°C

Nitrile (NBR)

-30°C to +150°C

Silicone

-40°C to +150°C


Standard seal materials shown, others are available.

Easing Gear / Lifting Gear / Top Fitting Options

Sealed Cap (gas tight cap)



Sealed lever (gas tight)







Bore size	10mm (94610) 15mm (9461			15mm (94615)
Inlet Size	DN15 (1/2")	DN20 (3/4")	DN25 (1")	DN25 (1")
Outlet Size		DN25 (1")		DN40 (1 1/2")
Flow Area	78.5mm² 177mm²			177mm²
H - Height (Sealed Lever version)	200mm 253mm			253mm
TÜV alloted outflow coefficient	0.83 (above 3.0 bar) 0.74 (above 3.0 b			0.74 (above 3.0 bar)
Weight (approximate) Kg	3.0 5.3			5.3
Set Pressure range - PED (CE) bar	0.3 to 28.0 0.3 to 28.0			0.3 to 28.0
Relieving pressure/fully open pressure	Set pressure +10% (0.1 bar below 1.0 bar)			
Reseating pressure			t pressure par below	

- TÜV alloted outflow coefficients for pressures above 3.0 bar, for lower pressures please see the flow rate tables or contact Seetru.
- Maximum permissible built up back pressure = 10% of set pressure at or below which flow is not reduced.
- Stable operation on flows down to 50% of valve rated capacity.
- Leak tightness at 90% set pressure to API 527 and in accordance with EN ISO 4126-1.


Standard INLET Connection Types

- DIN EN1092 Flange PN16, PN25 or PN40
- ASME Flange CL150, CL300 or CL600


Standard OUTLET Connection Types

- DIN EN1092 Flange PN16, PN25 or PN40
- ASME Flange CL150 or CL300

Valve Drawing

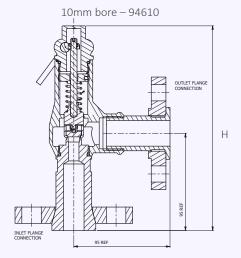

15mm bore - 94615

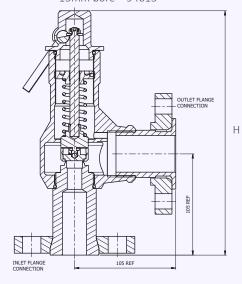

Valve Selection Guide

Valve type	Select Bore	Inlet Size	Inlet Flange Type	Outlet Flange Type	Easing Gear	O'ring material (for cap)
946	Select bore size from above table	Select inlet size from above table	Select Inlet Flange type	Select Outlet Flange type	Select easing gear/top fitting	See table

EAC marking available upon request





^{*}Please send your selected details to Seetru and we can provide the full ordering code, price and lead-time.

Capacity Table - In accordance with TÜV, AIR at 0°C and 1013mbar. Normal m³/hour Type 946: Flow rates at 10% above the set pressure



	<u> </u>		
Set Pressure		10mm	15mm
bar	psi	Nm³/Hour	Nm³/Hour
0.3	4.35	39	76
0.5	7.25	56	104
1	14.5	84	155
2	29	135	270
3	43.5	191	384
4	58	240	482
5	72.5	289	580
6	87.00	338	678
7	101.5	386	776
8	116	425	874
9	130.5	484	972
10	145	533	1070
15	217.5	777	1560
20	290	1021	2049
25	362.5	1266	2539
28	406	1412	2833

For any intermediate pressures/flows please contact Seetru

Capacity Table - In accordance with TÜV, STEAM. Kg/hour Type 946: Flow rates at 10% above the set pressure



	Set Pressure		Bore Size (D0)			
Set Pressure			15mm			
bar	psi	Kg/hour of Steam	Kg/hour of Steam			
0.3	4.35	32.5	63.3			
0.5	7.25	44.5	82.5			
1	14.5	66.1	121.7			
2	29	106.2	213.4			
3	43.5	149	299			
4	58	186	373			
5	72.5	222	446			
6	87.00	259	520			
7	101.5	295	592			
8	116	332	666			
9	130.5	368	738			
10	145	405	812			
15	217.5	585	1174			
20	290	765	1535			
25	362.5	947	1900			
28	406	1055	2116			



for compressed air & gas

hydrogen

Type 64613 / 64113 Flanged

Safety valves with Stainless Steel body < Enclosed discharge valve with flanged connections <

Example Applications

- Air / gas compressors
- Pressure vessels
- Pneumatic systems
- Medical gases
- Technical gases

Specifications

- Inlet connections: DN20 (3/4") or DN25 (1") DIN or ANSI flanges
- Temperature: -40°C to +200°C (depending on seal material)
- Pressure range: 0.32 to 49.0 bar



Approvals

- Designed in accordance with BS EN ISO-4126-1 &-7
- PED 2014/68/EU (CE)
- PE(S)R UK SI 2016 No. 1105 (UKCA)
- ASME BPVC VIII.1 & XIII (UV)
- CRN
- EAC



Seetru Limited

Materials of Construction

Component	Material	Grade
Inlet	Stainless Steel	1.4401 (316)
Body	Stainless Steel	1.4408 (316)
Internal parts	Stainless Steel	1.4401 (316)
Spring	Stainless Steel	1.4310 (302)

Seal Materials

Seal Material	Temperature Range
Viton® (FKM)	-15°C to +200°C
Nitrile (NBR)	-40°C to +120°C


Standard seal materials shown, others are available.

Easing Gear / Lifting Gear Options

Standard Option: Sealed Cap (gas tight cap)



Other Option: Sealed lever (gas tight)







Valve Drawing



Bore size	13.7	'mm		
Inlet Size	Inlet Size DN20 (3/4") DN25 (1/2)			
Outlet Size	DN2	5 (1")		
Flow Area	147.4mm²			
H - Height (Sealed cap version)	197mm (up to 35 bar) 226mm (35-49 bar)			
TÜV alloted outflow coefficient	0.71			
NB Certified rated slope (ASME)	3.47 scfm/psia			
Weight (approximate) Kg	3.2			
Set Pressure range - PED (CE) bar	0.32 to 49.0			
Set Pressure range - ASME (UV) psi	20.3 to 710.5			
Relieving pressure/fully open pressure	Set pressure +10% (0.3 bar below 1.4 bar)			
Reseating pressure	Set pressure-10%	(0.3 bar minimum)		

Maximum permissible built up back pressure = 10% of set pressure at or below which flow is not reduced. Stable operation on flows down to 50% of valve rated capacity.

INLET THREAD

Standard Thread Connection Types

- DIN EN1092 Flange PN16, PN25 or PN40
- ASME Flange CL150, CL300 or CL600

Standard Outlet Connection Types



- DIN EN1092 Flange PN16, PN25 or PN40
- ASME Flange CL150, CL300 or CL600

Valve Selection Guide



Approval Required	Valve type		Inlet Flange Type	Outlet Flange Type	Easing Gear	Seal Material
PED (CE)	64613	Select inlet size	Select Inlet	Select Outlet	Select easing	Viton® (FKM)
PED (CE), ASME	64142	from above table	flange type	flange type	gear/top fitting	Nitrile (NBR)
(UV) & CRN	64113					Other

EAC marking available upon request



Example	PED, ASME & CRN	64113	DN20	DIN EN1092 Flange PN16	DIN EN1092 Flange PN16	Sealed Cap	Viton	3.5 bar
Selection	Approval	Valve Type	Inlet Size	Inlet Flange Type	Outlet Flange Type	Easing Gear	Seal	Set Pressure



^{*}Please send your selected details to Seetru and we can provide the full ordering code, price and lead-time.

Capacity Table - In accordance with TÜV, AIR at 0°C and 1013mbar. Normal m³/hour

Type 64613: Flow rates at 10% above the set pressure

6.1.		Bore Size (D0)
Set Pressu	re AMI	13.7mm
bar	psi	Nm³/Hour
0.32	4.64	114.2
0.48	6.96	124.5
1	14.5	164.9
2	29	229.1
3	43.5	307.5
4	58	385.9
5	72.5	464.3
5.65	81.93	515.3
6	87	542.7
7	101.5	621.2
8	116	699.6
9	130.5	778.0
10	145	856.4
15	217.5	1248.5
20	290	1640.6
25	362.5	2032.7
30	435	2424.8
35	507.5	2816.9
40	580	3209.0
45	652.5	3601.1
49	710.5	3914.8

For any intermediate pressures/flows please contact Seetru

Capacity Table - In accordance with ASME BPVC.XIII, AIR at 60°F and 14.7 psia/scfm. SCFM

Type 64113: Flow rates at 10% above the set pressure

Sat Draceura		Bore Size (D0)
Set Pressu	re Mil	13.7mm
psi	bar	SCFM
20.3	1.40	131.9
22.5	2.50	139.4
30	2.07	165.5
34.8	2.80	183.8
40	2.76	203.7
43.5	3.00	217.0
50	3.45	241.8
82	5.66	363.9
100	6.90	432.6
150	10.34	623.4
200	13.79	814.2
250	17.24	1005.0
300	20.69	1195.8
350	24.14	1386.6
400	27.59	1577.4
435	30.00	1711.0
450	31.03	1768.2
500	34.48	1959.0
507.5	35.00	1987.6
550	37.93	2149.8
600	41.38	2340.6
650	44.83	2531.4
700	48.28	2722.2
710.5	49.00	2762.3

Atmospheric Discharge Safety Relief Valves

for steam

Type 75008

Safety valves made from Brass < Atmospheric discharge with threaded connections <

Example Applications



- Industrial coffee machines
- Autoclaves / Steam sterilisers
- Small steam boilers



Specifications

Inlet connections: 1/4" to 1/2"

• Temperature: Up to 150°C (depending on seal material)

• Pressure range: 0.27 to 5.0 bar

Approvals

- Designed in accordance with BS EN ISO-4126-1 &-7
- PED 2014/68/EU (CE)
- PE(S)R UK SI 2016 No. 1105 (UKCA)
- EAC

C€ E¥ E¶

Materials of Construction

Component	Material	Grade
Body	Brass	BS2874 CZ132
Internal Parts	Brass	BS2874 CZ132
Spring	Stainless Steel	302 S56)

Seal Materials

Seal Material	Temperature Range
Silicone	-40°C to +150°C
EPDM	-45°C to +140°C
Aflas	-20°C to +200°C

Easing Gear / Lifting Gear Options

- Standard option Ring Pull
- Other options Rota Lift or Spindle lift




K	

Valves with Rota-lift Easing Gear



Bore size	7.9mm				
Inlet Size	1/4" 3/8" 1/2"				
Flow Area	49mm²				
TÜV alloted outflow coefficient	0.63				
Weight (approximate) Kg	0.1				
Set Pressure range - PED (CE) bar	0.27 to 5.0 bar				
Relieving Pressure/Fully Open Pressure	Set pressure +10% (0.1 bar below 1.0 bar)				
Reseating Pressure		pressure -1 par below 3.0			

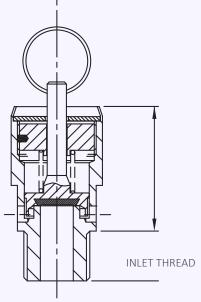

Standard Thread Connection Types



- BSP Parallel male thread
- BSP Taper male thread
- NPT male thread

Valve Selection Guide



Approval Required	Valve type	Inlet Size	Thread Type	Easing Gear	Seal Material
				Ring-Pull is	Silicone
PED (CE) 75008	75008	Select inlet size from above table	Select thread type	the standard option (see other	EPDM
				options)	Aflas

EAC marking available upon request



Example	CE	75008	1/4"	BSP Taper	Pull-Ring	Silicone	1.5 bar
Selection	Approval	Valve Type	Inlet Size	Thread Type	Easing Gear	Seal	Set Pressure



^{*}Please send your selected details to Seetru and we can provide the full ordering code, price and lead-time.

Capacity Table - In accordance with TÜV, STEAM Kg/Hr Type 75008 Flow rates at 10% above the set pressure



Set Pressure		Bore Size (D0)					
Set Flessure		3.2mm					
bar	psi	Kg/Hr of Steam					
0.27	3.9	16.7					
0.5	7.3	20.9					
1.0	14.5	32.2					
1.5	21.8	42.4					
2.0	29.0	51.6					
3.0	43.5	71.0					
4.0	58.0	88.4					
5.0	72.5	105.3					



Atmospheric Discharge Safety Relief Valves

Seetru Limited

for refrigeration

Type 319

Inline Safety Valves made from Brass < Atmospheric discharge valve with threaded connections <

Example Applications



- Industrial refrigeration
- Commercial refrigeration
- Ice making machinery
- Air conditioning

Specifications

- Inlet connections: 3/8" to 1/2" or 7/8" x 14UNF (depending on bore size)
- Temperature:-30°C to +200°C
- Pressure range: 13.5 to 55.2 bar (depending on bore size)




Approvals

- Designed in accordance with BS EN ISO-4126-1 &-7
- PED 2014/68/EU (CE)
- PE(S)R UK SI 2016 No. 1105 (UKCA)
- ASME BPVC VIII.1 & XIII (UV)
- CRN
- EAC



Materials of Construction

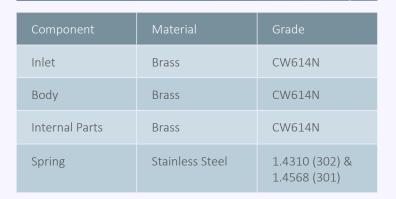

Seal Materials


Seal Material	Temperature Range
Perfluroelastomer (FFKM)	-30°C to +200°C

Standard seal materials shown, others are available.



Valve drawing

Bore size	9.5		13.08mm	
Inlet Size	3/8"	1/2"	1/2"	7/8" (UNF)
Outlet Size	1/2" or 5	/8" Flare	3/4" NP	Γ Female
Flow Area	71n	nm²	134.4	lmm²
H - Height	99r	nm	103mm	
TÜV alloted outflow coefficient	0.4	0.485 0.71		71
NB Certified rated slope (ASME)	1.04 scfm/psia 3.47 scfm/psi			fm/psia
Weight (approximate) Kg	0.8 1.3		.3	
Set Pressure range - PED (CE) bar	13.5 to 50.0 16.2 to 26.8		o 26.8	
Set Pressure range - ASME (UV) psi	195.75 to 725.0 235.0 to 388		o 388.6	
Relieving pressure/fully open pressure	Set pressure +10%			
Reseating pressure	Set pressure -10%			

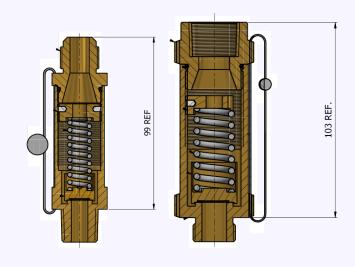

Maximum permissible built up back pressure = 10% of set pressure at or below which flow is not reduced. Stable operation on flows down to 50% of valve rated capacity.

Standard INLET Thread Connection Types

- NPT male thread
- UNF male thread

Standard OUTLET Thread Connection Types


- Flare outlet
- NPT female thread

Valve Selection Guide



Approval Required	Select Bore	Inlet Size	Inlet Thread Type	Outlet Threa Type	Seal Material
PED (CE)	Calaat haaraaisaa	C-1+:- -+-:	C-1+ In-1-+ +h	Calaat Outlat	D
PED (CE), ASME (UV) & CRN	Select bore size from above table	Select inlet size from above table	Select Inlet thread type	Select Outlet thread type	Perfluroelastomer (FFKM)

EAC marking available upon request





^{*}Please send your selected details to Seetru and we can provide the full ordering code, price and lead-time.

Capacity Table - In accordance with ISO 4126, Air at 0°C at 1.013 bar - Kg/min Type 319-Inline valve: Flow rates at 10% above the set pressure



Set Pressure		Bore Size (D0)				
		9.5mm	13.08mm			
bar	psi	Kg/min	Kg/Min			
13.5	195.75	7.9				
14	203	8.2				
16	232	9.3				
16.2	234.9	9.5	18.7			
18	261	10.4				
20	290	11.5				
24	348	13.7				
25.9	375.55	14.8	29.3			
26	377	14.9				
26.8	388.6	15.4	30.2			
28	406	15.9				
30	435	17.1				
35	507.5	19.9				
40	580	22.7				
45	652.5	25.5				
50	725	28.2				

For any intermediate pressures/flows please contact Seetru

Capacity Table - In accordance with ASME BPVC.XIII, AIR at 60°F and 14.7 psia/scfm. SCFM Type 319-Inline Valve: Flow rates at 10% above the set pressure



Set Pressure		Bore Size (D0)				
		9.5mm	13.08mm			
psi	bar	SCFM	SCFM			
195.75	13.50	239.2				
200	13.79	244.0				
235	16.20	284.0	609.0			
250	17.24	301.2				
300	20.69	358.5				
325	22.41	387.0				
350	24.14	415.5				
375.6	25.90	444.9	954.0			
388.6	26.80	459.9	987.0			
400	27.59	472.9				
450	31.03	530.0				
500	34.48	587.0				
550	37.93	644.5				
600	41.38	702.0				
650	44.83	759.0				
700	48.28	816.0				
725	50.00	845.0				



for refrigeration

Seetru Limited

Type 636 / 631

Safety valves with bronze body < Enclosed discharge valve with threaded connections <

Example Applications

- Compressor manufacture
- Industrial refrigeration
- Commercial refrigeration
- Ice making machinery
- Air conditioning

Specifications

- Inlet connections: 3/8" to 1 1/2" (depending on bore size)
- Temperature:-30°C to +200°C
- Pressure range: 6.6 to 55.2 bar (depending on bore size)

Materials of Construction

Component	Material	Grade
Inlet	Brass	CW614N
Body	Bronze	CC491K SB-62 C83600
Internal Parts	Brass	CW614N
Spring	Stainless Steel	1.4310 (302)



Approvals

- Designed in accordance with BS EN ISO-4126-1 &-7
- PED 2014/68/EU (CE)
- PE(S)R UK SI 2016 No. 1105 (UKCA)
- ASME BPVC VIII.1 & XIII (UV)
- CRN
- EAC



Seal Materials

Seal Material	Temperature Range
Perfluroelastomer (FFKM)	-30°C to +200°C


Standard seal materials shown, others are available.

Valve cap / Top Fitting

Standard option – Sealed Cap (gas tight cap)



• Other option – Sealed lever (gas tight)





	_

Bore size		9.5		13.7mm		17mm			
Inlet Size	3/8"	1/2"	3/4"	1/2"	3/4"	1"	1"	1 1/4"	1 1/2"
Outlet Size		3/4"			1"			1 1/2"	
Flow Area	70.9mm²		147.7mm²		227mm²				
H - Height (Rota-lift cap version)	99mm (up to 33 bar) 113mm (33-55.2 bar)		135mm (up to 33 bar) 168mm (33-49 bar)		204mm				
TÜV alloted outflow coefficient	0.78		0.71		0.84				
NB Certified rated slope (ASME)	1.74 scfm/psia		3.47 scfm/psia		5.60 scfm/psia				
Weight (approximate) Kg	0.8		1.1		3.6				
Set Pressure range - PED (CE) bar	7.0 to 55.2		7.0 to 49.0		6.6 to 35.0				
Set Pressure range - ASME (UV) psi	101.5 to 800.4		101.5 to 710.5		95.7 to 507.5		5		
Relieving pressure/fully open pressure				Set pressure +10%					
Reseating pressure				Set	: pressure -1	0%			

Maximum permissible built up back pressure = 10% of set pressure at or below which flow is not reduced. Stable operation on flows down to 50% of valve rated capacity.


Standard INLET Thread Connection Types



- BSP Parallel male thread
- BSP Taper male thread
- NPT male thread


Standard OUTLET Thread Connection Types





Valves with Rota-lift Easing Gear







Approval Required	Valve type	Select Bore	Inlet Size	Inlet Thread Type	Outlet Threa Type	Easing Gear	Seal Material
PED (CE)	636	C-l+ b:	C-1+:1-+-:	C - + - - + +	Calaat Outlat	C C :- +	D
PED (CE), ASME (UV) & CRN	631	Select bore size from above table	Select inlet size from above table	Select Inlet thread type	Select Outlet thread type	Sealed Cap is the standard option.	Perfluroelastomer (FFKM)

EAC marking available upon request



Example	CE/PED, ASME/UV & CRN	631	9.5	3/4"	NPT	NPT	Sealed Cap	FFKM	16.2 bar
Selection	Approval	Valve Type	Bore = 9.5mm	Inlet Size	Inlet Thread Type	Outlet Thread Type	Easing Gear	Seal	Set Pressure



^{*}Please send your selected details to Seetru and we can provide the full ordering code, price and lead-time.

Capacity Table - In accordance with TÜV, AIR at 0°C and 1013mbar. Normal m³/hour Type 636: Flow rates at 10% above the set pressure



Set Pressure		Bore Size (D0)					
		9.5mm	13.7mm	17mm			
bar	psi	Nm³/Hour	Nm³/Hour	Nm³/Hour			
7	101.5	328.1	621.2	1131.6			
8	116	369.5	699.6	1274.5			
9	130.5	410.9	778.0	1417.3			
10	145	452.4	856.4	1560.2			
15	217.5	659.5	1248.5	2274.5			
_20	290	866.6	1640.6	2988.7			
25	362.5	1073.8	2032.7	3703.0			
30	435	1280.9	2424.8	4417.3			
35	507.5	1488.1	2816.9	5131.6			
40	580	1695.2	3209.0				
45	652.5	1902.3	3601.1				
49	710.5	2068.0	3914.8				
50	725	2109.4					
55.2	800.4	2324.8					

For any intermediate pressures/flows please contact Seetru

Capacity Table - In accordance with ASME BPVC.XIII, AIR at 60°F and 14.7 psia/scfm. SCFM Type 631: Flow rates at 10% above the set pressure

Sat Draceura	<u> </u>	Bore Size (D0)				
Set Pressure		9.5mm	13.7mm	17mm		
psi	bar	SCFM	SCFM	SCFM		
100	6.90	213.2	432.6	698.1		
150	10.34	307.2	623.4	1006.1		
200	13.79	401.2	814.2	1314.0		
250	17.24	495.3	1005.0	1621.9		
300	20.69	589.3	1195.8	1929.8		
350	24.14	683.3	1386.6	2237.8		
400	27.59	777.4	1577.4	2545.7		
435	30.00	843.2	1711.0	2761.2		
450	31.03	871.4	1768.2	2853.6		
500	34.48	965.4	1959.0	3161.5		
507.5	35.00	979.5	1987.6	3207.7		
550	37.93	1059.4	2149.8			
600	41.38	1153.4	2340.6			
650	44.83	1247.5	2531.4			
700	48.28	1341.5	2722.2			
710.5	49.00	1361.3	2762.3			
750	51.72	1435.5				
800.4	55.20	1530.3				



for refrigeration

Seetru Limited

Type 646 / 641

Safety valves with stainless steel body < Enclosed discharge valve with threaded connections <

Example Applications

- Compressor manufacture
- Industrial refrigeration
- Commercial refrigeration
- Ice making machinery
- Air conditioning

Specifications

- Inlet connections: 3/8" to 1 1/2" (depending on bore size)
- Temperature:-30°C to +200°C
- Pressure range: 6.6 to 55.2 bar (depending on bore size)

Materials of Construction

Component	Material	Grade
Inlet	Stainless Steel	1.4401 (316)
Body	Stainless Steel	1.4408 (316)
Internal Parts	Stainless Steel	1.4401 (316)
Spring	Stainless Steel	1.4310 (302)



Approvals

- Designed in accordance with BS EN ISO-4126-1 &-7
- PED 2014/68/EU (CE)
- PE(S)R UK SI 2016 No. 1105 (UKCA)
- ASME BPVC VIII.1 & XIII (UV)
- CRN
- EAC



Seal Materials

Seal Material	Temperature Range
Perfluroelastomer (FFKM)	-30°C to +200°C


Standard seal materials shown, others are available.

Valve cap / Top Fitting

• **Standard option** – Sealed Cap (gas tight cap)



• Other option – Sealed lever (gas tight)





K	
	V

Bore size		9.5			13.7mm			17mm		
Inlet Size	3/8"	1/2"	3/4"	1/2"	3/4"	1"	1"	1" 1/4"		
Outlet Size		3/4"			1"			1 1/2"		
Flow Area		70.9mm²			147.7mm²		227mm²			
H - Height (Sealed cap version)		ım (up to 33 mm (33-55.2	,		nm (up to 33 8mm (33-49		204mm			
TÜV alloted outflow coefficient		0.78		0.71						
NB Certified rated slope (ASME)	1	74 scfm/ps	ia	3	3.47 scfm/psi	a	5	5.60 scfm/psia		
Weight (approximate) Kg		0.8			1.1			3.6		
Set Pressure range - PED (CE) bar		7.0 to 55.2			7.0 to 49.0			6.6 to 35.0		
Set Pressure range - ASME (UV) psi	101.5 to 800.4			1	.01.5 to 710.	5	95.7 to 507.5			
Relieving pressure/fully open pressure	Set pressure +10%									
Reseating pressure		Set pressure -10%								

Maximum permissible built up back pressure = 10% of set pressure at or below which flow is not reduced. Stable operation on flows down to 50% of valve rated capacity.

Standard INLET Thread Connection Types




- BSP Parallel male thread
- BSP Taper male thread
- NPT male thread

Standard OUTLET Thread Connection Types


- BSP Parallel female thread
- NPT female thread

Valves with Rota-lift Easing Gear





Valve Selection Guide



EAC marking available upon request

(UV) & CRN

Example of Valve Selection Process

641



Example	CE/PED, ASME/UV & CRN	641	9.5		NPT		Sealed Cap	FFKM	16.2 bar
Selection	Approval	Valve Type	Bore = 9.5mm	Inlet Size	Inlet Thread Type	Outlet Thread Type	Easing Gear	Seal	Set Pressure



^{*}Please send your selected details to Seetru and we can provide the full ordering code, price and lead-time.

Capacity Table - In accordance with TÜV, AIR at 0°C and 1013mbar. Normal m³/hour Type 646: Flow rates at 10% above the set pressure



Set Pressure		Bore Size (D0)			
Set Flessule		9.5mm	13.7mm	17mm	
bar	psi	Nm³/Hour	Nm³/Hour	Nm³/Hour	
7	101.5	328.1	621.2	1131.6	
8	116	369.5	699.6	1274.5	
9	130.5	410.9	778.0	1417.3	
10	145	452.4	856.4	1560.2	
15	217.5	659.5	1248.5	2274.5	
20	290	866.6	1640.6	2988.7	
25	362.5	1073.8	2032.7	3703.0	
30	435	1280.9	2424.8	4417.3	
35	507.5	1488.1	2816.9	5131.6	
40	580	1695.2	3209.0		
45	652.5	1902.3	3601.1		
49	710.5	2068.0	3914.8		
50	725	2109.4			
55.2	800.4	2324.8			

For any intermediate pressures/flows please contact Seetru

Capacity Table - In accordance with ASME BPVC.XIII, AIR at 60°F and 14.7 psia/scfm. SCFM Type 641: Flow rates at 10% above the set pressure

Set Pressure	<u> </u>	Bore Size (D0)			
Set Pressure		9.5mm	13.7mm	17mm	
psi	bar	SCFM	SCFM	SCFM	
100	6.90	213.2	432.6	698.1	
150	10.34	307.2	623.4	1006.1	
200	13.79	401.2	814.2	1314.0	
250	17.24	495.3	1005.0	1621.9	
300	20.69	589.3	1195.8	1929.8	
350	24.14	683.3	1386.6	2237.8	
400	27.59	777.4	1577.4	2545.7	
435	30.00	843.2	1711.0	2761.2	
450	31.03	871.4	1768.2	2853.6	
500	34.48	965.4	1959.0	3161.5	
507.5	35.00	979.5	1987.6	3207.7	
550	37.93	1059.4	2149.8		
600	41.38	1153.4	2340.6		
650	44.83	1247.5	2531.4		
700	48.28	1341.5	2722.2		
710.5	49.00	1361.3	2762.3		
750	51.72	1435.5			
800.4	55.20	1530.3			



for liquid



Type 670 / 690

Safety valves with bronze body < Enclosed discharge valve with threaded connections <

Example Applications

- Pumping systems and Hydraulic systems
- Thermal relief
- Waste water management
- Oil transfer
- Petrochemical industries
- Fire fighting equipment
- Water cooling and feeding systems

Specifications

- Inlet connections: 3/8" to 2" (depending on bore size)
- Temperature:-40°C to +200°C (depending on seal material)
- Pressure range: 0.7 to 30 bar (depending on bore size)

Materials of Construction

Component	Material	Grade
Inlet	Type 670 = Brass	CW614N
	Type 690 = Stainless Steel	1.4401 (316)
Body	Bronze	CC491K SB-62 C83600
Internal Parts	Type 670 = Brass	CW614N
	Type 690 = Stainless Steel	1.4401 (316)
Spring	Stainless Steel	1.4310 (302)

Approvals

- Designed in accordance with BS EN ISO-4126-1 &-7
- PED 2014/68/EU (CE)
- PE(S)R UK SI 2016 No. 1105 (UKCA)
- EAC

CE EN EN

Seal Materials

Seal Material	Temperature Range
Viton® (FKM)	-15°C to +200°C
Nitrile (NBR)	-40°C to +120°C


Standard seal materials shown, others available on request

Easing Gear / Lifting Gear Options

Standard Option: Sealed Cap (gas tight cap)



Other Option: Sealed lever (gas tight)



RETURN TO CONTENTS PAGE



Bore size	9.5	mm (670	10)	13.7	7mm (67	013)	17	mm (670	18)	20	mm (670	20)	25:	mm (670	25)
Inlet Size	3/8"	1/2"	3/4"	1/2"	3/4"	1"	1"	1 1/4"	1 1/2"	1"	1 1/4"	1 1/2"	1 1/4"	1 1/2"	2"
Outlet Size		3/4"			1"			1 1/2"			2"		2"		
Flow Area		70.9mm²		í	147.7mm ² 227mm ² 314mm ²		2		m² 490.		190.4mm	2			
H - Height (Sealed cap version)		53.5 mm			52 mm			n (up to : nm (21-4			95mm			119 mm	
Derated coefficient of discharge Kdr		0.59			0.57			0.55			0.57			0.56	
Weight (approximate) Kg		0.8			1.1			3.6			4.0			5.1	
Set Pressure range - PED (CE) bar	0	.76 to 30	.0	().7 to 27.	0	!	5.4 to 25	.7	3	3.3 to 22.	3.3 to 22.0		5.65 to 21.	
Relieving pressure/fully open pressure					Set pressure +25%					ıre +25%					
Reseating pressure		Set pressure -20% down to 3 bar													

1 TÜV alloted outflow coefficients for pressures above 3.0 bar, for lower pressures please see the flow rate tables or contact Seetru.


Standard INLET Thread Connection Types

- BSP Parallel male thread
- BSP Taper male thread
- NPT male thread

Standard OUTLET Thread Connection Types

- BSP Parallel female thread
- NPT female thread


Valve Drawing

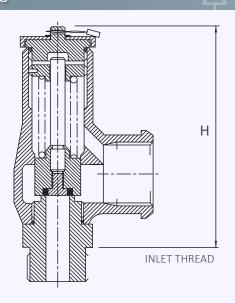

Valve Selection Guide

Approval Required	Valve type	Select Bore	Inlet Size	Inlet Thread Type	Outlet Thread Type	Easing Gear	Seal Material
	670 (Brass inlet)	Select bore	Select inlet			Select easing	Viton® (FKM)
PED (CE)	690	size from above table	size from above table	Select Inlet thread type	Select Outlet thread type	gear/top fitting	Nitrile (NBR)
	(St. Steel inlet)						Other

EAC marking available upon request





^{*}Please send your selected details to Seetru and we can provide the full ordering code, price and lead-time.

Capacity Table - In accordance with ISO 4126, Water at 15°C - kg/hour Type 670/690



Cat Duana	⊼	Bore Size (D0)				
Set Pressure		9.5mm	13.7mm	17mm	20mm	25mm
bar	psi	kg/hour	kg/hour	kg/hour	kg/hour	kg/hour
0.7	10.15		4001			
0.76	11.02	2075	4169			
1	14.5	2380	4782			
2	29	3367	6759			
3	43.5	4123	8284			
4	58	4761	9560		20384	
5	72.5	5323	10694		22792	
6	87	5831	11708	17394	24966	38289
7	101.5	6298	12654	18791	26968	39920
8	116	6733	13519	20089	28828	42676
9	130.5	7141	14348	21307	30579	45265
10	145	7528	15116	22460	32231	49431
15	217.5	9219	18523	27521	39477	58437
20	290	10650	21376	31763	45583	69906
22	319	11170	22419	33314	47807	
25	362.5	11902	23914			
27	391.5	12369	24837			
30	435	13040				



Seetru Limited

for liquid

Type 680


Safety valves with stainless steel body < Enclosed discharge valve with threaded connections <

Example Applications



- Pumping systems and Hydraulic systems
- Thermal relief
- Waste water management
- Oil transfer
- Petrochemical industries
- Fire fighting equipment
- Water cooling and feeding systems


Specifications



• Temperature:-40°C to +200°C (depending on seal material)

Pressure range: 0.7 to 30 bar (depending on bore size)

Materials of Construction

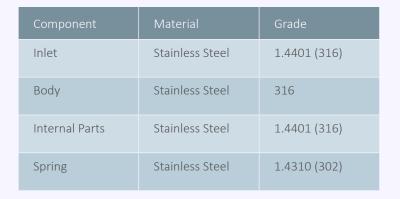



Approvals

- Designed in accordance with BS EN ISO-4126-1 &-7
- PED 2014/68/EU (CE)
- PE(S)R UK SI 2016 No. 1105 (UKCA)
- EAC



Seal Materials



Seal Material	Temperature Range
Viton® (FKM)	-15°C to +200°C
Nitrile (NBR)	-40°C to +120°C


Standard seal materials shown, others available on request

Easing Gear / Lifting Gear Options

Standard Option: Sealed Cap (gas tight cap)



Other Option: Sealed lever (gas tight)



RETURN TO CONTENTS PAGE



Bore size	9.5	mm (680)10)	13.7	mm (68	013)	17	mm (680	18)	20mm (68020))20)	25mm (68025		25)
Inlet Size	3/8"	1/2"	3/4"	1/2"	3/4"	1"	1"	1 1/4"	1 1/2"	1"	1 1/4"	1 1/2"	1 1/4"	1 1/2"	2"
Outlet Size		3/4"			1"			1 1/2"			2"		2"		
Flow Area		70.9mm	2	1	.47.7mm	2		227mm²			314mm ²	2	490.4mm²		2
H - Height (Sealed cap version)		99mm			138mm			204mm			215		241		
Derated coefficient of discharge, Kdr		0.59			0.57			0.55			0.57			0.56	
Weight (approximate) Kg		0.8			1.1			3.6			4.0			5.1	
Set Pressure range - PED (CE) bar	0.	76 to 30	.0	0	.7 to 27.	0	Į.	5.4 to 25.	7	3	3.3 to 22.	.0 5.65 to 21.0		.0	
Relieving pressure/fully open pressure		Set pressure +25%													
Reseating pressure	Set pressure -20% down to 3 bar														

1 TÜV alloted outflow coefficients for pressures above 3.0 bar, for lower pressures please see the flow rate tables or contact Seetru.


Standard INLET Thread Connection Types

- BSP Parallel male thread
- BSP Taper male thread
- NPT male thread

Standard OUTLET Thread Connection Types

- BSP Parallel female thread
- NPT female thread


Valve Drawing

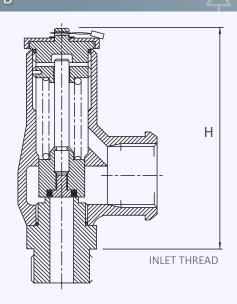

Valve Selection Guide

Approval Required	Valve type	Select Bore	Inlet Size	Inlet Thread Type	Outlet Thread Type	Easing Gear	Seal Material
		Select bore	Select inlet			Select easing	Viton® (FKM)
PED (CE)	680	size from above table	size from above table	Select Inlet thread type	Select Outlet thread type	gear/top fitting	Nitrile (NBR)
							Other

EAC marking available upon request





^{*}Please send your selected details to Seetru and we can provide the full ordering code, price and lead-time.

Capacity Table - In accordance with ISO 4126, Water at 15°C - kg/hour Type 680



Set Pressure		Bore Size (D0)						
		9.5mm	13.7mm	17mm	20mm	25mm		
bar	psi	kg/hour	kg/hour	kg/hour	kg/hour	kg/hour		
0.7	10.15		4001					
0.76	11.02	2075	4169					
1	14.5	2380	4782					
2	29	3367	6759					
3	43.5	4123	8284					
4	58	4761	9560		20384			
5	72.5	5323	10694		22792			
6	87	5831	11708	17394	24966	38289		
7	101.5	6298	12654	18791	26968	39920		
8	116	6733	13519	20089	28828	42676		
9	130.5	7141	14348	21307	30579	45265		
10	145	7528	15116	22460	32231	49431		
15	217.5	9219	18523	27521	39477	58437		
20	290	10650	21376	31763	45583	69906		
22	319	11170	22419	33314	47807			
25	362.5	11902	23914					
27	391.5	12369	24837					
30	435	13040						



for liquid

Seetru Limited

Type 970 Threaded

Safety valves made with brass Inlets < Enclosed discharge valve with threaded connections < Metal to metal sealing <

Example Applications

- Pumping systems and Hydraulic systems
- Thermal relief
- Waste water management
- Oil transfer
- Petrochemical industries
- Fire fighting equipment
- Water cooling and feeding systems
- Chemical process

Specifications

- Inlet connections: 1/2" to 2" threaded connections
 (depending on valve bore size) (for flanged connections see 980 Flanged datasheet)
- Temperature range:-50°C to +250°C (depending on body o'ring material)
- Pressure range: 0.3 to 36.0 bar (depending on valve bore size)



Approvals

- Designed in accordance with BS EN ISO-4126-1 &-7
- PED 2014/68/EU (CE)
- PE(S)R UK SI 2016 No. 1105 (UKCA)
- FΔ(
- Leak tightness at 90% set pressure to API 527 and in accordance with EN ISO 4126-1



Materials of Construction

Component	Material	Grade
Inlet	Brass	CZ132 / CW602N
Outlet Body (10mm bore valve)	Bronze	SB-62 C8360
Outlet Body (15, 20 & 25mm bore valves)	Stainless Steel	1.4408 (316)
Spring	Stainless Steel	1.4310 (302)
Disc	Stainless Steel	1.4401 (316)

Seal Materials

This valve using metal to metal sealing. There is a choice of o'ring used for the sealed cap/lever

O'ring material	Temperature Range
Viton® (FKM)	-20°C to +250°C
Nitrile (NBR)	-30°C to +150°C
Silicone	-50°C to +250°C
EPDM	-40°C to +150°C

Standard seal materials shown, others are available.

Easing Gear / Lifting Gear / Top Fitting Options


Sealed Cap (gas tight cap)



Sealed lever (gas tight lever)



• Unsealed lever (not gas tight)





Bore size	10mm (97010)		15mm (97015)		20mm (97020)		25mm (97025)						
Inlet Size	1/2"	3/4"	1"	1"	1 1/4"	1 1/2"	1"	1 1/4"	1 1/2"	1"	1 1/4"	1 1/2"	2"
Outlet Size		1"			1 1/2"		2"		2"				
Flow Area	78.5mm²		177mm²		314mm²			491mm²					
H - Height (Sealed Cap Version)	114mm		168mm		141mm		225mm						
Derated coefficient discharge of water below 100°C - Kdr		0.48		0.54		0.503		0.507					
Weight (approximate) Kg		1.0		2.1		3.5			4.2				
Set Pressure range - PED (CE) bar	0.3 to 28.0		0.3 to 33.0		0.6 to 36.0		0.48 to 23.5						
Relieving pressure/fully open pressure	Set pressure +10%												
Reseating pressure	Set pressure -20% (0.6 bar below 3.0 bar)												

• Leak tightness at 90% set pressure to API 527 and in accordance with EN ISO 4126-1


Standard INLET Connection Types

- BSP parallel male thread
- BSP taper male thread
- NPT male thread
- BSP parallel female thread (limited option)

Standard OUTLET Connection Types

BSP parallel female thread


Valve Drawing

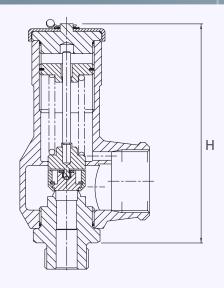

Valve Selection Guide

Valve type	Select Bore	Inlet Size	Inlet Thread Type	Top Fitting	O'ring material (for cap)	Set pressure
970	Select bore size from above table	Select inlet size from above table	Select Inlet Thread type	Select easing gear/top fitting	See table	Set pressure from available range

EAC marking available upon request





^{*}Please send your selected details to Seetru and we can provide the full ordering code, price and lead-time.

Capacity Table - In accordance with EN ISO 4126-1 Water below 100°C at 10% accumulation - litres/min



	Set Pressure		Bore Size (D0)					
Set Pressure			15mm	20mm	25mm			
bar	psi	Litres/min of Water	Litres/min of Water	Litres/min of Water	Litres/min of Water			
3	43.5	58	147	243	383			
4	58	67	169	281	443			
5	72.5	74	189	314	495			
6	87.00	82	207	344	542			
7	101.5	89	224	372	585			
8	116	95	240	397	626			
9	130.5	100	254	422	664			
10	145	106	268	444	700			
15	217.5	130	328	544	857			
20	290	150	379	628	990			
25	362.5	167	424	703				
28	406	177	449	744				
30	435		465	770				
33	478.5		487	807				
35	507.5			831				
36	522			843				



for liquid

Seetru Limited

Type 980 Threaded

Safety valves made from Stainless Steel < Enclosed discharge valve with threaded connections < Metal to metal sealing <

Example Applications

- Pumping systems and Hydraulic systems
- Thermal relief
- Waste water management
- Oil transfer
- Petrochemical industries
- Fire fighting equipment
- Water cooling and feeding systems
- Chemical process

Specifications

- Inlet connections: 1/2" to 2" threaded connections (depending on valve bore size)
 - *For flanged connections see datasheet 980 Flanged
- Temperature range:-50°C to +250°C (depending on body o'ring material)
- Pressure range: 0.3 to 36.0 bar (depending on valve bore size)



Approvals

- Designed in accordance with BS EN ISO-4126-1 &-7
- PED 2014/68/EU (CE)
- PE(S)R UK SI 2016 No. 1105 (UKCA)
- FAC
- Leak tightness at 90% set pressure to API 527 and in accordance with EN ISO 4126-1



Materials of Construction

Component	Material	Grade
Inlet	Stainless Steel	1.4401 (316)
Body	Stainless Steel	1.4408 (316)
Internal Parts	Stainless Steel	1.4401 (316)
Spring	Stainless Steel	1.4310 (302)
Disc	Stainless Steel	AISI 440B

Seal Materials

o'ring used for the sealed cap/lever.

O'ring material – Top cap

Temperature Range

Viton® (FKM)

-20°C to +250°C

 Viton® (FKM)
 -20°C to +250°C

 Nitrile (NBR)
 -30°C to +150°C

 Silicone
 -50°C to +250°C

 EPDM
 -40°C to +150°C


Standard seal materials shown, others are available.

Easing Gear / Lifting Gear / Top Fitting Options

Sealed Cap (gas tight cap)




Sealed lever (gas tight)







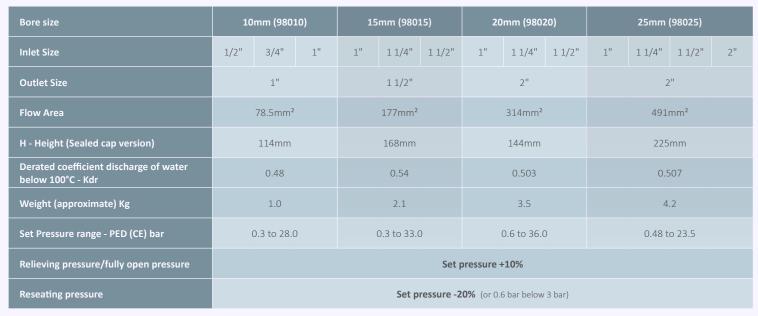

Leak tightness at 90% set pressure to API 527 and in accordance with EN ISO 4126-1.


Standard INLET Connection Types

- BSP parallel male thread
- BSP taper male thread
- NPT male thread
- BSP parallel female thread (limited option)

Standard OUTLET Connection Types

• BSP parallel female thread

Valve Drawing

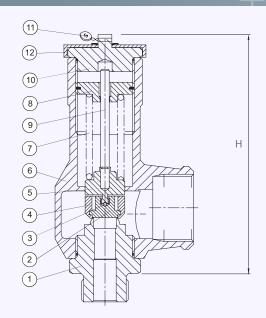

Valve Selection Guide

Valve type	Select Bore	Inlet Size	Inlet Thread Type	Top Fitting	O'ring material (for cap)	Set pressure
980	Select bore size from above table	Select inlet size from above table	Select Inlet Thread type	Select easing gear/top fitting	See table	Set pressure from available range

EAC marking available upon request

*Please send your selected details to Seetru and we can provide the full ordering code, price and lead-time.

Example	980	15	1"	BSP parallel	Sealed Lever	Viton	17.5 bar
Selection	Valve Type	Bore = 15mm	Inlet Size	Inlet Thread Type	Top Fitting	O'ring	Set Pressure



Type 980 Capacity Table - In accordance with EN ISO 4126-1 Water below 100°C at 10% accumulation - litres/min



Set Pressure		Bore Size (D0)					
		10mm	15mm	20mm	25mm		
bar	psi	Litres/min of Water	Litres/min of Water	Litres/min of Water	Litres/min of Water		
3	43.5	58	147	243	383		
4	58	67	169	281	443		
5	72.5	74	189	314	495		
6	87.00	82	207	344	542		
7	101.5	89	224	372	585		
8	116	95	240	397	626		
9	130.5	100	254	422	664		
10	145	106	268	444	700		
15	217.5	130	328	544	857		
20	290	150	379	628	990		
25	362.5	167	424	703			
28	406	177	449	744			
30	435		465	770			
33	478.5		487	807			
35	507.5			831			
36	522			843			



Seetru Limited

for liquid

Type 980 Flanged

Safety valves made from Stainless Steel <
Enclosed discharge valve with flanged connections <
Metal to metal sealing <

Example Applications



- Pressure vessels
- Thermal relief
- Water tanks
- Liquid storage
- Oi
- Chemical process

Specifications



- Inlet connections: DN15 (1/2), DN20 (3/4") or DN25 (1")
 flange DIN EN1092 and ANSI flanges are available
- Temperature range:-50°C to +250°C (depending on body o'ring material)
- Pressure range: 0.3 to 33.0 bar (depending on bore size)



Approvals



- Designed in accordance with BS EN ISO-4126-1 &-7
- PED 2014/68/EU (CE)
- PE(S)R UK SI 2016 No. 1105 (UKCA)
- ΕΔΩ
- Leak tightness at 90% set pressure to API 527 and in accordance with EN ISO 4126-1

CE ER FIII

Materials of Construction



Component	Material	Grade
Inlet & Outlet Flanges	Stainless Steel	1.4401 (316)
Body	Stainless Steel	1.4408 (316)
Internal Parts	Stainless Steel	1.4401 (316)
Spring	Stainless Steel	1.4310 (302)
Disc	Stainless Steel	AISI 440B

Seal Materials




o'ring used for the sealed cap/lever.

O'ring material – Top cap	Temperature Range
Viton® (FKM)	-20°C to +250°C
Nitrile (NBR)	-30°C to +150°C
Silicone	-50°C to +250°C
EPDM	-40°C to +150°C


Standard seal materials shown, others are available.

Easing Gear / Lifting Gear / Top Fitting Options





Sealed lever (gas tight)







Bore size	10	mm (980:	10)	15mm (98015)
Inlet Size	DN15 DN20 DN25 (1/2") (3/4") (1")		DN25 (1")	
Outlet Size		DN25 (1") DN40 (1 1		DN40 (1 1/2")
Flow Area	78.5mm²		177mm²	
H - Height (Sealed Lever version)	200mm		253mm	
Derated coefficient discharge of water below 100°C - Kdr	0.48		0.54	
Weight (approximate) Kg	3.0		5.3	
Set Pressure range - PED (CE) bar	0.3 to 28.0		0.3 to 33.0	
Relieving pressure/fully open pressure	Set pressure +10%			+10%
Reseating pressure	Set p	ressure -2	0% (or 0.	6 bar below 3 bar)

• Leak tightness at 90% set pressure to API 527 and in accordance with EN ISO 4126-1.


Standard INLET Connection Types

- DIN EN1092 Flange PN16, PN25 or PN40
- ASME Flange CL150, CL300 or CL600


Standard OUTLET Connection Types

- DIN EN1092 Flange PN16, PN25 or PN40
- ASME Flange CL150 or CL300

Valve Drawing

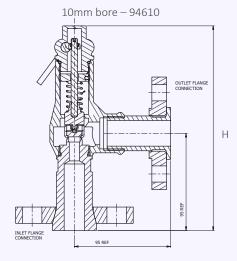

15mm bore - 94615

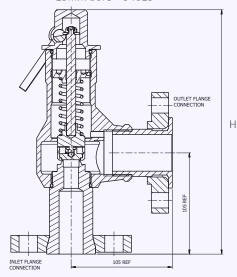

Valve Selection Guide

Valve type	Select Bore	Inlet Size	Inlet Flange Type	Outlet Flange Type	Easing Gear	O'ring material (for cap)
980	Select bore size from above table	Select inlet size from above table	Select Inlet Flange type	Select Outlet Flange type	Select easing gear/top fitting	See table

EAC marking available upon request

Example	980	15	DN25	DIN EN1092 Flange PN16	DIN EN1092 Flange PN16	Sealed Lever	Viton	10.5 bar
Selection Selection	Valve Type	Bore = 10mm	Inlet Size	Inlet Flange Type	Outlet Flange Type	Top Fitting	O'ring	Set Pressure



^{*}Please send your selected details to Seetru and we can provide the full ordering code, price and lead-time.

Type 980 Capacity Table - In accordance with EN ISO 4126-1 Water below 100°C at 10% accumulation - litres/min



	<u> </u>	Bore Size (D0)				
Set Pressure		10mm	15mm			
bar	psi	Litres/min of Water	Litres/min of Water			
3	43.5	58	147			
4	58	67	169			
5	72.5	74	189			
6	87.00	82	207			
7	101.5	89	224			
8	116	95	240			
9	130.5	100	254			
10	145	106	268			
15	217.5	130	328			
20	290	150	379			
25	362.5	167	424			
28	406	177	449			
30	435		465			
33	478.5		487			



for Liquid

hygienic

Type 6L0

Clean Service/Hygienic Safety valves with Stainless Steel body < Enclosed discharge valve with Tri-Clamp inlet connections <

Safety valve for food industry & other hygienic applications

Example Applications

- Liquid storage
- Food production plants
- Hygienic applications
- Pressure vessels

Specifications

- Inlet connections: 1/2" to 1" Tri-Clamp (depending on bore size)
- Temperature: -15°C to +200°C (depending on seal material)
- Pressure range: 0.7 to 30.0 bar (depending on bore size)




Approvals

- Designed in accordance with BS EN ISO-4126-1 &-7
- PED 2014/68/EU (CE)
- PE(S)R UK SI 2016 No. 1105 (UKCA)
- EAC

C€ EK EH

Seetru Limited

Materials of Construction

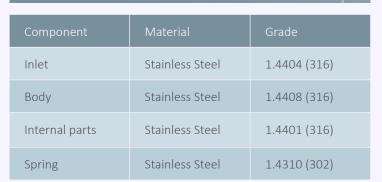

SURFACE FINISH

Process Contact Surface

In accordance with ASME BPE-2005 Table SF-5. Surface designation Ra Max 15 μinches, 0.4 μm, Electropolished.

Other Surfaces

Not greater than 60 μ inches, 1.5 μ m.

Seal Materials

Seal Material	Temperature Range
Perfluoroelastomer (FFKM)	-15°C to +200°C

Standard seal materials shown, others are available.
Elastomer soft sealing specifically developed for food & pharmaceutical industries.

Compliant to:

- 1. FDA 21 CFR 177.2600
- 2. United States Pharmacopoeia (USP) Class VI
- ${\it 3. SP3A Sanitary Standards for Multiple Use Rubber Dairy Equipment No 18-03.}\\$

Easing Gear / Lifting Gear Options

Standard option:



Sealed Cap (gas tight cap)

• Other Options:



Sealed lever (gas tight)



RETURN TO CONTENTS PAGE

Bore size	9.5mm	(6L010)	13.7mm	ı (6L013)	
Inlet Size	1/2"	3/4"	3/4"	1"	
Outlet Size	3/	' 4"	1	"	
Flow Area	70.9	mm²	147.7mm²		
H - Height (Sealed cap version)	120	mm	165mm		
TÜV alloted outflow coefficient	0.	59	0.57		
Weight (approximate) Kg	0.9		1.3		
Set Pressure range - PED (CE) bar	0.76 to 30.0		0.7 to 27.0		
Relieving pressure/fully open pressure	Set pressure +25%				
Reseating pressure	Set pressu	re max -20% down t	o 3 bar (Below 3 ba	r = 0.6 bar)	

Stable operation on flows down to 50% of valve rated capacity.


Standard Thread Connection Types

 Tri-Clamp® compatable generally in accordance with ASME BPE 2005 & BS 4825-3.

Standard Outlet Connection Types

BSP Female Pipe threads (G)

Valve drawing

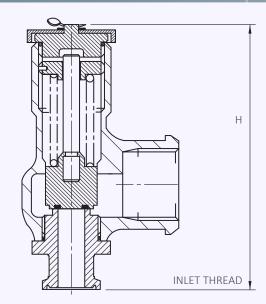

Valve Selection Guide

Approval Required	Valve type	Select Bore	Inlet Size	Easing Gear	Seal Material
PED (CE)	6L0	Select bore size	Select inlet size	Select easing gear/top fitting	Perfluroelastomer (FFKM)
		from above table	from above table		Other

EAC marking available upon request

Example	PED (CE)	6L0	9.5mm	1/2"	Sealed Cap	Perfluroelastomer (FFKM)	3.5 bar
Selection	Approval	Valve Type	Bore Size	Inlet Size	Easing Gear	Seal	Set Pressure



^{*}Please send your selected details to Seetru and we can provide the full ordering code, price and lead-time.

Capacity Table - In accordance with ISO 4126, Water at 15°C - kg/hour Type 6L0



Sot Proceuro		Bore Size (D0)			
Set Pressure		9.5mm (6L010)	13.7mm (6L013)		
bar psi		kg/hour	kg/hour		
0.7 10.15			4001		
0.76 11.02		2075	4169		
1 14.5		2380	4782		
2 29		3367	6759		
3 43.5		4123	8284		
4 58		4761	9560		
5 72.5		5323	10694		
6 87		5831	11708		
7 101.5		6298	12654		
8 116		6733	13519		
9 130.5		7141	14348		
10 145		7528	15116		
15 217.5		9219	18523		
20 290		10650	21376		
22 319		11170	22419		
25 362.5		11902	23914		
27 391.5		12369	24837		
30 435		13040			



Change-Over Valves

for compressed air or gases

cryogenic & liquefied gas

refrigeratio


hydrogen

COV10 / COV13 / COV30


Solutions for plant and process efficiency

Change-over valves (sometimes referred to as selector valves or three-way valves) enables the switching of flow from one safety valve to another. Typically used where plant shutdown is impossible or undesirable for process, engineering or commercial reasons. With change-over valves it is possible to switch over between parallel safety valves without interrupting operation, so that maintenance work can be carried out on each safety valve in turn. Seetru change-over valves in combination with our safety valves provide the best solution for plant safety and efficiency. Seetru products are widely recognised for their exceptional quality and reliability.

Features

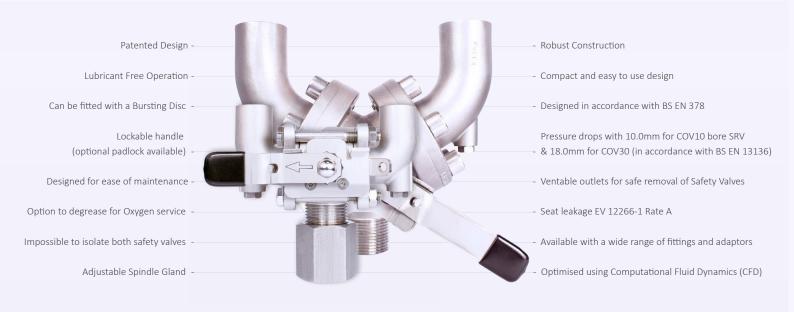

Fluid Mahcanics

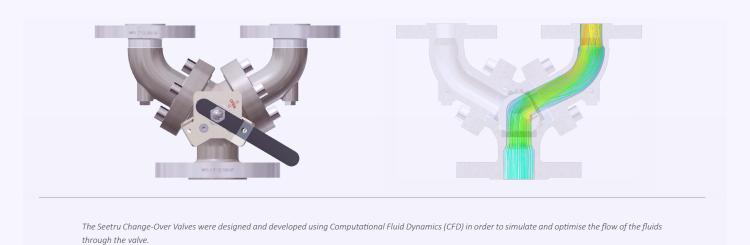



Specifications: COV10

System Connections	½" to 1" BSP, BSPT & NPT	
Valve Connectiond	½" NPT or 3/4" BSP (with or without orientators)	
Change-Over Valve Kv	10.0 (Cv= 11.5)	(III) (III)
Materials of Construction	Stainless Steel	
Seat Materials	25% Carbon filled P.T.F.E.	
Temperature Range	-196°C to +200°C	
Max Design Pressure	75 bar	
Material Certifiation	BS EN ISO10204 3.1 Pressure Retaining Parts (Optional Extra)	
Safety Valve Orifice Size	Up to 10mm (Full Lift Type)	
Maximum Safety Valve Set Pressure	75 bar	

Specifications: COV13

System Connections	Please contact Seetru for information	
Valve Connections	Please contact Seetru for information	
Materials of Construction	Stainless Steel with Mild Steel or Stainless Steel Internals	
Seat Materials	Elastomer P.T.F.E	
Maxium Safety valve Set Pressure	65.0 bar	
Temperature Range	-30 °C to 200 °C (subject to seal material)	

Specifications: COV30

System Connections	1" to 1-1/2" BSP, BSPT, NPT, CL150 to CL600 & PN16 to PN100	
Valve Connections	%" to 1" BSP, BSPT, NPT (with or without orientators), CL150 to CL600 & PN16 to PN100	
Change-Over Valve Kv	30	
Materials of Construction	CF8M/316/1.4401	
Seat Materials	25% Carbon filled P.T.F.E.	200
Temperature Range	-196°C to +200°C	
Max Design Pressure	CL600 or PN100	
Material Certifiation	BS EN ISO10204 3.1 Pressure Retaining Parts (Optional Extra)	
Safety Valve Orifice Size	Up to 18mm (Full Lift Type)	0
Maximum Safety Valve Set Pressure	100 bar	



Operation Instructions: COV10 / COV30

1	Unlock handle if locking device fitted (recommended).
2	Starting in a motion away from the duty SRV, rotate handle through 180° (COV10) or 120° (COV10), either clockwise or anticlockwise dependent uponstart starting position.
3	Once fully rotated, lock in position if locking device fitted (recommended).
4	If the now standby SRV is to be remove: with caution, un-tighten vent nut of standby Change-over arm by $1\ \text{to}\ 2$ revolutions to exhaust trapped fluid from change-over arm.
5	Once trapped fluid has de-pressurised, re-tighten vent plug with a tightening torque of 3.0 Nm.
6	Remove the standby SRV.
7	The user may plug the vacant outlet if desired, however sufficient safety procedures (for example Lock out Tag out) must be in place to prevent inadv inadvertent change over, thus rendering the system un-protected against excessive pressure. If the outlet is plugged, vent arm of pressure, as previously described, prior to removal.





Fittings, Adaptors and Connections



- $The \, See tru\, COV 10\, and\, COV 30\, Change-Over\, Valves\, can\, be\, supplied\, with\, a\, range\, of\, fittings\, and\, adaptors\, to\, provide\, compatibility\, with\, a\, large\, variety\, of\, systems.$
- The COV30 is also available with flanged connections (A or PN).



Valves from Stock: Same-Day-Despatch

Our products are recognised globally for their exceptional quality and reliability, and in recent years Seetru have worked hard to maximise the efficiency of our manufacturing processes, to ensure that we are able to meet demands for supply and distribution. We now hold a large variety of safety valves in stock, allowing customers to purchase certain quantities from our website, and see them despatched on the same day.

Seetru offer atmospheric discharge safety valves and pipped discharge safety valves in brass / bronze or stainless steel. The Seetru LGS® range of pressure relief valves (for liquid, steam, and gasses) are available in bronze construction, with open-lever and sealed-cap options. These valves can be fitted with PTFE or EPDM seals, with both types having the WRAS approval- for installation on public water supply systems.

Seetru also operate a standardised three-day-despatch delivery service, which covers the entire range of valves we manufacture.

0



This compact, lightweight and portable design is very robust and able to meet the demands of a busy maintenance workshop or mobile operation. The Seetru Quicktester™ can be used with plant generated air supplies or with mobile bottled gas. This test-bench can be supplied with a range of adaptors allowing connection between 1/4" to 1" BSP as standard, additional adaptors are available increasing the connection sizes up to 2" BSP. The Quicktester™ is also available with NPT connection adaptors upon request. It is suitable for use with a wide range of elastomer sealed valves

Liquid Level Gauges

There are many industrial applications that require the monitoring of the liquid level in tanks. While the function of a level gauge is relatively simple, there are a variety of options available. The suitability and robustness of construction materials play a role in determining which gauge is required, as do the operating temperature and pressure requirements. Seetru liquid level gauges are primarily of two types, sight gauges and magnetic float by-pass gauges. Many of the Seetru gauges are direct reading though most have optional electronic remote reading systems and computer interfaces. The range includes the Quickmount, Seemag and CPI gauges for industrial and chemical applications and the Seeflex and Seemag for marine applications.

