Seetru Limited

Seetru are Bristol-based manufacturers of safety relief and other special purpose ancillary valves for a wide range of compressed air, industrial gas, refrigerants, powder, steam, liquid and liquefied gas applications. Seetru change-over valves offer increased plant and process efficiency.

Seetru liquid level gauges are primarily of two types, sight gauges and magnetic float bypass gauges. Many of the gauges are direct reading though most have optional electronic remote reading systems and computer interfaces.



Seetru Safety Relief Valves





Edition: 25th October 2022

Seetru Limited



Seetru Limited was founded in 1949 with the aim of producing the finest liquid level gauges so customers could "see the true" level even under the most severe conditions. This philosophy of making the finest through innovation continued with the introduction of the Seetru range of pressure relief devices, circa 1950 the Seetru Tutchtite-sealing system revolutionized the safety valve market with valves that do not leak even after repeated popping even at high pressures.

Today, Seetru have an extensive range of Pressure Relief Valves and Liquid Level Gauges which carry a wide range of international approvals and are supplied worldwide.

Our Products

Seetru are Bristol-based manufacturers of safety relief valves and other special purpose ancillary valves for a wide range of compressed air, industrial gas, refrigerants, powder, steam, liquid and liquefied gas applications. These valves meet important international standards which include: ISO 4126 and ASME Section VIII Division 1 design codes as well as type test approvals from TÜV and the National Board. These products comply with the requirements of the European Pressure Equipment Directive (PED) and are available with both the CE mark as well as the UV stamp, and have wide international approvals such as the EAC (TR CU) customs union certification and declaration and the Canadian CRN. Seetru products are fully compliant with the requirements of the UK Pressure Equipment (Safety) Regulations and will become available with the UKCA mark during 2022.



Seetru also have a wide range of special purpose valves. The range includes Change-Over Valves (designed for switching parallel safety valves without interrupting operation), Minimum Pressure Check Valves (typically suitable for application on compressors), Air-Start Valves (designed to handle a two-stage operation for air starting of engines). We also manufacture a range of Air Receiver & In-line Check Valves.

Seetru liquid level gauges are primarily of two types, sight gauges and magnetic float by-pass gauges. Many of the gauges are direct reading though most have optional electronic remote reading systems and computer interfaces. The range includes the Quickmount, Seemag and CPI gauges for industrial and chemical applications, and the Seeflex and Seemag for marine applications. The Company's substantial design and development department, which includes TÜV approved testing facilities, enable us to provide extensive bespoke design, advisory and manufacturing services to develop or adapt individual products for new applications.



Seetru Safety Relief Valves

Repeatable bubble-tight sealing performance





Table of contents

ТҮРЕ	PRODUCT / DESIGN	MATERIALS	INLET CONNECTIONS	PRESSURES	PAGE
818	Atmospheric Discharge	Brass	1/4" TO 1" BSP, BSPT OR NPT	0.48 To 46.0 Bar	<u>4-6</u>
848	Atmospheric Discharge	Stainless Steel	1/4" TO 1/2" BSP, BSPT OR NPT	0.55 To 21.0 Bar	<u>7-9</u>
616	Atmospheric Discharge	Brass	1/4" TO 2" BSP, BSPT OR NPT	2.0 To 55.0 Bar	<u>10-12</u>
73008 / 74008	Atmospheric Discharge	Brass Or Stainless Steel	1/4" TO 1/2" BSP, BSPT OR NPT	0.27 To 17.5 Bar	<u>13-18</u>
10625	Atmospheric Discharge	Brass Or Aluminium	1" TO 2" BSP, BSPT OR NPT	0.50 To 12.0 Bar	<u>19-21</u>
31140	Atmospheric Discharge	Brass	2" BSP, BSPT OR NPT AND 2 1/2" BSPT	2.8 To 9.4 Bar	22-24
31180	Atmospheric Discharge	Brass	1/4" BSP, BSPT OR NPT	20.6 To 134.5 Bar	<u>25-27</u>
31210	Atmospheric Discharge	Brass With Stainless Steel Inlet	3/8" TO 3/4" BSP OR BSPT	48.2 To 241.4 Bar	<u>28-30</u>
55004	Atmospheric Discharge	Brass With Stainless Steel Inlet	1/4" TO 1/2" BSP	69 To 448.2 Bar	<u>31-33</u>
LGS &	Englaced Discharge	Bronze With Brass Inlet	DN15 /1/2"\ TO DN65 /2 1/2"\	0.2 To 24.0 Par	24.27
LGS HI FLOW	Enclosed Discharge	Ptfe Or Elastomer Sealing	DN15 (1/2") TO DN65 (2 1/2")	0.2 To 24.0 Bar	<u>34-37</u>
636/656/646	Enclosed Discharge	Bronze Or Stainless Steel	3/8" TO 2" BSP, BSPT OR NPT	0.32 To 55.2 Bar	<u>38-43</u>
63608	Enclosed Discharge	Brass With Pps Plastic Outlet Body	1/4 TO 1/2" BSP, BSPT OR NPT	0.3 To 13.2 Bar	<u>44-46</u>
86810	Enclosed Discharge	Brass With Pps Plastic Outlet Body	1/2" TO 3/4" BSP, BSPT OR NPT	7.0 To 16.0 Bar (Not Full Range)	<u>47-49</u>
356/346	Enclosed Discharge	Bronze Or Stainless Steel	3/8" TO 3/4" BSP, BSPT OR NPT	0.83 To 30.76 Bar	<u>50-52</u>
025/045	Enclosed Discharge	Bronze Stainless Steel	1/2" TO 2" DCD DCDT OD NDT	0.2 To 20.0 Doz	E2 EE
936/946	Threaded Connections	Metal To Metal Sealing	1/2" TO 2" BSP, BSPT OR NPT	0.3 To 28.0 Bar	<u>53-55</u>
33020 / 34020 / 34320	Enclosed Discharge	Brass Or Stainless Steel	3/8" TO 1/2" BSP, BSPT OR NPT	55.0 To 103.4 Bar	<u>56-58</u>
33110 / 34110 / 34410	Enclosed Discharge	Brass Or Stainless Steel	3/8" TO 1/2" BSP, BSPT OR NPT	27 To 241.3 Bar	<u>59-61</u>
329	Enclosed Discharge	Bronze Or Stainless Steel	3/8" TO 3/4" BSP, BSPT OR NPT	53.0 To 370.0 Bar	<u>62-64</u>
359	Enclosed Discharge	Stainless Steel	3/8" TO 1/2" BSP, BSPT OR NPT	35.0 To 500.0 Bar	<u>65-67</u>
6G6	Enclosed Discharge	Stainless Steel	1/2" TO 1" TRI-CLAMP	0.32 To 55.2 Bar	68-70
CLEAN SERVICE	Tri-Clamp Connections	Fda Compliant Elastomer Sealing	1/2 TO I THI CLAIVII	0.52 10 55.2 Bui	00 70
946 FLANGED	Enclosed Discharge	Stainless Steel	DN20 (3/4") OR DN25 (1") DIN OR	0.3 To 28.0 Bar	71-73
- STOTEANGED	Flanged Connections	Starries Steel	ANSI FLANGES	0.5 TO 20.0 But	71.75
646 FLANGED	Enclosed Discharge	Stainless Steel	DN20 (3/4") OR DN25 (1") DIN OR	0.32 To 49.0 Bar	<u>74-76</u>
- STOTEANGED	Flanged Connections	Starries Steel	ANSI FLANGES	0.52 TO 45.0 But	74.70
636/646 REFRIG	ATMOSPHERIC DISCHARGE	BRONZE OR STAINLESS STEEL	3/8" TO 1 1/2" BSP, BSPT OR NPT (UNF)	7.0 To 55.2 Bar	<u>77-82</u>



for compressed air or gases

Seetru Limited

Type 818 / 811

Safety valves made from Brass < Atmospheric discharge with threaded connections <

Example Applications

- Compressors
- Pressure vessels
- Pneumatic systems
- Transport and railway systems



Specifications

- Inlet connections: ¼" to 1" (depending on bore size)
- Temperature:-60°C to +200°C (depending on seal material)
- Pressure range: 0.48 to 46.0 barg (depending on bore size)



Approvals

- TÜV Type test approval 936 (for 6mm bore)
- TÜV Type test approval 893 (for 8 to 15mm bore)
- Designed in accordance with BS EN SO 4126-1.
- PED 2014/68/EU
- ASME code section VIII for air/gas
- CRN
- EAC



Materials of Construction

Component	Material	Grade
Body	Brass	CW614N
Internal Parts	Brass	CW614N
Spring	Stainless Steel	1.4310 (302)

Seal Materials


Seal Material	Temperature Range
FKM (Viton®)	-15°C to +200°C
Hydrogenated Nitrile (HNBR)	-60°C to +150°C

Easing Gear / Lifting Gear Options

- Standard option Rota-lift cap, twist type
- Spindle lift for 6mm and 8mm bore valves
- Ring-pull option available upon request

Other options:

¹Downward deflecting shroud available for valves with 8 to 15mm bore.



¹VIEW SHOWING OPTIONAL SHROUD AVAILABLE



	_

Bore size	6 r	nm	8 mm 10 mm		13	13 mm		15 mm			
Inlet Size	1/4"	3/8"	1/4"	3/8"	1/2"	1/2"	3/4"	1/2"	3/4"	3/4"	1"
Flow Area	28.3	mm²	5	0.27 mm	12	78.54	mm²	132.7	⁷ mm ²	181.5	mm²
H - Height (Rota-lift cap)	53.5	mm		52 mm			to 21 bar g) 21-46 barg)	951	mm	119	mm
TÜV allotted outflow coefficient 1	0.	67		0.67		0.0	67	0.	64	0.	72
NB Rated discharge coefficient (ASME)	0.7	748		0.748		-		-	-		
NB Certified rated slope (ASME)				-		1.66 sc	fm/psia	2.94 sc	fm/psia	4.04 sc	fm/psia
Weight (approximate) Kg	0.	07		0.15		0	35	0.	40	0.	65
Set Pressure range - PED (CE) (Bar g)	2.8-	36.0	C).55- 21.	0	0.48-	46.0	2.8-	21.0	2.5-	21.0
Set Pressure range - ASME (UV) (psi g)	40.6-	522.0	4	3.5- 304	.5	34.8-	667.0	40.6-	304.5	36.25-	- 304.5
Relieving pressure/fully open pressure	Set pressure +10%										
Reseating pressure						Set press	ure -10%				

1 TÜV alloted outflow coefficients for pressures above 3.0 bar g, for lower pressures please see the flow rate tables or contact Seetru.

Valves with Rota-lift Easing Gear



Standard Thread Connection Types



- BSP Parallel male thread
- BSP Taper male thread
- NPT male thread

H INLET THREAD

Valve Selection Guide



Approval Required	Valve Type	Select Bore	Inlet Size	Thread Type	Easing Gear	 Seal Material
		"06" = 6mm				
PED (CE)	"818"	"88" = 8mm				Viton®
		"10" = 10mm	Select inlet		Select easing	
PED (CE),	"811"	"13" = 13mm	size from above table	Select thread type	gear (rota-lift is the standard option)	LIMPD
ASME (UV) & CRN	811	"15" = 15mm				HNBR

EAC marking available upon request

*Please send your selected details to Seetru and we can provide the full ordering code, price and lead-time.




Example	CE	818	06	1/4"	BSP Taper		Viton	
Selection	Approval	Valve Type	Bore = 6mm	Inlet Size	Thread Type	Easing Gear	Seal	Set Pressure



Capacity Table - In accordance with TÜV, AIR at 0°C and 1013mbar. Normal m³/hour

Type 818: Flow rates at 10% above the set pressure

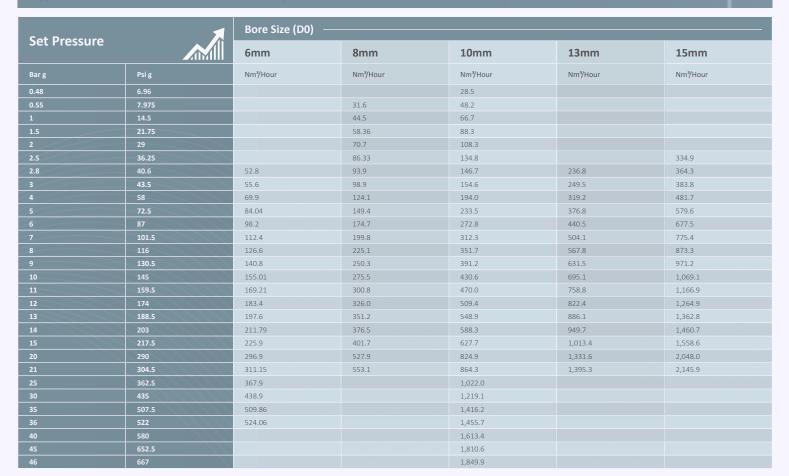

Capacity Table - In accordance ASME section VIII Div I, AIR at 60°F and 14.7 psia/scfm. SCFM

Type 811 (818): Flow rates at 10% above the set pressure.





RETURN TO CONTENTS PAGE

Seetru Limited

for compressed air or gases

Type 848 / 841

Safety valves made from Stainless Steel < Atmospheric discharge with threaded connections <

Example Applications



- Pressure vessels
- Pneumatic systems
- Transport and railway systems



Specifications


- Inlet connections: ¼" to 1/2"
- Temperature:-60°C to +200°C (depending on seal material)
- Pressure range: 0.55 to 21.0 barg

Approvals

- TÜV Type test approval 893
- Designed in accordance with BS EN SO 4126-1.
- P.E.D. 2014/68/EU
- A.S.M.E. code section VIII for air/gas
- CRN
- EAC



Materials of Construction

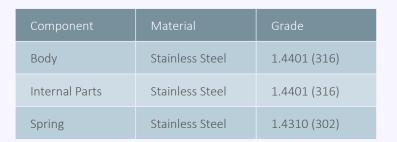

Seal Materials

Seal Material	Temperature Range
Viton® (FKM)	-15°C to +200°C
Hydrogenated Nitrile (HNBR)	-60°C to +150°C

Easing Gear / Lifting Gear Options

- Standard option Rota-lift cap, twist type
- Other option Spindle lift




K

Valves with Rota-lift Easing Gear



Bore size	8mm			
Inlet Size	1/4"	3/8"	1/2"	
Flow Area	50.27 mm²			
H - Height (Rota-lift cap)	52mm (1/4" & 3/8") 56mm (1/2")			
TÜV alloted outflow coefficient ¹	0.67			
NB Rated discharge coefficient (ASME)	0.748			
Weight (approximate) Kg	0.3			
Set Pressure range - PED (CE) Bar g	0.55- 21.0			
Set Pressure range - ASME (UV) psi g	43.5- 304.5			
Relieving pressure/fully open pressure	Set Pressure +10% (0.1 Bar.g below 1.0 Bar.g)			
Reseating pressure		t pressure-1 r.g below 3.		

¹ TÜV alloted outflow coefficients for pressures above 3.0 bar g, for lower pressures please see the flow rate tables or contact Seetru.

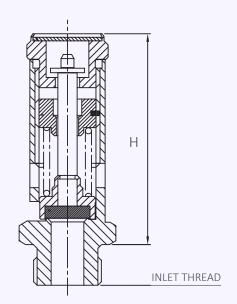


Standard Thread Connection Types

- BSP Parallel male thread
- BSP Taper male thread
- NPT male thread

Valve Selection Guide




EAC marking available upon request





^{*}Please send your selected details to Seetru and we can provide the full ordering code, price and lead-time.

Capacity Table - In accordance with **TÜV**, AIR at 0°C and 1013mbar. Normal m³/hour Type 848: Flow rates at 10% above the set pressure.

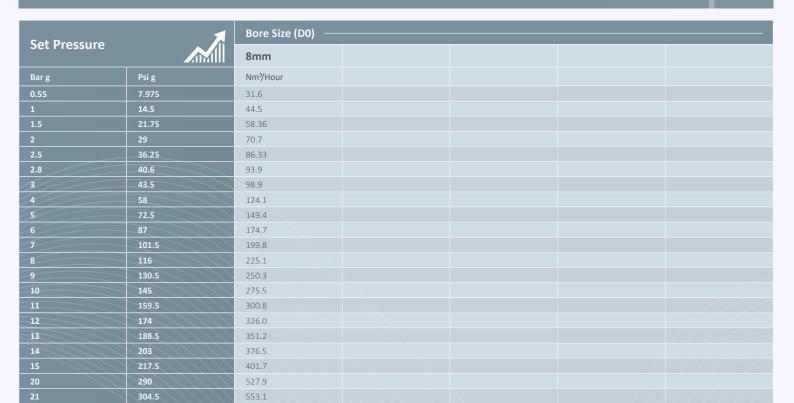

Capacity Table - In accordance **ASME** section VIII Div I, AIR at 60°F and 14.7 psia/scfm. SCFM Type 841 (848): Flow rates at 10% above the set pressure.

Set Pressure		Bore Size (D0)				
		8mm				
Psi g	Bar g	SCFM				
43.5	3.00	66.8				
50	3.45	74.4				
60	4.14	86.1				
70	4.83	97.9				
80	5.52	109.6				
90	6.21	121.4				
100	6.90	133.1				
150	10.34	191.8				
200	13.79	250.5				
250	17.24	309.2				
300	20.69	367.9				
304.5	21.00	373.2				




Seetru Limited

for compressed air or gases

Type 616 / 611

Safety valves made from Brass < Atmospheric discharge with threaded connections <

Example Applications




- Pressure vessels
- Pneumatic systems
- Transport and railway systems

Specifications

- Inlet connections: ¼" to 2" (depending on bore size)
- Temperature:-40°C to +200°C (depending on seal material)
- Pressure range: 2.0 to 55.0 barg (depending on bore size)

Materials of Construction

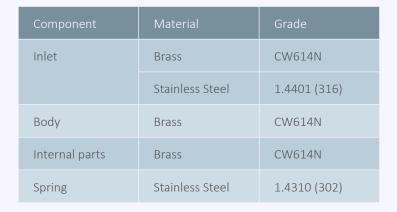



Approvals

- TÜV Type test approval 685 (for 8mm bore)
- TÜV Type test approval 622 (for 10 to 20mm bore)
- Designed in accordance with BS EN SO 4126-1.
- PED 2014/68/EU
- ASME code section VIII for air/gas (for 18mm & 20mm bore valves only)
- CRN (for 18mm & 20mm bore valves only)
- EAC

Seal Materials


Seal Material	Temperature Range
Viton® (FKM)	-15°C to +200°C
Nitrile (NBR)	-40°C to +120°C

Easing Gear / Lifting Gear Options

- Standard option Rota-lift cap, twist type
- None No easing gear
- Lever lift available on request (10-20mm bores)

Other options:

¹Downward deflecting shroud available for valves with 10 to 20mm bores (show image)



¹VIEW SHOWING OPTIONAL SHROUD AVAILABLE



RETURN TO CONTENTS PAGE

Bore Size		8mm		10mm (9.6mm)		13mm			18mm			20mm				
Inlet Size	1/4"	3/8"	1/2"	3/8"	1/2" 3,	4"	1"	3/4"	1"	1 1/4"	1"	1 1/4"	1 1/2"	1"	1 1 1/4" 1/2	2"
Flow Area	Ē	50.27mm	2	72.4mm²		132.7mm²		254.5mm²		314.0mm²						
H - Height (Rota-lift cap version)	81mm		109mm (up to 19 barg) 119.5mm (19-44 barg)		124.5 barg		148mm (up to 18 barg) 156mm (18-36 barg)		166mm							
TÜV allotted outflow coefficient ¹	0.7		0.71		0.81			0.81		0.76						
NB Certified rated slope (ASME)	×		X		X			6.04 scfm/psia		7.32 scfm/psia						
Weight (approximate) Kg		0.4		0.8		1.0			1.8			2.1				
Set Pressure range - PED (CE) (Barg)		14.5- 55.0)	2.3- 44.0		2.8- 41.4			2.1- 36.0		2.0- 18.0					
Set Pressure range - ASME (UV) (psi g)		X		X		X			30.45- 522.0		29.0- 261.0					
Relieving pressure/fully open pressure							Set p	ressure +	-10%							
Reseating pressure	Set pressure -10%															

Valves with Rota-lift Easing Gear



Standard Thread Connection Types



- BSP Parallel male thread
- BSP Taper male thread
- NPT male thread

INLET THREAD

Valve Selection Guide



Approval Required	Valve Type	Select Bore	Inlet Size	Thread Type	Easing Gear	Seal Material	
	616	616 82 = 8mm					
PED (CE)	(Brass inlet)	10 = 9.6mm				Viton® (FKM)	
. 23 (32)	626	20 31011111		Select thread	Select easing	()	
	(St. Steel inlet)	13 = 13mm	Select inlet		gear (rota-lift		
PED (CE),	611 (Brass inlet)	18 = 18mm	size from above table	type	is the standard option)	Nitrilo (NDD)	
ASME (UV) & CRN	621 (St. Steel inlet)	20 = 20mm				Nitrile (NBR)	

EAC marking available upon request




Example	CE	616	13	1"	BSP Taper	Rota-lift	Viton	10.5 barg
Selection	Approval	Valve Type	Bore = 13mm	Inlet Size	Thread Type	Easing Gear	Seal	Set Pressure



^{*}Please send your selected details to Seetru and we can provide the full ordering code, price and lead-time.

Capacity Table - In accordance with TÜV, AIR at 0°C and 1013mbar. Normal m³/hour

Type 616: Flow rates at 10% above the set pressure.

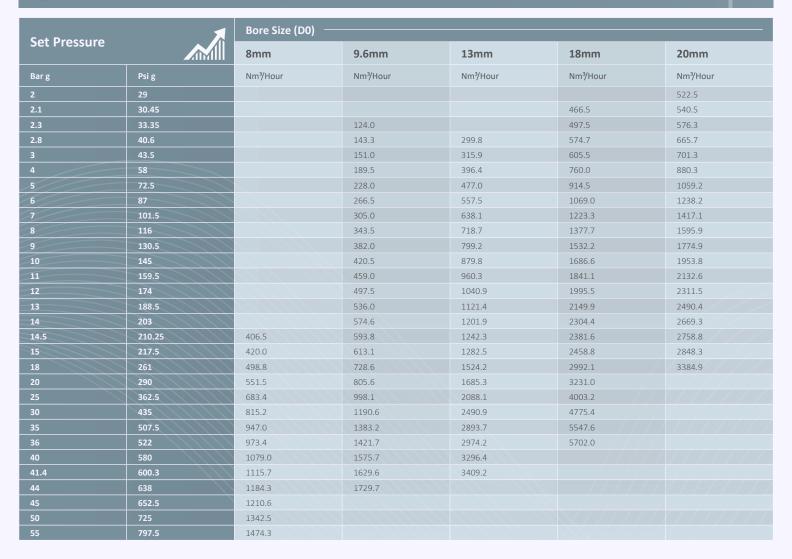

Capacity Table - In accordance ASME section VIII Div I, AIR at 60°F and 14.7 psia/scfm. SCFM

Type 616 (611): Flow rates at 10% above the set pressure

Set Pressure		Bore Size (D0)								
		8mm	9.6mm	13mm	18mm	20mm				
Psi g	Bar g	SCFM	SCFM	SCFM	SCFM	SCFM				
29	2.00					341				
30.45	2.50				291	525				
35	2.41				321	389				
40	2.80				355	429				
50	3.45				421	510				
60	4.14				487	590				
70	4.83				554	671				
80	5.52				620	751				
90	6.21	Not	Not	Not	687	832				
100	6.90	ASME	ASME	ASME	753	912				
150	10.34	Approved	Approved	Approved	1085	1315				
200	13.79				1418	1717				
250	17.24				1750	2120				
300	20.69				2082					
350	24.14				2414					
400	27.59				2746					
450	31.03				3079					
500	34.48				3411					
522	36.00				3557					



RETURN TO CONTENTS PAGE

Seetru Limited

for compressed air or gases

Type 73008

Safety valves made from Brass < Atmospheric discharge with threaded connections <

Example Applications



- Pressure vessels
- Pneumatic systems
- Transport and railway systems

Specifications

- Inlet connections: ¼" to 1/2"
- Temperature:-40°C to +200°C (depending on seal material)
- Pressure range: 0.27 to 17.5 barg



Approvals

- TÜV Type test approval 276
- Designed in accordance with BS EN SO 4126-1.
- P.E.D. 2014/68/EU
- EAC



Materials of Construction


Component	Material	Grade
Body	Brass	BS2874 CZ121
Internal Parts	Brass	BS2874 CZ122
Spring	Stainless Steel	BS2056 302S26

Seal Materials

Seal Material	Temperature Range
Viton® (FKM)	-15°C to +200°C
Nitrile (NBR)	-40°C to +120°C

Easing Gear / Lifting Gear Options

- **Standard option** Rota-lift cap, twist type
- Other option Spindle lift





Bore size	7.9mm				
Inlet Size	1/4" 3/8" 1/2"				
Flow Area		49mm²			
H - Height (Rota-lift cap)	46mm				
TÜV alloted outflow coefficient 1	0.63				
Weight (approximate) Kg		0.15			
Set Pressure range - PED (CE) Bar g		0.27 to 17.5	5		
Relieving pressure/fully open pressure	Set Pressure +10% (0.1 Bar.g below 1.0 Bar.g)				
Reseating pressure	Set pressure -10% (0.3 Bar.g below 3.0 Bar.g)				

 $^{1\,\}text{T\"{UV}}$ alloted outflow coefficients for pressures above 3.0 bar g, for lower pressures please see the flow rate tables or contact Seetru.

INLET THREAD

Standard Thread Connection Types



- BSP Parallel male thread
- BSP Taper male thread
- NPT male thread

Valve Selection Guide



Approval Required	Valve type	Select Bore	Inlet Size	Thread Type	Easing Gear	Seal Material
252 (25)	7000		Select inlet size		Select easing gear	Viton®
PED (CE)	73008	8mm	from above table	Select thread type	(rota-lift is the standard option)	Nitrile

EAC marking available upon request



	CE	73008			BSP Taper	Rota-lift	Viton	8.5	
Selection	Approval	Valve Type	Bore = 8mm	Inlet Size	Thread Type	Easing Gear	Seal	Set Pressure	



^{*}Please send your selected details to Seetru and we can provide the full ordering code, price and lead-time.

Capacity Table - In accordance with **TÜV**, AIR at 0°C and 1013mbar. Normal m³/hour Type 73008: Flow rates at 10% above the set pressure

	⊼	Bore Size (D0)
Set Pressure		7.9mm
Bar g	Psi g	Nm³/Hour
0.27	3.915	19.8
0.5	7.25	27.5
1	14.5	40.9
1.5	21.75	54.2
2	29	66.5
3	43.5	90.7
4	58	113.8
5	72.5	137.0
6	87	160.1
7	101.5	183.3
8	116	206.4
9	130.5	229.5
10	145	252.7
11	159.5	275.8
12	174	298.9
15	217.5	368.4
17.5	253.75	426.2



Seetru Limited

for compressed air or gases

Type 74008

Safety valves made from Stainless Steel < Atmospheric discharge with threaded connections <

Example Applications



- Compressors
- Pressure vessels
- Pneumatic systems
- Transport and railway systems

Specifications



- Inlet connections: ¼" to 1/2"
- Temperature:-40°C to +200°C (depending on seal material)
- Pressure range: 0.27 to 17.5 barg





- TÜV Type test approval 276
- Designed in accordance with BS EN SO 4126-1.
- P.E.D. 2014/68/EU
- EAC



Materials of Construction



Component	Material	Grade
Body	Stainless Steel	BS970 316S31
Internal Parts	Stainless Steel	BS970 316S31
Spring	Stainless Steel	BS2056 302S26


Seal Materials



Seal M	aterial	Temperature Range
Viton® (FKM)	-15°C to +200°C
Nitrile (NBR)	-40°C to +120°C

Easing Gear / Lifting Gear Options

- **Standard option** Rota-lift cap, twist type
- Other option Spindle lift





Bore size	7.9mm					
Inlet Size	1/4" 3/8" 1/2"					
Flow Area	49mm²					
H - Height (Rota-lift cap)	46mm					
TÜV alloted outflow coefficient 1		0.63				
Weight (approximate) Kg		0.15				
Set Pressure range - PED (CE) Bar g	0.27 to 17.5					
Relieving pressure/fully open pressure	Set Pressure +10% (0.1 Bar.g below 1.0 Bar.g)					
Reseating pressure	Set pressure -10% (0.3 Bar.g below 3.0 Bar.g)					

 $1\,\text{T\"{UV}}$ alloted outflow coefficients for pressures above 3.0 bar g, for lower pressures please see the flow rate tables or contact Seetru.

INLET THREAD

Standard Thread Connection Types



- BSP Parallel male thread
- BSP Taper male thread
- NPT male thread

Valve Selection Guide



ı	Approval Required	Valve type	Select Bore		Thread Type	Easing Gear	Seal Material
	PED (CE) 74008		Select inlet size		Select easing gear	Viton®	
		8mm	from above table	Select thread type	(rota-lift is the standard option)	Nitrile	

EAC marking available upon request



Example	CE	74008	8	1/4"	BSP Taper	Rota-lift	Viton	8.5
Selection	Approval	Valve Type	Bore = 8mm	Inlet Size	Thread Type	Easing Gear	Seal	Set Pressure



^{*}Please send your selected details to Seetru and we can provide the full ordering code, price and lead-time.

Capacity Table - In accordance with **TÜV**, AIR at 0°C and 1013mbar. Normal m³/hour Type 74008: Flow rates at 10% above the set pressure

Set Pressure		Bore Size (D0)						
		7.9mm						
Bar g	Psi g	Nm³/Hour						
0.27	3.915	19.8						
0.5	7.25	27.5						
1	14.5	40.9						
1.5	21.75	54.2						
2	29	66.5						
3	43.5	90.7						
4	58	113.8						
5	72.5	137.0						
6	87	160.1						
7	101.5	183.3						
8	116	206.4						
9	130.5	229.5						
10	145	252.7						
11	159.5	275.8						
12	174	298.9						
15	217.5	368.4						
17.5	253.75	426.2						



for compressed air or gases



Type 106 / 116

Safety valves made from Brass or Aluminum <

Atmospheric discharge with threaded connections – FKS approved <

Example Applications




- Pressure vessels
- Pneumatic systems
- Particle laden air/gas (FKS)
- Transport vehicles

Specifications

- Inlet connections: 1" to 2"
- Temperature: -40°C to +200°C (depending on seal material)
- Pressure range: 0.5 to 12.0 barg


Materials of Construction

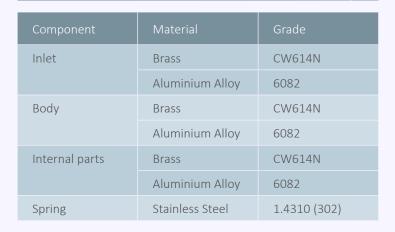



Approvals

- TÜV Type test approval 926
- FKS approval for particle laden gases
- Designed in accordance with BS EN SO 4126-1.
- PED 2014/68/EU
- ASME code section VIII for air/gas
- CRN
- EAC







Seal Materials


Seal Material	Temperature Range			
Viton® (FKM)	-15°C to +200°C			
Nitrile (NBR)	-40°C to +120°C			

Easing Gear / Lifting Gear Options

Standard option – Rota-lift cap, twist type

Other options:

¹Downward deflecting shroud available




¹VIEW SHOWING OPTIONAL SHROUD AVAILABLE



Valves with Rota-lift Easing Gear



Bore Size	25mm					
Inlet Size	1" 1 1/4" 1 1/2" 2"					
Flow Area		491	mm²			
H - Height (Rota-lift cap version)		172	mm			
TÜV allotted outflow coefficient ¹	0.78 (Above 3.6 Bar.g)					
NB Certified rated slope (ASME)		11.3 sc	fm/psia			
Weight (approximate) Kg	2	2.8 (for bi	rass valve)		
Set Pressure range - PED (CE) (Bar g)		0.5-12	.0 barg			
Set Pressure range - ASME (UV) (psi g)	7.25-174.0 barg					
Relieving pressure/fully open pressure	Set pressure +10%					
Reseating pressure	Set pressure-10%					

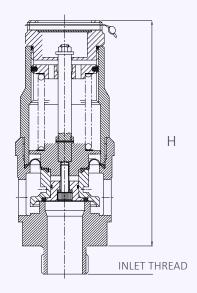

Standard Thread Connection Types



- BSP Parallel male thread
- BSP Taper male thread
- NPT male thread

Valve Selection Guide



	Approval Required	Valve type	Bore Size	Inlet Size	Thread Type	Easing Gear	Downward Deflecting Shroud Required?	Seal Material
	DED (CE)	106 (Brass valve)						Viton® (FKM)
	PED (CE) PED (CE), ASME (UV) & CRN	116 (Aluminium valve)	25=25mm	Select inlet size from above table	Select thread type	Select easing gear (rota-lift is the standard option)	Yes or No	
		101 (Brass valve)						Nitrila (NDD)
		111 (Aluminium valve)						Nitrile (NBR)

EAC marking available upon request



Example	CE	106	25	1"	BSP Taper	Rota-lift		Viton	
Selection	Approval	Valve Type	Bore = 25mm	Inlet Size	Thread Type	Easing Gear	No	Seal	Set Pressure



^{*}Please send your selected details to Seetru and we can provide the full ordering code, price and lead-time.

Capacity Table - In accordance with **TÜV**, AIR at 0°C and 1013mbar. Normal m³/hour **Type 106/116**: Flow rates at 10% above the set pressure

Call		Bore Size (D0)					
Set Pressure		25mm					
Bar g	Psi g	Nm³/Hour					
0.5	7.25	308					
1	14.5	466					
2	29	795					
3	43.5	1110					
4	58	1411					
5	72.5	1698					
6	87	1985					
7	101.5	2272					
8	116	2559					
9	130.5	2846					
10	145	3133					
11	159.5	3420					
12	174	3707					

Capacity Table - In accordance **ASME** section VIII Div I, AIR at 60°F and 14.7 psia/scfm. SCFM Type 106/116: Flow rates at 10% above the set pressure.

S-A Durant		Bore Size (D0)						
Set Pressure	Set Pressure							
Psi g	Bar g	SCFM						
7.25	0.50	282						
10	2.50	313						
20	1.38	426						
30	2.80	539						
40	2.76	663						
50	3.45	786						
60	4.14	912						
70	4.83	1036						
80	5.52	1161						
90	6.21	1285						
100	6.90	1409						
150	10.34	2031						
174	12.00	2329						



Seetru Limited

for compressed air or gases

Type 31140

Safety valves made from Brass < Atmospheric discharge with threaded connections <

Example Applications




- Compressors including PET compressors
- Pressure vessels
- Pneumatic systems

Specifications

- Inlet connections: 2" (or 2 ½" using adapter)
- Temperature:-40°C to +200°C (depending on seal material)
- Pressure range: 2.8 to 9.4 barg (2.8 to 3.8, 4.3 to 4.5, 5.5 & 7.7 to 9.4 barg)






Component	Material	Grade
Inlet	Brass	BS2874 CZ121
Body	Brass	BS2874 CZ121
Internal parts	Brass	BS2874 CZ121
Spring	Carbon Steel	BS5216



Approvals



- Designed in accordance with BS EN SO 4126-1.
- PED 2014/68/EU
- EAC





Seal Materials

Seal Material	Temperature Range
Viton® (FKM)	-15°C to +200°C
Nitrile (NBR)	-40°C to +120°C


Easing Gear / Lifting Gear Options

Standard option - knob-lift



Valves with Rota-lift Easing Gear

Bore size	size 37.5mm				
Inlet Size	2"	2 1/2"			
Flow Area	1104.5mm²				
H - Height	230mm				
TÜV alloted outflow coefficient	0.	0.74			
Weight (approximate) Kg	*				
Set Pressure range - PED (CE) Bar g	2.8 to 9.4 barg				
Relieving pressure/fully open pressure Set pressure +10%					
Reseating pressure	Set pressure-10%				

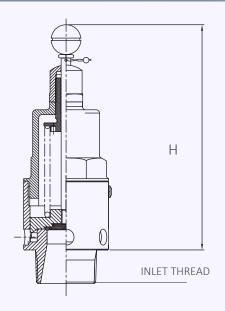

Standard Thread Connection Types



- BSP Parallel male thread
- BSP Taper male thread
- NPT male thread

Valve Selection Guide



Approval Required	Valve type	Inlet Size	Thread Type	Easing Gear	Seal Material
PED (CE)	31140	Select inlet size from above table	Select thread type	V	Viton® (FKM)
				Knob-lift only	Nitrile (NBR)

EAC marking available upon request



Example	CE	31140	2"	BSP Taper	Rota-lift	Viton	3.5 barg
Selection	Approval	Valve Type	Inlet Size	Thread Type	Knob-Lift	Seal	Set Pressure



^{*}Please send your selected details to Seetru and we can provide the full ordering code, price and lead-time.

Capacity Table - In accordance with **TÜV**, AIR at 0°C and 1013mbar. Normal m³/hour

Type 31140: Flow rates at 10% above the set pressure

	1	Bore Size (D0)	Bore Size (D0)				
Set Pressure		37.5mm					
Bar g	Psi g	Nm³/Hour					
2.8	40.6	2278					
3.8	55.1	2891					
4.3	62.35	3197					
4.5	65.25	3319					
5.5	79.75	3932					
7.7	111.65	5279					
8	116	5463					
9	130.5	6075					
9.4	136.3	6320					



Seetru Limited

for compressed air or gases

Type 31180

Safety valves made from Brass < Atmospheric discharge with threaded connections <

Example Applications




- Compressors
- Pressure vessels
- Pneumatic systems
- High pressure systems

Specifications

- Inlet connections: ¼" or 3/8"
- Temperature:-40°C to +200°C (depending on seal material)
- Pressure range: 20.6 to 134.5 barg



Approvals



- Designed in accordance with BS EN SO 4126-1.
- PED 2014/68/EU
- EAC





Component	Material	Grade
Inlet	Brass	CW614N
Body	Brass	CW614N
Internal parts	Brass	CW614N
Spring	Stainless Steel	302

Seal Materials

Seal Material	Temperature Range
Viton® (FKM)	-15°C to +200°C
Nitrile (NBR)	-40°C to +120°C

Easing Gear / Lifting Gear Options




Standard option – Spindle Lift





Bore size	3.2mm			
Inlet Size	1/4"	3/8"		
Flow Area	8.0mm²			
H - Height	42mm			
TÜV alloted outflow coefficient	0.54			
Weight (approximate) Kg	0.4			
Set Pressure range - PED (CE) Bar g	20.6 to 134.5 barg			
Relieving pressure/fully open pressure	Set pressure +10%			
Reseating pressure	Set press	sure-15%		

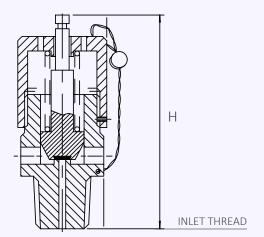

Standard Thread Connection Types



- BSP Parallel male thread (1/4" or 3/8")
- BSP Taper male thread (1/4")
- NPT male thread (1/4")

Valve Selection Guide



Approval Required	Valve type	Inlet Size	Thread Type	Easing Gear	Seal Material
PED (CE)	31180	Select inlet size from above table	Select thread type	Calladia life and	Viton® (FKM)
				Spindle lift only	Nitrile (NBR)

EAC marking available upon request



Example	CE	31180		BSP Taper	Spindle Lift	Viton	100 barg
Selection	Approval	Valve Type	Inlet Size	Thread Type	Easing Gear	Seal	Set Pressure



^{*}Please send your selected details to Seetru and we can provide the full ordering code, price and lead-time.

Capacity Table - In accordance with **TÜV**, AIR at 0°C and 1013mbar. Normal m³/hour

Type 31180: Flow rates at 10% above the set pressure

	1	Bore Size (D0)		
Set Pressure		3.2mm		
Bar g	Psi g	Nm³/Hour		
20.6	298.7	70.0		
30.0	435.0	100.6		
40.0	580.0	133.2		
50.0	725.0	165.7		
60.0	870.0	198.2		
70.0	1015.0	230.8		
80.0	1160.0	263.3		
100.0	1450.0	328.4		
110.0	1595.0	360.9		
120.0	1740.0	393.5		
130.0	1885.0	426.0		
134.5	1950.3	440.7		



Seetru Limited

for compressed air or gases

Type 31210

Safety valves made from Brass < Atmospheric discharge with threaded connections <

Example Applications



- Compressors
- Pressure vessels
- Pneumatic systems
- High pressure systems

Specifications



- Inlet connections: 3/8" to 3/4"
- Temperature:-40°C to +200°C (depending on seal material)
- Pressure range: 20.6 to 134.5 barg



Approvals




- TÜV Type test approval
- Designed in accordance with BS EN SO 4126-1.
- PED 2014/68/EU
- EAC





Materials of Construction

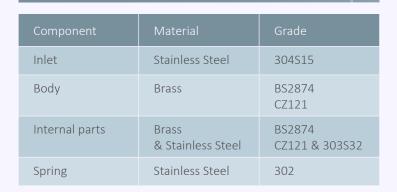

Seal Materials


Seal Material	Temperature Range
Viton® (FKM)	-15°C to +200°C
Nitrile (NBR)	-40°C to +120°C

Easing Gear / Lifting Gear Options



Standard option – No easing gear. Fitted with downward deflecting shroud

Optional - Lever lift easing gear








		\$\frac{1}{2}
--	--	---------------

Bore size	3.2mm					
Inlet Size	3/8" 1/2" 3/4"					
Flow Area	10.46mm²					
H - Height	94mm					
TÜV alloted outflow coefficient	0.68					
Weight (approximate) Kg	0.5					
Set Pressure range - PED (CE) Bar g	48.2 to 241.4					
Relieving pressure/fully open pressure	Set pressure +10%					
Reseating pressure	Se	t pressure-1	5%			

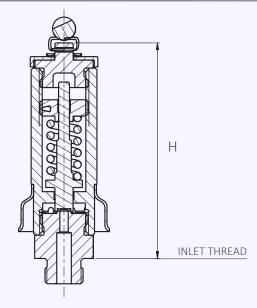

Standard Thread Connection Types



- BSP Parallel male thread (3/8",1/2" or 3/4")
- BSP Taper male thread (3/8" or 1/2")
- NPT male thread (1/2")

Valve Selection Guide



Approval Required	Valve type	Inlet Size	Thread Type	Easing Gear	Seal Material
PED (CE)	21210	Select inlet size from above table	Select thread type	News	Viton® (FKM)
	31210			None	Nitrile (NBR)

EAC marking available upon request



Example	CE	31210	1/2"	BSP parallel	None		100 barg
Selection	Approval	Valve Type	Inlet Size	Thread Type	Easing Gear	Seal	Set Pressure



^{*}Please send your selected details to Seetru and we can provide the full ordering code, price and lead-time.

Capacity Table - In accordance with **TÜV**, AIR at 0°C and 1013mbar. Normal m³/hour

Type 31210: Flow rates at 10% above the set pressure

		Bore Size (D0)				
Set Pressure		3.65mm				
Bar g	Psi g	Nm³/Hour				
48.2	698.9	261.8				
50.0	725.0	271.5				
60.0	870.0	324.8				
70.0	1015.0	378.1				
80.0	1160.0	431.4				
90.0	1305.0	484.7				
100.0	1450.0	538.0				
150.0	2175.0	804.6				
200.0	2900.0	1071.1				
240.0	3480.0	1284.1				
241.4	3500.3	1292.1				



Seetru Limited

for compressed air or gases

Type 55004

Safety valves made from Brass < Atmospheric discharge with threaded connections <

Example Applications



- Compressors
- Pressure vessels
- Pneumatic systems
- High pressure systems

Specifications



Temperature: 0°C to 100°C

Pressure range: • 69.0 to 448.2 barg (3/8" and 1/2")

69.0 to 345.0 barg (1/4")

Materials of Construction



Component	Material	Grade
Inlet	Stainless Steel	303S21
Body	Brass	BS2874 CZ121
Internal parts	Brass	BS2874 CZ121
Spring	Carbon Steel	BS2803 685A55 R2



Approvals

- TÜV Type test approval
- Designed in accordance with BS EN SO 4126-1.
- PED 2014/68/EU
- EAC





Seal Materials

Seal Material	Temperature Range
Viton® (FKM)	0°C to 100°C
Nitrile (NBR)	0°C to 100°C

Easing Gear / Lifting Gear Options


Standard option – No easing gear.







Bore size	3.73mm					
Inlet Size	1/4" 3/8" 1/2"					
Flow Area	10.95mm²					
H - Height	90mm					
TÜV alloted outflow coefficient	0.082					
Weight (approximate) Kg	0.5					
Set Pressure range - PED (CE) Bar g	69 to 448.2 barg (Max. 345 barg for 1/4")					
Relieving pressure/fully open pressure	Set pressure +10%					
Reseating pressure	Set pressure-15%					

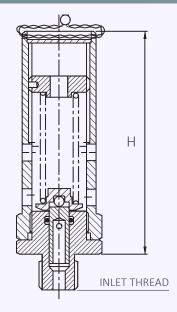

Standard Thread Connection Types



BSP Parallel male thread

Valve Selection Guide



Approval Required	Valve type	Inlet Size	Thread Type	Easing Gear	Seal Material
PED (CE) 55	FF004	Select inlet size from above table	C-1++	Nene	Viton® (FKM)
	55004		Select thread type	None	Nitrile (NBR)

EAC marking available upon request



Example	CE	55004	1/2"	BSP parallel			100 barg
Selection	Approval	Valve Type	Inlet Size	Thread Type	Easing Gear	Seal	Set Pressure



^{*}Please send your selected details to Seetru and we can provide the full ordering code, price and lead-time.

Capacity Table - In accordance with **TÜV**, AIR at 0°C and 1013mbar. Normal m³/hour

Type 55004: Flow rates at 10% above the set pressure

	*	Bore Size (D0)	Bore Size (D0)				
Set Pressure		3.73					
Bar g	Psi g	Nm³/Hour					
69.0	1000.5	46.9					
100.0	1450.0	67.8					
150.0	2175.0	101.3					
200.0	2900.0	134.9					
250.0	3625.0	168.5					
300.0	4350.0	202.0					
350.0	5075.0	235.6					
400.0	5800.0	269.2					
448.0	6496.0	301.4					



hot water

compressed air & gas



Safety valves made from Brass < Enclosed discharge with threaded connections <

Features

- Bronze body with dezincification resistant brass wetted parts; stainless steel spring, spindle and seal retainer
- Size range DN15 to DN50 (1/2" BSP to 2" BSP)
- Pressure Range: 0.2 to 24 bar g. (steam up to 14 bar g. with PTFE seals, contact Seetru for information on other seals)
- Temperature Range:-60°C to +200°C (with PTFE seals (EPDM-45°C to +140°C)
- Degrease for oxygen available on request
- PTFE or EPDM sealing as standard (other seal materials available upon request)
- Easy to fit spares kit
- Self-draining design
- Adaptors available to give male connections
- Open Lever or Sealed Cap
- Designed in accordance with the requirements of BS EN ISO 4126 Part 1 and CE marked as a Category IV Safety Accessory
- KUKReg 4 Regulation 4 approved
- WRAS approval
- Available for quick delivery using our Same Day Despatch Service SAME DAY DESPATCH •

- Supplied with Declaration of conformity, EN 10204 3.1 material certification available on request
- Test certificate supplied free of charge

Applications

- Hot water, including boilers (vented and unvented)
- Steam boilers and steam plants
- Pump and thermal relief
- · Bypass relief
- Process liquids and gases
- · Pressure vessels and lines

- Heating and cooling systems
- Heat exchangers and industrial cooling systems
- Refrigeration systems
- · Pressure booster systems
- Solar power systems
- District heating systems

Open Lever / Sealed Cap


Seetru Limited



- Water supply systems
- Sewage systems
- Pressure control and regulation
- Chemical plants
- District heating systems
- Ship building and marine applications

	COMPONENT	MATERIAL					
1	Seat	Dezincification Resistant Material					
2	Lift Aid Assembly	Dezincification Resistant Material					
3	Body	Bronze CC491K / C83600					
4	Piston	Dezincification Resistant Material					
5	Spring	Steel 1.4401					
6	Adjuster	Brass					
7	Сар	Brass					
8	Cover	Brass					
9	Lever	Brass					
10	Wire Lock	Steel & Lead					
11	O-Ring	EPDM					
12	Locking Slug	Nylon					
13	Spindle	Stainless Steel					
14	Seal	PTFE or EPDM					

Dimensional Drawing

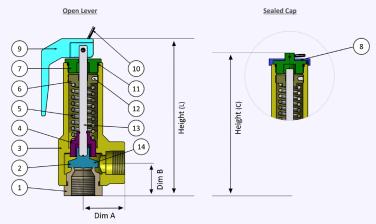

Size (Inlet x Outlet)	Dim A mm (inches)	Dim B mm (inches)	Height (L) mm (inches)	Height (C) mm (inches)
DN15 (½")	33.0 (1.29)	26.0 (1.02)	124.0 (4.88)	114.5 (4.51)
DN20 (¾")	37.0 (1.46)	32.0 (1.26)	130.0 (5.12)	120.5 (4.74)
DN25 (1")	42.0 (1.65)	37.0 (1.46)	156.0 (6.14)	146.5 (5.77)
DN32 (1 ¼")	50.0 (1.97)	42.0 (1.65)	174.0 (6.85)	164.5 (6.48)
DN40 (1 ½")	59.0 (2.32)	50.0 (1.97)	222.5 (8.76))	211.5 (8.33)
DN50 (2")	69.0 (2.72)	59.0 (2.32)	256.5 (9.70)	246.5 (9.70)
DN65 (2 ½")	78.0 (3.07)	83.5 (3.28)	320 (12.60)	310 (12.20)

Standards & Approvals

Name	Region	Logo	Description
PED	EU	Œ	PED approved to Category 4, Modules B and D (by TUV & Lloyds) In accordance with BS EN ISO 4126, CE-Marked as standard.
EAC	Russia, Belarus & Kazakhstan	ERE	EAC Customs Union Declaration TR TS 010-2011 & EAC Customs Union Certificate of Conformity TR TS 032-2013.
KUKReg 4	UK	kiwa	Regulation 4(1)a of the Water Supply (Water Fittings) Regulations 1999 England & Wales: 2009 Northern Ireland and 2014 Byelaws Scotland.
WRAS	UK	WRAS APPROVED PRODUCT	WRAS approved, meeting the requirements of the UK Water Supply Regulations.



RETURN TO CONTENTS PAGE

Discharge Capacities



Discharge ca	Discharge capacity for <u>WATER</u> at 10% over-pressure ^{1,2}											Kd	ir = 0.26
	DN In	15mr	n (½")	20mn	n (¾")	25mr	m (1")	32mm	(1¼")	40mm	ı (1½")	50mr	m (2")
Valve size	DN Out	15mr	n (½")	20mn	n (¾")	25mr	m (1")	32mm	(1¼")	40mm	1 (1½")	50mr	m (2")
	d _o (mm)	13	3.5	1	5			2			2	4	10
Set pressure (bar g.)	Set pressure (psi g.)	kg/hr	GPM (US)	kg/hr	GPM (US)	kg/hr	GPM (US)	kg/hr	GPM (US)	kg/hr	GPM (US)	kg/hr	GPM (US)
0.2	2.9	849.7	3.7	1097.2	4.8	1950.6	8.6	3047.8	13.4	4993.4	22.0	7802.3	34.4
1.0	14.5	1899.9	8.4	2453.4	10.8	4361.6	19.2	6815.0	30.0	11165.7	49.2	17446.4	76.9
2.0	29.0	2686.9	11.8	3469.6	15.3	6168.2	27.2	9637.9	42.5	15790.7	69.6	24672.9	108.8
4.0	58.0	3799.8	16.8	4906.8	21.6	8723.2	38.5	13630.0	60.1	22331.4	98.5	34892.8	153.8
6.0	87.0	4653.8	20.5	6009.6	26.5	10683.7	47.1	16693.3	73.6	27350.2	120.6	42734.7	188.4
8.0	116.0	5373.8	23.7	6939.3	30.6	12336.5	54.4	19275.7	85.0	31581.3	139.2	49345.8	217.6
10.0	145.0	6008.0	26.5	7758.3	34.2	13792.6	60.8	21550.9	95.0	35309.0	155.7	55170.3	243.3
12.0	174.0	6581.5	29.0	8498.8	37.5	15109.0	66.6	23607.8	104.1	38679.1	170.5	60436.0	266.5
15.0	217.5	7358.3	32.4	9502.0	41.9	16892.4	74.5	26394.4	116.4	43244.5	190.7	67569.6	297.9
20.0	290.0	8496.7	37.5	10971.9	48.4	19505.7	86.0	30477.6	134.4	49934.5	220.2	78022.6	344.0
24.0	348.0	9307.6	41.0	12019.1	53.0	21367.4	94.2	33386.5	147.2	54700.5	241.2	85469.5	376.9

¹ Metric units are calculated to 85 EN ISO4126-7:2013 and displayed in their customary units ² Imperial units are calculated to ASME Section VIII Division 1 and displayed in their customary units

Discharge c	apacity for Ho	OT WATER	at 10% ov	er-pressu	re (Unven	ted Syster	ns)¹					Ko	dr = 0.38
	DN In	DN In 15mm (½")		20mr	20mm (¾")		25mm (1")		32mm (1¼")		n (1½")	50mm (2")	
Valve size	DN Out	15mn	n (½")	20mr	n (¾")	25m	m (1")	32mm	n (1¼")	40mm	า (1½")	50mi	m (2")
	d _o (mm)	13	3.5	1	15		20	2	5	3	32	4	10
Set pressure (bar g.)	Set pressure (psi g.)	kW	BTU/sec	kW	BTU/sec	kW	BTU/sec	kW	BTU/sec	kW	BTU/sec	kW	BTU/sec
0.2	2.9	21.1	20.0	27.2	25.8	48.4	45.9	75.7	71.7	124.0	117.5	193.7	183.6
1.0	14.5	36.2	34.3	46.7	44.2	83.0	78.7	129.7	122.9	212.5	201.4	332.0	314.6
2.0	29.0	55.0	52.1	71.0	67.3	126.2	119.6	197.2	186.9	323.1	306.2	504.8	478.4
4.0	58.0	92.6	87.8	119.6	113.3	212.6	201.5	332.2	314.9	544.3	515.9	850.4	806.0
6.0	87.0	130.2	123.5	168.2	159.4	299.0	283.4	467.2	442.8	765.5	725.5	1196.0	1133.6
8.0	116.0	167.9	159.1	216.8	205.5	385.4	365.3	602.2	570.8	986.7	935.2	1541.7	1461.2
10.0	145.0	205.5	194.8	265.4	251.6	471.8	447.2	737.2	698.8	1207.9	1144.8	1887.3	1788.8
12.0	174.0	243.2	230.5	314.0	297.6	558.2	529.1	872.2	826.7	1429.1	1354.5	2232.9	2116.4
15.0	217.5	299.6	284.0	386.9	366.7	687.8	652.0	1074.8	1018.7	1760.9	1669.0	2751.4	2607.8
20.0	290.0	393.7	373.2	508.4	481.9	903.9	856.7	1412.3	1338.6	2313.9	2193.1	3615.5	3426.8
24.0	348.0	469.0	444.5	605.6	574.0	1076.7	1020.5	1682.3	1594.5	2756.3	2612.5	4306.7	4082.0

¹ Calculations based on Hot Water at or above 100°C, using the Kdr of Gas ² Calculations are in accordance to BS EN ISO 4126-1:2004 National Annex NA

	DN In	15mr	n (½")	20mm (¾")		25mi	25mm (1")		32mm (1¼")		40mm (1½")		50mm (2")	
Valve size	DN Out	15mr	n (½")	20mn	n (¾")	25m	n (1")	32mm	n (1¼")	40mm	1 (1½")	50mr	m (2")	
	d₀ (mm)	13	3.5	1	5	2	.0	2	5	3	2	4	10	
Set pressure (bar g.)	Set pressure (psi g.)		SCFM	I/sec	SCFM	I/sec	SCFM	I/sec	SCFM		SCFM	I/sec	SCFM	
0.2	2.9	12.5	26.5	16.1	34.2	28.6	60.7	44.7	94.9	73.2	155.5	114.4	243.0	
1.0	14.5	21.4	45.3	27.6	58.6	49.0	104.1	76.6	162.7	125.5	266.5	196.1	416.4	
2.0	29.0	32.5	69.0	41.9	89.0	74.5	158.3	116.5	247.3	190.8	405.2	298.2	633.2	
4.0	58.0	54.7	116.2	70.6	150.0	125.6	266.7	196.2	416.7	321.5	682.7	502.3	1066.7	
6.0	87.0	76.9	163.4	99.3	211.0	176.6	375.1	276.0	586.0	452.1	960.1	706.5	1500.2	
8.0	116.0	99.2	210.6	128.1	271.9	227.7	483.4	355.7	755.4	582.8	1237.6	910.6	1933.7	
10.0	145.0	121.4	257.8	156.8	332.9	278.7	591.8	435.5	924.7	713.5	1515.0	1114.8	2367.3	
12.0	174.0	143.6	305.0	185.5	393.9	329.7	700.2	515.2	1094.1	844.1	1792.5	1318.9	2800.8	
15.0	217.5	177.0	375.8	228.5	485.3	406.3	862.8	634.8	1348.1	1040.1	2208.7	1625.2	3451.1	
20.0	290.0	290.0	493.8	300.3	637.7	533.9	1133.7	834.2	1771.4	1366.8	2902.3	2135.6	4534.9	
24.0	348.0	277.0	588.3	357.7	759.6	636.0	1350.5	993.7	2110.1	1628.1	3457.2	2543.9	5401.9	

Metric units are calculated to BS EN ISO4126-7:2013 and converted to I/sec at 1.013 bar a. @ 15°C
 Imperial units are calculated to ASME Section VIII Division 1 and displayed in their customary units
 To convert from I/sec (1.013 bar a. @ 15°C) to Nm3/hr (1.013 bar a. @ 0°C) multiply by 3.413

	DNIIn	15 00 0	m (½")	20,000	~ /3/"\	25.00	on (1")	22,000	. /11/"\	40,000	. /11/"\	F0	~ (2"\
	DN In				n (¾")		n (1")		1 (1¼")		1 (1½")		m (2")
Valve size	DN Out	15mr	n (½")	20mr	n (¾")	25mi	m (1")	32mm	1 (1¼")	40mm	ı (1½")	50mi	m (2")
	d₀ (mm)	13	3.5	1	.5	2	20	2	.5	3	2	40 (mm)
Set pressure (bar g.)	Set pressure (psi g.)	kg/hr	lb/hr	kg/hr	lb/hr	kg/hr	lb/hr	kg/hr	lb/hr	kg/hr	lb/hr	kg/hr	lb/hr
0.2	2.9	29.1	74.2	37.6	95.8	66.9	170.4	104.5	266.2	171.3	436.2	267.6	681.6
1.0	14.5	59.7	127.2	77.1	164.2	137.0	292.0	214.1	456.2	350.8	747.5	548.1	1167.9
2.0	29.0	89.7	193.4	115.8	249.7	205.9	444.0	321.7	693.7	527.1	1136.6	823.6	1775.9
4.0	58.0	148.8	325.8	192.1	420.7	341.5	748.0	533.7	1168.7	874.4	1914.8	1366.2	2991.9
6.0	87.0	207.3	458.2	267.6	591.7	475.8	1052.0	743.4	1643.7	1218.0	2693.0	1903.1	4207.9
8.0	116.0	265.4	590.7	342.7	762.7	609.2	1356.0	951.9	2118.7	1559.5	3471.3	2436.8	5423.8
10.0	145.0	323.3	723.1	417.5	933.7	742.3	1660.0	1159.8	2593.7	1900.3	4249.5	2969.2	6639.8
12.0	174.0	381.1	855.5	492.1	1104.7	874.8	1963.9	1366.9	3068.7	2239.5	5027.7	3499.2	7855.8
14.0	203.0	438.9	987.9	566.7	1275.7	1007.5	2267.9	1574.2	3543.7	2579.2	5805.9	4030.0	9071.8

Metric units are calculated to BS EN ISO4126-7:2013 and displayed in their customary units
Imperial units are calculated to ASME Section VIII Division 1 and displayed in their customary units
Calculations for saturated steam only
PTFE seals up to 14 bar g., EPDM seals up to 2.5 bar g. - contact Seetru for details on maximum steam pressure for other seal materials



Seetru Limited

Open Lever / Sealed Cap

hot water

compressed air & gas



Safety valves made from Brass < Enclosed discharge with threaded connections <

Features

- Bronze body with dezincification resistant brass wetted parts; stainless steel spring, spindle and seal retainer
- Size range DN15 to DN50 (½" BSP to 2" BSP)
- Pressure Range: 0.2 to 24 bar g. (steam up to 14 bar g. with PTFE seals, contact Seetru for information on other seals)
- Temperature Range:-60°C to +200°C (with PTFE seals (EPDM-45°C to +140°C)
- Degrease for oxygen available on request
- PTFE or EPDM sealing as standard (other seal materials available upon request)
- Easy to fit spares kit
- Self-draining design
- Adaptors available to give male connections
- Open Lever or Sealed Cap
- Designed in accordance with the requirements of BS EN ISO 4126 Part 1 and CE marked as a Category IV Safety Accessory
- WRAS approval
- Available for quick delivery using our Same Day Despatch Service SAME DAY DESPATCH

- · Supplied with Declaration of conformity, EN 10204 3.1 material certification available on request
- Test certificate supplied free of charge

Applications

- Hot water, including boilers (vented and unvented)
- Steam boilers and steam plants
- Pump and thermal relief
- Bypass relief
- Process liquids and gases
- Pressure vessels and lines


- Heating and cooling systems
- · Heat exchangers and industrial cooling systems
- Refrigeration systems
- Pressure booster systems
- Solar power systems
- District heating systems

- Water supply systems
- · Sewage systems
- Pressure control and regulation
- Chemical plants
- District heating systems
- Ship building and marine applications

Materials of Construction

	COMPONENT	MATERIAL					
1	Seat	Dezincification Resistant Material					
	Lift Aid Assembly	Dezincification Resistant Material					
3	Body	Bronze CC491K / C83600					
	Piston	Dezincification Resistant Material					
	Spring	Steel 1.4401					
	Adjuster	Brass					
7	Сар	Brass					
8	Cover	Brass					
9	Lever	Brass					
10	Wire Lock	Steel & Lead					
11	O-Ring	EPDM					
12	Locking Slug	Nylon					
13	Spindle	Stainless Steel					
14	Seal	PTEF or EPDM					

Dimensional Drawing

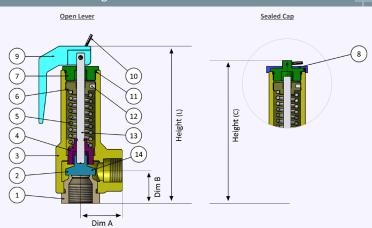

Size (Inlet x Outlet)	Dim A mm (inches)	Dim B mm (inches)	Height (L)	Height (C)	
DN15 (½") x DN20 (¾")	37.0 (1.46)	32.0 (1.26)	130.0 (5.12)	120.5 (4.74)	
DN20 (¾") x DN25 (1")	42.0 (1.65)	37.0 (1.46)	156.0 (6.14)	146.5 (5.77)	
DN25 (1") x DN32(1 ¼")	50.0 (1.97)	42.0 (1.65)	174.0 (6.85)	164.5 (6.48)	
DN32 (1 ¼") x DN40 (1 ½")	59.0 (2.32)	50.0 (1.97)	222.5 (8.76)	211.5 (8.33)	
DN40 (1 ½") x DN50 (2")	69.0 (2.72)	59.0 (2.32)	256.5 (9.70)	246.5 (9.70)	
DN50 (2") x DN65 (2 ½")	78 (3.07)	83.5 (3.28)	320.0 (12.60)	310 (12.20)	

Standards & Approvals

o carraar ar	o a		十二				
Name	Region	Logo	Description				
PED	EU	Œ	PED approved to Category 4, Modules B and D (by TUV & Lloyds) In accordance with BS EN ISO 4126, CE-Marked as standard.				
EAC	Russia, Belarus & Kazakhstan	EHC	EAC Customs Union Declaration TR TS 010-2011 & EAC Customs Union Certificate of Conformity TR TS 032-2013.				
KUKReg 4	UK	kiwa	Regulation 4(1)a of the Water Supply (Water Fittings) Regulations 1999 England & Wales: 2009 Northern Ireland and 2014 Byelaws Scotland.				
WRAS	UK	WRAS APPROVED PRODUCT	WRAS approved, meeting the requirements of the UK Water Supply Regulations.				



RETURN TO CONTENTS PAGE

Discharge Capacities

LGS HI-FLOW Safety Relief Valves



HI-FLOW Di	HI-FLOW Discharge capacity for <u>WATER</u> at 10% over-pressure ^{1,2} Kdr = 0.26												
	DN In	15mn	า (½")	20mr	n (¾")	25mr	n (1")	32mm	n (1¼")	40mm	1 (1½")		
Valve size	DN Out	20mn	า (¾")	25mr	n (1")	32mm	ı (1¼")	40mm (1½")		50mm (2") 40			
	d _o (mm)		5	20		2	.5	3	2				
Set pressure (bar g.)	Set pressure (psi g.)	kg/hr	GPM (US)	kg/hr GPM (US)		kg/hr	GPM (US)	kg/hr	GPM (US)	kg/hr	GPM (US)		
0.2	2.9	1097.2	4.8	1950.6	8.6	3047.8	13.4	4993.4	22.0	7802.3	34.4		
1.0	14.5	2453.4	10.8	4361.6	19.2	6815.0	30.0	11165.7	49.2	17446.4	76.9		
2.0	29.0	3469.6	15.3	6168.2	27.2	9637.9	42.5	15790.7	69.6	24672.9	108.8		
4.0	58.0	4906.8	21.6	8723.2	38.5	13630.0	60.1	22331.4	98.5	34892.8	153.8		
6.0	87.0	6009.6	26.5	10683.7	47.1	16693.3	73.6	27350.2	120.6	42734.7	188.4		
8.0	116.0	6939.3	30.6	12336.5	54.4	19275.7	85.0	31581.3	139.2	49345.8	217.6		
10.0	145.0	7758.3	34.2	13792.6	60.8	21550.9	95.0	35309.0	155.7	55170.3	243.3		
12.0	174.0	8498.8	37.5	15109.0	66.6	23607.8	104.1	38679.1	170.5	60436.0	266.5		
15.0	217.5	9502.0	41.9	16892.4	74.5	26394.4	116.4	43244.5	190.7	67569.6	297.9		
20.0	290.0	10971.9	48.4	19505.7	86.0	30477.6	134.4	49934.5	220.2	78022.6	344.0		
24.0	348.0	12019.1	53.0	21367.4	94.2	33386.5	147.2	54700.5	241.2	85469.5	376.9		

Metric units are calculated to BS EN ISO4126-7:2013 and displayed in their customary units
 Imperial units are calculated to ASME Section VIII Division 1 and displayed in their customary units

DN In		15mr	n (½")	20mm (¾")		25mm (1")		32mm (1¼")		40mm (1½")	
Valve size	DN Out	20mr	n (¾")	25mr	n (1")	32mm (1¼")		40mm (1½")		50mm (2") 40	
	d _o (mm)	1	.5	20 25		.5	3	2			
Set pressure (bar g.)	Set pressure (psi g.)	kW	BTU/sec	kW	BTU/sec	kW	BTU/sec	kW	BTU/sec	kW	BTU/sec
0.2	2.9	27.2	25.8	48.4	45.9	75.7	71.7	124.0	117.5	193.7	183.6
1.0	14.5	46.7	44.2	83.0	78.7	129.7	122.9	212.5	201.4	332.0	314.6
2.0	29.0	71.0	67.3	126.2	119.6	197.2	186.9	323.1	306.2	504.8	478.4
4.0	58.0	119.6	113.3	212.6	201.5	332.2	314.9	544.3	515.9	850.4	806.0
6.0	87.0	168.2	159.4	299.0	283.4	467.2	442.8	765.5	725.5	1196.0	1133.6
8.0	116.0	216.8	205.5	385.4	365.3	602.2	570.8	986.7	935.2	1541.7	1461.2
10.0	145.0	265.4	251.6	471.8	447.2	737.2	698.8	1207.9	1144.8	1887.3	1788.8
12.0	174.0	314.0	297.6	558.2	529.1	872.2	826.7	1429.1	1354.5	2232.9	2116.4
15.0	217.5	386.9	366.7	687.8	652.0	1074.8	1018.7	1760.9	1669.0	2751.4	2607.8
20.0	290.0	508.4	481.9	903.9	856.7	1412.3	1338.6	2313.9	2193.1	3615.5	3426.8
24.0	348.0	605.6	574.0	1076.7	1020.5	1682.3	1594.5	2756.3	2612.5	4306.7	4082.0

¹ Calculations based on Hot Water at or above 100°C, using the Kdr of Gas ² Calculations are in accordance to BS EN ISO 4126-1:2004 National Annex NA

87.0

HI-FLOW Discharge capacity for <u>AIR</u> at 10% over-pressure ^{1,2,3} Kdr = 0.38												
	DN In	15mn	n (½")	20mr	n (¾")	25mr	n (1")	32mm	1 (1¼")	40mm	(1½")	
Valve size	DN Out	20mm (¾")		25mm (1")		32mm (1¼")		40mm (1½")		50mm (2")		
	d₀(mm)	1	5	2	20	2	.5	3	2	40		
Set pressure (bar g.)	Set pressure (psi g.)		SCFM	I/sec	SCFM	I/sec	SCFM	I/sec	SCFM		SCFM	
0.2	2.9	16.1	34.2	28.6	60.7	44.7	94.9	73.2	155.5	114.4	243.0	
1.0	14.5	27.6	58.6	49.0	104.1	76.6	162.7	125.5	266.5	196.1	416.4	
2.0	29.0	41.9	89.0	74.5	158.3	116.5	247.3	190.8	405.2	298.2	633.2	
4.0	58.0	70.6	150.0	125.6	266.7	196.2	416.7	321.5	682.7	502.3	1066.7	

375.1

276.0

586.0

452.1

960.1

8.0	116.0	128.1	271.9	227.7	483.4	355.7	755.4	582.8	1237.6	910.6	1933.7
10.0	145.0	156.8	332.9	278.7	591.8	435.5	924.7	713.5	1515.0	1114.8	2367.3
12.0	174.0	185.5	393.9	329.7	700.2	515.2	1094.1	844.1	1792.5	1318.9	2800.8
15.0	217.5	228.5	485.3	406.3	862.8	634.8	1348.1	1040.1	2208.7	1625.2	3451.1
20.0	290.0	300.3	637.7	533.9	1133.7	834.2	1771.4	1366.8	2902.3	2135.6	4534.9
24.0	348.0	357.7	759.6	636.0	1350.5	993.7	2110.1	1628.1	3457.2	2543.9	5401.9
1 Metric units are calculated to BS EN ISO4126-7:2013 and converted to I/sec at 1.013 bar a. @ 15°C											

176.6

99.3

211.0

² Imperial units are calculated to ASME Section VIII Division 1 and displayed in their customary units ³ To convert from I/sec (1.013 bar a. @ 15°C) to Nm3/hr (1.013 bar a. @ 0°C) multiply by 3.413

	DN In		n (½")	· ·	20mm (¾")		n (1")	32mm (1½") 40mm (1½")		40mm (1½")	
Valve size	DN Out d _o (mm)		n (¾") .5	25mm (1") 20		32mm 2	5 (1¼")	40mm 3		50mm (2") 40	
Set pressure (bar g.)	Set pressure (psi g.)	kg/hr	lb/hr	kg/hr	lb/hr	kg/hr	lb/hr	kg/hr	lb/hr	kg/hr	lb/hr
0.2	2.9	37.6	95.8	66.9	170.4	104.5	266.2	171.3	436.2	267.6	681.6
1.0	14.5	77.1	164.2	137.0	292.0	214.1	456.2	350.8	747.5	548.1	1167.9
2.0	29.0	115.8	249.7	205.9	444.0	321.7	693.7	527.1	1136.6	823.6	1775.9
4.0	58.0	192.1	420.7	341.5	748.0	533.7	1168.7	874.4	1914.8	1366.2	2991.9
6.0	87.0	267.6	591.7	475.8	1052.0	743.4	1643.7	1218.0	2693.0	1903.1	4207.9
8.0	116.0	342.7	762.7	609.2	1356.0	951.9	2118.7	1559.5	3471.3	2436.8	5423.8
10.0	145.0	417.5	933.7	742.3	1660.0	1159.8	2593.7	1900.3	4249.5	2969.2	6639.8
12.0	174.0	492.1	1104.7	874.8	1963.9	1366.9	3068.7	2239.5	5027.7	3499.2	7855.8
14.0	217.5	566.7	1275.7	1007.5	2267.9	1574.2	3543.7	2579.2	5805.9	4030.0	9071.8

6.0

¹ Metric units are calculated to BS EN ISO4126-7:2013 and displayed in their customary units
² Imperial units are calculated to ASME Section VIII Division 1 and displayed in their customary units
³ Calculations for saturated steam only
⁴ PTFE seals up to 14 bar g, EPDM seals up to 2.5 bar g. - contact Seetru for details on maximum steam pressure for other seal materials



1500.2

706.5

for compressed air or gases

Seetru Limited

Type 636 / 631

Safety valves with bronze body < Enclosed discharge valve with threaded connections <


Example Applications

- Air / gas compressors
- Pressure vessels
- Pneumatic systems
- Medical gases
- Technical gases

Specifications

- Inlet connections: 3/8" to 2" (depending on bore size)
- Temperature:-40°C to +200°C (depending on seal material)
- Pressure range: 0.32 to 55.2 barg (depending on bore size)

Materials of Construction

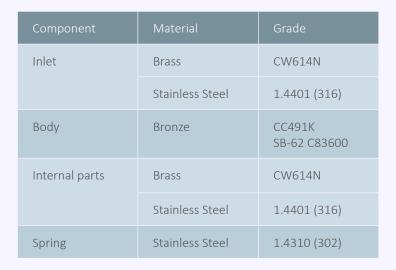



Approvals

- TÜV Type test approval 728 (10mm nominal bore)
- TÜV Type test approval 761 (13mm nominal bore)
- TÜV Type test approval 916 (18mm nominal bore)
- TÜV Type test approval 892 (20mm nominal bore)
- TÜV Type test approval 830 (25mm nominal bore)
- Designed in accordance with BS EN SO 4126-1.
- PED 2014/68/EU
- A.S.M.E. Boiler & Pressure Vessel code section VIII for air/gas
- EAC






Seal Materials

Seal Material	Temperature Range
Viton® (FKM)	-15°C to +200°C
Nitrile (NBR)	-40°C to +120°C

Standard seal materials shown, others are available.

Easing Gear / Lifting Gear Options

Standard option: Rota-lift, twist type (not gas tight)



Other Options:



Sealed Cap (gas tight cap)



Unsealed lever (not gas tight)



Sealed lever (gas tight)



RETURN TO CONTENTS PAGE

	_
	_
	_

Bore size	٥	9.5/10mm			13.7mm			17mm			20mm			25mm	
Inlet Size	3/8"	1/2"	3/4"	1/2"	3/4"	1"	1"	1 1/4"	1 1/2"	1"	1 1/4"	1 1/2"	1 1/4"	1 1/2"	2"
Outlet Size	3/4"		1"			1 1/2"		2"			2"				
Flow Area	70.9mm² (above 1.55 barg)				147.7mm²		227mm²			314mm²			490.4mm²		
H - Height (Rota-lift cap version)		102mm (up to 33 bar) 116mm (33-55.2 bar)			m (up to 3 mm (35-4		204mm			227mm		252mm			
TÜV alloted outflow coefficient	0.78				0.71			(1.0 to 2.4 (2.4 to 35.0		0.76 (3.0 to 22.0 bar) 0.80 (22.0 to 35.0 bar)			0.85		
NB Certified rated slope (ASME)	1.7	74 scfm/ps	ia	3.4	47 scfm/ps	sia	5.6	5.60 scfm/psia 7.77 scfm/psia			12.26 scfm/psia		sia		
Weight (approximate) Kg		0.8			1.1		3.6 4.0			5.1					
Set Pressure range - PED (CE) Bar g	0	.48 to 55.2	!	C).32 to 49.	0		1.0 to 35.0)		3.0 to 35.0)		5.65 to 30.0)
Set Pressure range - ASME (UV) psi g	22	2.5 to 800.	4	2	0.3 to 710	.5	34	4.8 to 507	.5	4	3.5 to 507	.5	8	2.0 to 435.0	0
Relieving pressure/fully open pressure							Set F	Pressure +	10%						
Reseating pressure	Set Pressure -10% (0.3 Bar g minimum)														

Maximum permissible built up back pressure = 10% of set pressure at or below which flow is not reduced. Stable operation on flows down to 50% of valve rated capacity.

Standard Thread Connection Types



- BSP Parallel male thread
- BSP Taper male thread
- NPT male thread

Standard Outlet Connection Types



- BSP Parallel female thread
- NPT female thread

Valve Selection Guide

636 (Brass inlet)

656 (St. Steel inlet

631 (Brass inlet)

651

(St. Steel inlet



			INLET TH	IREAD
Thread Type	Outlet Thread Type	Easing Gear	Seal Material	
			Viton® (FKM)	
Select Inlet thread type	Select Outlet thread type	Select easing gear/top fitting	Nitrile (NRB)	

Valves with Rota-lift Easing Gear

EAC marking available upon request

PED (CE)

PED (CE), ASME (UV) & CR

Select bore size from above table

Select inlet size

from above table

Example of Valve Selection Process



Other

Н

Example	CE/PED	636	20	1 1/2"	BSP Taper	BSP parallel	Rota-lift	Viton	10.5 barg
Selection	Approval	Valve Type	Bore = 20mm	Inlet Size	Inlet Thread Type	Outlet Thread Type	Easing Gear	Seal	Set Pressure



RETURN TO CONTENTS PAGE

^{*}Please send your selected details to Seetru and we can provide the full ordering code, price and lead-time.

Capacity Table - In accordance with **TÜV**, AIR at 0°C and 1013mbar. Normal m³/hour Type 636/656: Flow rates at 10% above the set pressure



Cat Duassum		Bore Size (D0)				
Set Pressure		9.5mm	13.7mm	17mm	20mm	25mm
Bar g	Psi g	Nm³/Hour	Nm³/Hour	Nm³/Hour	Nm³/Hour	Nm³/Hour
0.32	4.64		114.2			
0.48	6.96	48.9	124.5			
	14.5	76.9	164.9	241.8		
2	29	121.0	229.1	367.6		
3	43.5	162.4	307.5	560.2	701.4	
4	58	203.8	385.9	703.0	880.3	
5	72.5	245.3	464.3	845.9	1059.2	
5.65	81.93	272.2	515.3	938.7	1175.5	2054.3
6	87	286.7	542.7	988.7	1238.2	2163.7
7	101.5	328.1	621.2	1131.6	1417.0	2476.4
8	116	369.5	699.6	1274.5	1596.0	2789.0
9	130.5	410.9	778.0	1417.3	1774.9	3101.7
10	145	452.4	856.4	1560.2	1953.8	3414.3
15	217.5	659.5	1248.5	2274.5	2848.2	4977.5
20	290	866.6	1640.6	2988.7	3742.8	6540.7
25	362.5	1073.8	2032.7	3703.0	4881.2	8103.9
30	435	1280.9	2424.8	4417.3	5823.0	9667.1
35	507.5	1488.1	2816.9	5131.6	6764.6	
40	580	1695.2	3209.0			
45	652.5	1902.3	3601.1			
49	710.5	2068.0	3914.8			
50	725	2109.4				
55.2	800.4	2324.8				

For any intermediate pressures/flows please contact Seetru

Capacity Table - In accordance ASME section VIII Div I, AIR at 60°F and 14.7 psia/scfm. SCFM Type 631/651: Flow rates at 10% above the set pressure



	Sat Prassura	Bore Size (D0)				
Set Pressure		9.5mm	13.7mm	17mm	20mm	25mm
Psi g	Barg	SCFM	SCFM	SCFM	SCFM	SCFM
20.3	1.40		131.9			
22.5	2.50	68.7	139.4			
30	2.07	81.5	165.5			
34.8	2.80	90.6	183.8	296.7		
40	2.76	100.4	203.7	328.7		
43.5	3.00	106.9	217.0	350.2	486.0	
50	3.45	119.2	241.8	390.3	541.5	
82	5.66	179.3	363.9	587.3	814.9	1285.8
100	6.90	213.2	432.6	698.1	968.7	1528.4
150	10.34	307.2	623.4	1006.1	1395.9	2202.6
200	13.79	401.2	814.2	1314.0	1823.2	2876.8
250	17.24	495.3	1005.0	1621.9	2250.4	3550.8
300	20.69	589.3	1195.8	1929.8	2677.6	4224.9
350	24.14	683.3	1386.6	2237.8	3104.9	4899.1
400	27.59	777.4	1577.4	2545.7	3532.2	5573.3
435	30.00	843.2	1711.0	2761.2	3831.2	6045.2
450	31.03	871.4	1768.2	2853.6	3959.3	
500	34.48	965.4	1959.0	3161.5	4386.6	
507.5	35.00	979.5	1987.6	3207.7	4450.7	
550	37.93	1059.4	2149.8			
600	41.38	1153.4	2340.6			
650	44.83	1247.5	2531.4			
700	48.28	1341.5	2722.2			
710.5	49.00	1361.3	2762.3			
750	51.72	1435.5				
800.4	55.20	1530.3				



Seetru Limited

for compressed air or gases

Type 646 / 641

Safety valves with Stainless Steel body < Enclosed discharge valve with threaded connections <

Example Applications



- Pressure vessels
- Pneumatic systems
- Medical gases
- Technical gases

Specifications

- Inlet connections: 3/8" to 2" (depending on bore size)
- Temperature:-40°C to +200°C (depending on seal material)
- Pressure range: 0.32 to 55.2 barg (depending on bore size)

Materials of Construction

Component	Material	Grade
Inlet	Stainless Steel	1.4401 (316)
Body	Stainless Steel	1.4408 (316)
Internal Parts	Stainless Steel	1.4401 (316)
Spring	Stainless Steel	1.4310 (302)



Approvals

- TÜV Type test approval 728 (10mm nominal bore)
- TÜV Type test approval 761 (13mm nominal bore)
- TÜV Type test approval 916 (18mm nominal bore)
- TÜV Type test approval 892 (20mm nominal bore)
- TÜV Type test approval 830 (25mm nominal bore)
- Designed in accordance with BS EN SO 4126-1.
- PED 2014/68/EU
- A.S.M.E. Boiler & Pressure Vessel code section VIII for air/gas
- CRN
- EAC



Seal Materials

Seal Material	Temperature Range
Viton® (FKM)	-15°C to +200°C
Nitrile (NBR)	-40°C to +120°C

Standard seal materials shown, others are available.

Easing Gear / Lifting Gear Options

• **Standard option**: Rota-lift cap, twist type (not gas tight)



Other Options:



Sealed Cap (gas tight cap)



Sealed lever (gas tight)



Bore size	9.5/10mm			13.7mm		17mm			20mm		25mm				
Inlet Size	3/8"	1/2"	3/4"	1/2"	3/4"	1"	1"	1 1/4"	1 1/2"	1"	1 1/4"	1 1/2"	1 1/4"	1 1/2"	2"
Outlet Size		3/4"			1"			1 1/2"			2"		2"		
Flow Area		70.9mm² ove 1.55 ba	rg)	147.7mm²		227mm²		314mm²		490.4mm²					
H - Height (Rota-lift cap version)	116mm		143mm (up to 35 bar) 172.5mm (35-49 bar)		211mm		227mm		252mm						
TÜV alloted outflow coefficient	0.78		0.71		0.74 (1.0 to 2.4 bar) 0.84 (2.4 to 35.0 bar)		0.76 (3.0 to 22.0 bar) 0.80 (22.0 to 35.0 bar)		0.85						
NB Certified rated slope (ASME)	1.	74 scfm/ps	sia	3.47 scfm/psia		5.60 scfm/psia		7.77 scfm/psia		12.26 scfm/psia					
Weight (approximate) Kg		0.8		1.1		3.6		4.0		5.1					
Set Pressure range - PED (CE) Bar g	С	.48 to 55.2	2	0.32 to 49.0		1.0 to 35.0		3.0 to 35.0		5.65 to 30.0)			
Set Pressure range - ASME (UV) psi g	22.5 to 800.4		20.3 to 710.5		34.8 to 507.5		43.5 to 507.5		82.0 to 435.0		0				
Relieving pressure/fully open pressure	Set Pressure +10%														
Reseating pressure							Set F	ressure +	10%						

Maximum permissible built up back pressure = 10% of set pressure at or below which flow is not reduced. Stable operation on flows down to 50% of valve rated capacity.

Standard Thread Connection Types




- BSP Parallel male thread
- BSP Taper male thread
- NPT male thread

Standard Outlet Connection Types



- BSP Parallel female thread
- NPT female thread

Valves with Rota-lift Easing Gear



INLET THREAD

Valve Selection Guide



Approval Required	Valve type	Select Bore	Inlet Size	Inlet Thread Type	Outlet Thread Type	Easing Gear	Seal Material
PED (CE)	646	Select bore size	61		Select Outlet	Select easing gear/top fitting	Viton® (FKM)
PED (CE), ASME		from above table	Select inlet size from above table	Select Inlet thread type	thread type		Nitrile (NRB)
(UV) & CRN	641						Other

EAC marking available upon request



Example	PED, ASME & CRN	641	20	1 1/2"	BSP Taper	BSP parallel	Rota-lift	Viton	10.5 barg
Selection	Approval	Valve Type	Bore = 20mm	Inlet Size	Inlet Thread Type	Outlet Thread Type	Easing Gear	Seal	Set Pressure



^{*}Please send your selected details to Seetru and we can provide the full ordering code, price and lead-time.

Capacity Table - In accordance with TÜV, AIR at 0°C and 1013mbar. Normal m³/hour Type 646: Flow rates at 10% above the set pressure

4	

Cot Duoscuus	Set Pressure		Bore Size (D0)								
Set Flessure		9.5mm	13.7mm	17mm	20mm	25mm					
Bar g	Psi g	Nm³/Hour	Nm³/Hour	Nm³/Hour	Nm³/Hour	Nm³/Hour					
0.32	4.64		114.2								
0.48	6.96	48.9	124.5								
1	14.5	76.9	164.9	241.8							
2	29	121.0	229.1	367.6							
3	43.5	162.4	307.5	560.2	701.4						
4	58	203.8	385.9	703.0	880.3						
5	72.5	245.3	464.3	845.9	1059.2						
5.65	81.93	272.2	515.3	938.7	1175.5	2054.3					
6	87	286.7	542.7	988.7	1238.2	2163.7					
7	101.5	328.1	621.2	1131.6	1417.0	2476.4					
8	116	369.5	699.6	1274.5	1596.0	2789.0					
9	130.5	410.9	778.0	1417.3	1774.9	3101.7					
10	145	452.4	856.4	1560.2	1953.8	3414.3					
15	217.5	659.5	1248.5	2274.5	2848.2	4977.5					
20	290	866.6	1640.6	2988.7	3742.8	6540.7					
25	362.5	1073.8	2032.7	3703.0	4881.2	8103.9					
30	435	1280.9	2424.8	4417.3	5823.0	9667.1					
35	507.5	1488.1	2816.9	5131.6	6764.6						
40	580	1695.2	3209.0								
45	652.5	1902.3	3601.1								
49	710.5	2068.0	3914.8								
50	725	2109.4									
55.2	800.4	2324.8									

For any intermediate pressures/flows please contact Seetru

Capacity Table - In accordance ASME section VIII Div I, AIR at 60°F and 14.7 psia/scfm. SCFM Type 641: Flow rates at 10% above the set pressure



Set Pressure		Bore Size (D0)								
		9.5mm	13.7mm	17mm	20mm	25mm				
Psi g	Bar g	SCFM	SCFM	SCFM	SCFM	SCFM				
20.3	1.40		131.9							
22.5	2.50	68.7	139.4							
30	2.07	81.5	165.5							
34.8	2.80	90.6	183.8	296.7						
40	2.76	100.4	203.7	328.7						
43.5	3.00	106.9	217.0	350.2	486.0					
50	3.45	119.2	241.8	390.3	541.5					
82	5.66	179.3	363.9	587.3	814.9	1285.8				
100	6.90	213.2	432.6	698.1	968.7	1528.4				
150	10.34	307.2	623.4	1006.1	1395.9	2202.6				
200	13.79	401.2	814.2	1314.0	1823.2	2876.8				
250	17.24	495.3	1005.0	1621.9	2250.4	3550.8				
300	20.69	589.3	1195.8	1929.8	2677.6	4224.9				
350	24.14	683.3	1386.6	2237.8	3104.9	4899.1				
400	27.59	777.4	1577.4	2545.7	3532.2	5573.3				
435	30.00	843.2	1711.0	2761.2	3831.2	6045.2				
450	31.03	871.4	1768.2	2853.6	3959.3					
500	34.48	965.4	1959.0	3161.5	4386.6					
507.5	35.00	979.5	1987.6	3207.7	4450.7					
550	37.93	1059.4	2149.8							
600	41.38	1153.4	2340.6							
650	44.83	1247.5	2531.4							
700	48.28	1341.5	2722.2							
710.5	49.00	1361.3	2762.3							
750	51.72	1435.5								
800.4	55.20	1530.3								



Atmospheric Discharge Safety Relief Valves

Seetru Limited

for compressed air or gases

Type 63608

Safety valves with brass body and plastic outlet < Enclosed discharge valve with threaded connections <

Example Applications



- Pressure vessels
- Pneumatic systems
- Medical gases (non-flammable)
- Technical gases (non-flammable







Pressure range: 0.3 to 13.2 barg




Approvals

- TÜV Type test approval 925
- Designed in accordance with BS EN SO 4126-1.
- PED 2014/68/EU
- EAC



Materials of Construction

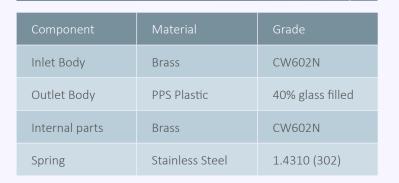

Seal Materials

Seal Material	Temperature Range
Viton® (FKM)	-15°C to +200°C
Nitrile (NBR)	-40°C to +120°C

Standard seal materials shown, others are available.

Easing Gear / Lifting Gear Options

Standard option – Rota-lift cap, twist type



/4

Bore size	7.9mm (63608)							
Inlet Size	1/4"	1/2"						
Outlet Size	3/8"							
Flow Area		49.02mm²						
H - Height (Rota-lift cap version)	57mm							
TÜV alloted outflow coefficient	0.5	46 from 0.3 to 0.8 ba 66 from 1.4 to 3.24 ba 3 from 3.24 to 13.2 b	ar.g					
Weight (approximate) Kg		0.5						
Set Pressure range - PED (CE) Bar g	0.3 to 13.2							
Relieving pressure/fully open pressure	Set pressure +10% (Below 1 bar.g = 0.1 bar.g)							
Reseating pressure	Set press	sure-10% (0.3 bar.g n	ninimum)					

Maximum permissible built up back pressure = 10% of set pressure at or below which flow is not reduced. Stable operation on flows down to 50% of valve rated capacity.


Standard Thread Connection Types

- BSP Parallel male thread
- BSP Taper male thread
- NPT male thread

Standard OUTLET Thread Connection Types

• BSP Parallel female thread

Valve Drawing

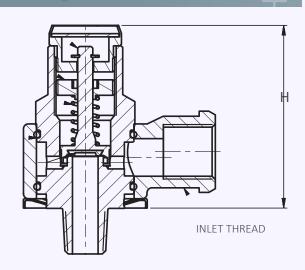

Valve Selection Guide

Approval Required	Valve type	Inlet Size	Inlet Thread Type	Outlet Thread Type	Easing Gear	Seal Material
					Select easing gear/top fitting	Viton® (FKM)
PED (CE)	63608	Select inlet size from above table	Select Inlet thread type	Select Outlet thread type		Nitrile (NBR)
						Other

EAC marking available upon request

*Please send your selected details to Seetru and we can provide the full ordering code, price and lead-time.





Capacity Table - In accordance with TÜV, AIR at 0°C and 1013mbar. Normal m³/hour Type 63608: Flow rates at 10% above the set pressure



Cat Division	×.	Bore Size (D0)		
Set Pressure		7.9mm		
Bar g	Psi g	Nm³/Hour		
0.3	4.35	20.6		
0.8	11.6	29.1		
1.4	20.3	47.7		
2	29	60.0		
3	43.5	80.6		
4	58	113.8		
5	72.50	137.0		
6	87	160.1		
7	101.5	183.2		
8	116	206.4		
9	130.5	229.5		
10	145	252.7		
13.2	191.4	326.6		



for compressed air or gases

Seetru Limited

Type 86810

Safety valves with brass body and plastic outlet < Enclosed discharge valve with threaded connections <

Example Applications

- Air / gas compressors (non-flammable)
- Pressure vessels
- Pneumatic systems
- Medical gases (non-flammable)
- Technical gases (non-flammable)



- Inlet connections: 1/2" to 3/4"
 Temperature:-15°C to +200°C
- Available Set Pressures: 7.0, 8.0, 9.3, 10.0, 10.5, 11.0, 11.5, 14.5 & 16.0 bar

Materials of Construction

Component	Material	Grade
Inlet Body	Brass	CZ121
Outlet Body	PPS Plastic	40% glass filled
Internal parts	Brass	CZ121
Spring	Stainless Steel	1.4310 (302)



Approvals

- TÜV Type test approval 962
- Designed in accordance with BS EN SO 4126-1.
- PED 2014/68/EU
- EAC

C€ [H[

Seal Materials

Seal Material	Temperature Range
Viton® (FKM)	-15°C to +200°C

Standard seal materials shown, others are available.

Easing Gear / Lifting Gear Options

• **Standard option** – Rota-lift cap, twist type (not gas tight)



Bore size	10.0mm (86810)					
Inlet Size	1/2" 3/4"					
Outlet Size	3/	' 4"				
Flow Area	78.5mm²					
H - Height (Rota-lift cap version)	84mm					
TÜV alloted outflow coefficient	0.78					
Weight (approximate) Kg	0.5					
Available Set Pressures Bar	7.0, 8.0, 9.3, 10.0, 10.5, 11.0, 11.5, 14.5 & 16.0					
Relieving pressure/fully open pressure	Set pressure +10%					
Reseating pressure	Set press	sure -10%				

Maximum permissible built up back pressure = 10% of set pressure at or below which flow is not reduced.


Standard Thread Connection Types



- BSP Parallel male thread
- BSP Taper male thread
- NPT male thread

Standard OUTLET Thread Connection Types


BSP Parallel female thread

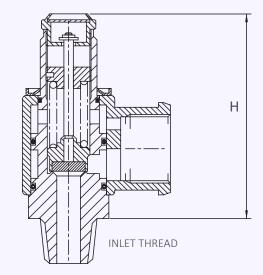

Valve Selection Guide

Approval Required	Valve type	Inlet Size	Inlet Thread Type	Outlet Thread Type	Easing Gear	Seal Material
PED (CE)	86810	Select inlet	Select Inlet	Select Outlet	Select easing	Viton® (FKM)
PED (CE)	86810	size from above table	thread type	thread type	gear/top fitting	Other

EAC marking available upon request





^{*}Please send your selected details to Seetru and we can provide the full ordering code, price and lead-time.

Capacity Table - In accordance with TÜV, AIR at 0°C and 1013mbar. Normal m³/hour Type 86810: Flow rates at 10% above the set pressure



	1	Bore Size (D0)
Set Pressure		10
Bar g	Psi g	Nm³/Hour
7	101.5	363
8	116	409
9.3	134.85	468
10	145	500
10.5	152.25	524
11	159.5	547
11.5	166.75	570
14.5	210.25	707
16	232	776



for compressed air or gases

cryogenic & liquefied gas

refrigeration

Type 346 / 356

Safety valves with either Bronze or Stainless Steel body < Enclosed discharge valve with threaded connections <

Example Applications

- Air/Gas systems
- Pressure vessels
- Medical gases
- Technical Gases
- CO2 refrigeration
- Ammonia refrigeration (34610)
- Cryogenic applications
- Liquefied gases

Specifications

- Inlet connections: 3/8" to 3/4"
- Temperature range:-196°C to +50°C
- Pressure range: 0.83 to 30.76 bar.g.

Materials of Construction

Component	Material	Grade
Inlet	Stainless Steel	1.4401 (316)
Body	356 Valve = Bronze	C83600
	346 Valve = Stainless Steel	1.4408 (316)
Internal Parts	356 Valve = Brass	BS2874 CZ121
	346 Valve = Stainless Steel	1.4401 (316)
Spring	Stainless Steel	1.4310 (302)



Approvals

- TÜV Type test approval 728
- Designed in accordance with BS EN ISO 4126-1
- PED 2014/68/EU
- Materials meet the requirements of BAM for oxygen service.





Seal Materials

Seal Material	Temperature Range
PTFE	-196°C to +50°C

Standard seal materials shown, others are available.

Top Fitting Options

- Standard Option Sealed Cap (gas tight cap)



- Other options: Sealed lever (gas tight)





Bore size	9.5	9.5mm (34610)			9.5mm (35610)		
Inlet Size	3/8" 1/2" 3/4"		3/8"	1/2"	3/4"		
Outlet Size		3/4" 3/4"					
Flow Area	70.9mm²			70.9mm²			
H - Height (Rota-lift cap version)	113mm				99mm		
TÜV alloted outflow coefficient	0.6 (0	0.6 (0.83 to 3.0 bar)		0.6 (0.83 to 3.0 bar)			
Weight (approximate) Kg	0.7 (3.	0.7 (3.0 to 30.76 bar)		0.7 (3.0 to 30.76 bar)		76 bar)	
Set Pressure range - PED (CE) Bar g	0.8						
Relieving pressure/fully open pressure	Set pressure +10%						
Reseating pressure	Set pressure -10%						

Maximum permissible built up back pressure = 10% of set pressure at or below which flow is not reduced. Stable operation on flows down to 50% of valve rated capacity.

Standard Thread Connection Types

- BSP Parallel male thread
- BSP Taper male thread
- NPT male thread

Standard Outlet Connection Types



NPT female thread

Valve Selection Guide


Body Material	Valve Type	Select Bore	Inlet Size	Inlet Thread Type	Outlet Thread Type	Easing Gear	Seal Material
Stainless Steel	346	0.5	Select inlet size	Select Inlet thread	Select Outlet	Cld	DTEE
Bronze	356	9.5mm	from above table	type	thread type	Sealed cap	PTFE

EAC marking available upon request

Example of Valve Selection Process

Example	Bronze	356	9.5	1/2"	NPT	NPT	Sealed Cap	PTFE	23.5 barg
Selection	Body Material	Valve Type	Bore = 9.5mm	Inlet Size	Inlet Thread Type	Outlet Thread Type	Top Fitting	Seal	Set Pressure







RETURN TO CONTENTS PAGE

Н

SeetruLimited

^{*}Please send your selected details to Seetru and we can provide the full ordering code, price and lead-time.

Capacity Table - In accordance with TÜV, AIR at 0°C and 1013mbar. Normal m³/hour Type 346/356: Flow rates at 10% above the set pressure



	<u> </u>	Bore Size (D0)
Set Pressure		9.5mm
Bar g	Psi g	Nm³/Hour
0.83	12.04	54.8
1.0	14.50	61.2
2.0	29.00	93.0
3.0	43.50	125.0
4.0	58.00	183.0
5.0	72.50	220.0
6.0	87.00	257.0
7.0	101.50	294.5
8.0	116.00	331.7
9.0	130.50	369.0
10.0	145.00	406.0
15.0	217.50	592.0
20.0	290.00	778.0
25.0	362.50	964.0
30.0	435.00	1149.6
30.76	446.02	1178.0



for compressed air or gases

steam

cryogenics & liquefied gases

Seetru Limited

Type 936 Threaded

Safety valves made with brass inlets< Enclosed discharge valve with threaded connections< Metal to metal sealing<

Example Applications

- Air / gas compressors
- Pressure vessels
- Medical gases/Technical gases
- Thermal relief
- Steam systems

Specifications

- Inlet connections: 1/2" to 2" threaded connections (depending on valve bore size) (for flanged connections see 946 Flanged datasheet).
- Temperature range:-196°C to +250°C (depending on body o'ring material)
- Pressure range: 0.3 to 28.0
 barg (depending on valve bore size)

Materials of Construction

Component	Material	Grade
Inlet	Brass	CZ132 / CW602N
Outlet Body (10mm bore valve)	Bronze	SB-62 C8360
Outlet Body (15, 20 & 25mm bore valves)	Stainless Steel	1.4408 (316)
Spring	Stainless Steel	1.4310 (302)
Disc	Stainless Steel	1.4401 (316)



Approvals

- TÜV Type test approval 1016
- Designed in accordance with BS EN SO 4126-1
- PED 2014/68/EU
- EAC
- Leak tightness at 90% set pressure to API 527 and in accordance with EN ISO 4126-1
- Materials meet the requirements of BAM (Germany) for oxygen service

Seal Materials

o'ring used for the sealed cap/lever.

O'ring material

Temperature Range

Viton® (FKM)

-20°C to +250°C

Nitrile (NBR)

-30°C to +150°C

Silicone

-50°C to +250°C

PTFE

-196°C to +250°C

EPDM

-40°C to +150°C

Standard seal materials shown, others are available.

Easing Gear / Lifting Gear / Top Fitting Options

• Sealed Cap (gas tight cap)



Sealed lever (gas tight)



Rota-lift (not gas tight)



Open Lever (not gas tight)







Bore size	10mm (93610)		1	15mm (93615)		20mm (93620)		20)	25mm (93625)				
Inlet Size	1/2"	3/4"	1"	1"	1 1/4"	1 1/2"	1"	1 1/4"	1 1/2"	1"	1 1/4"	1 1/2"	2"
Outlet Size		1"		1 1/2"		2"		2"					
Flow Area	78.5mm²		177mm²		314mm²			491mm²					
H - Height (Sealed Lever version)	114mm		168mm		141mm		225mm						
TÜV alloted outflow coefficient	0.83	(above 3.0	bar)	0.74 (above 3.0 bar)		bar)	0.8	(above 4.0	bar)	0	.8 (abov	e 4.0 ba	ir)
Weight (approximate) Kg		1.0		2.1		3.5			4.2				
Set Pressure range - PED (CE) Bar g		0.3 to 28.0		0.3 to 28.0		0.3 to 28.0)	0.3 to 20.0				
Relieving pressure/fully open pressure				Set pressure +10% (0.1 bar g below 1.0 bar g)									
Reseating pressure				Set pressure -10% (0.3 bar g below 3.0 bar g)									

- TÜV alloted outflow coefficients for pressures above 3.0/4.0 bar g, for lower pressures please see the flow rate tables or contact Seetru.
- Maximum permissible built up back pressure = 10% of set pressure at or below which flow is not reduced.
- Stable operation on flows down to 50% of valve rated capacity.
- Leak tightness at 90% set pressure to API 527 and in accordance with EN ISO 4126-1

Standard INLET Connection Types




- BSP parallel male thread
- BSP taper male thread
- NPT male thread
- BSP parallel female thread (limited option)

Standard OUTLET Connection Types

BSP parallel female thread

Valve Drawing

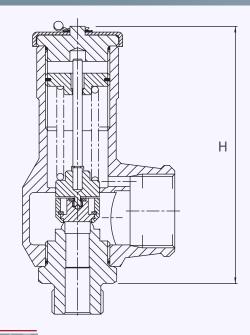


Valve Selection Guide

Valve type	Select Bore	Inlet Size	Inlet Thread Type	Top Fitting	O'ring material (for cap)	Set pressure
936	Select bore size from above table	Select inlet size from above table	Select Inlet Thread type	Select easing gear/top fitting	See table	Set pressure from available range

EAC marking available upon request

*Please send your selected details to Seetru and we can provide the full ordering code, price and lead-time.





Capacity Table - In accordance with TÜV, AIR at 0°C and 1013mbar. Normal m³/hour Type 936: Flow rates at 10% above the set pressure



Set Pressure		Bore Size (D0)						
		10mm	15mm	20mm	25mm			
Bar g	Psi g	Nm³/Hour	Nm³/Hour	Nm³/Hour	Nm³/Hour			
0.3	4.35	39	76	174	220			
0.5	7.25	56	104	238	304			
1	14.5	84	155	354	458			
2	29	135	270	554	838			
3	43.5	191	384	738	1154			
4	58	240	482	926	1448			
5	72.5	289	580	1115	1742			
6	87.00	338	678	1303	2036			
7	101.5	386	776	1491	2330			
8	116	425	874	1679	2625			
9	130.5	484	972////////	1868	2919			
10	145	533	1070	2056	3213			
15	217.5	777	1560	2998	4685			
20	290	1021	2049	3939	5848			
25	362.5	1266	2539	4881				
28	406	1412	2833	5446				

For any intermediate pressures/flows please contact Seetru

Capacity Table - In accordance with TÜV, STEAM. Kg/hour Type 936: Flow rates at 10% above the set pressure



6.1.0		Bore Size (D0)					
Set Pressure	Jet Plessure		15mm	20mm	25mm		
Bar g	Psi g	Kg/hour of Steam	Kg/hour of Steam	Kg/hour of Steam	Kg/hour of Steam		
0.3	4.35	32.5	63.3	145.3	182.3		
0.5	7.25	44.5	82.5	188.7	242.2		
1	14.5	66.1	121.7	278.4	361.9		
2	29	106.2	213.4	437.8	663.0		
3	43.5	149	299	576	901		
4	58	186	373	718	1122		
5	72.5	222	446	860	1343		
6	87.00	259	520	1000	1563		
7	101.5	295	592	1142	1784		
8	116	332	666	1283	2004		
9	130.5	368	738	1423	2224		
10	145	405	812	1563	2442		
15	217.5	585	1174	2261	3533		
20	290	765	1535	2957	4389		
25	362.5	947	1900	3655			
28	406	1055	2116	4078			



for compressed air or gases



Safety valves made with a Brass or Stainless Steel body and Stainless Steel inlets <

Type 33020 / 34020 / 34320

Enclosed discharge valve with threaded connections < Elastomer rubber sealing <

Example Applications



- Air / gas compressors
- Pressure vessels
- Pneumatic systems
- Medical gases/Technical gases
- Hydrogen (with 316 stainless steel inlet)



Specifications



- Inlet connections: 3/8" to 1/2" threaded inlet connections
- Temperature range:-40°C to +200°C (depending on body rubber seal material)
- Pressure range: 55.0 to 103.4 bar






- Designed in accordance with BS EN ISO 4126-1
- PED 2014/68/EU
- EAC



Materials of Construction

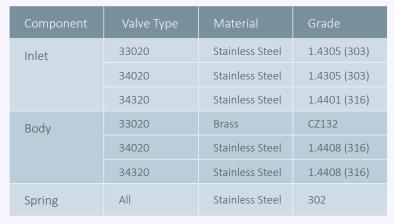

Drawing showing all component materials available upon request.

Seal Materials



This valve using metal to metal sealing. There is a choice of o'ring used for the sealed cap/lever.

Oʻring material – Top cap	Temperature Range
Viton® (FKM)	-15°C to +200°C
Nitrile (NBR)	-40°C to +120°C

Standard seal materials shown, others are available.

Top fitting



Sealed Cap (gas tight cap)



THESE VALVES SHOULD ONLY BE TESTED FOR SET PRESSURE ON LIQUID PRIOR TO FINAL INSTALLATION. VALVES THAT ARE TESTED ON AIR & FULLY LIFTED WILL CAUSE DAMAGE TO THIS SEALING FACE.



Bore size	7.14mm	7.14mm (33020) 7.14mm (34020)		7.14mm	(34320)	
Inlet Size	3/8"	1/2"	3/8"	1/2"	3/8"	1/2"
Outlet Size	1/	'2"	1/2"		1/2"	
Flow Area	40.04mm²		40.04mm²		40.04mm²	
H - Height	96mm		96mm		96mm	
TÜV alloted outflow coefficient	0.	67	0.67		0.67	
Weight (approximate) Kg	0	.8	0.8		0.8	
Set Pressure range - PED (CE) Bar g	55.0 to 103.4 Bar.		55.0 to 103.4 Bar.		55.0 to 103.4 Bar.	
Relieving pressure/fully open pressure			Set press	ure +10%		
Reseating pressure	Set pressure -15%					

Maximum permissible built up back pressure = 10% of set pressure at or below which flow is not reduced.

Standard INLET Connection Types


\(\sigma\)

- BSP parallel male thread
- BSP taper male thread
- NPT male thread

Standard OUTLET Connection Types

- BSP parallel female thread
- NPT female thread


Valve Drawing

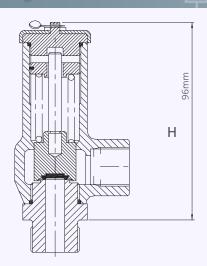

Valve Selection Guide

Valve type	Inlet Size	Inlet Thread Type	Outlet Thread Type	Seal Material	Set pressure
33020, 34020 or 34320 (see materials)	Select inlet size from above table	Select Inlet Thread type	Select Oulet Thread type	See table	Set pressure from available range

EAC marking available upon request





^{*}Please send your selected details to Seetru and we can provide the full ordering code, price and lead-time.

Capacity Table - In accordance with TÜV, AIR at 0°C and 1013mbar. Normal m³/hour Type 33020, 34020 & 34320: Flow rates at 10% above the set pressure



	<u> </u>	Bore Size (D0)		
Set Pressure		7.14mm		
Bar g	Psi g	Nm³/Hour		
55	797.5	1124.0		
60	870	1224.5		
65	942.5	1325.0		
70	1015	1425.5		
75	1087.5	1526.0		
80	1160	1626.5		
85	1,232.50	1727.0		
90	1305	1827.5		
95	1377.5	1928.0		
100	1450	2028.5		
103.4	1499.3	2096.9		



for compressed air or gases



Safety valves made with a Brass or Stainless Steel body and Stainless Steel inlets < Enclosed discharge valve with threaded connections <

Type 33110 / 34110 / 34410

Elastomer rubber sealing <

Example Applications



- Pressure vessels
- Pneumatic systems
- Medical gases/Technical gases
- Hydrogen (with 316 stainless steel inlet)



Specifications

- Inlet connections: 3/8" to 1/2" threaded inlet connections
- Temperature range:-40°C to +200°C (depending on body rubber seal material)
- Pressure range: 27 to 36 & 48.3 to 241.3 Bar



- TÜV Type test approval TNS-IS-19-162
- Designed in accordance with BS EN SO 4126-1
- PED 2014/68/EU
- EAC



Materials of Construction

Component	Valve Type	Material	Grade
Inlet	33110	Stainless Steel	303
	34110	Stainless Steel	303
	34410	Stainless Steel	316
Body	33110	Brass	CZ122
	34110	Stainless Steel	316
	34410	Stainless Steel	316
Spring	All	Stainless Steel	302

Drawing showing all component materials available upon request.

Seal Materials

This valve using metal to metal sealing. There is a choice of o'ring used for the sealed cap/lever.

O'ring material – Top cap	Temperature Range
Viton® (FKM)	-15°C to +200°C
Nitrile (NBR)	-40°C to +120°C

Standard seal materials shown, others are available.

Top fitting

Sealed Cap (gas tight cap)



THESE VALVES SHOULD ONLY BE TESTED FOR SET PRESSURE ON LIQUID PRIOR TO FINAL INSTALLATION. VALVES THAT ARE TESTED ON AIR & FULLY LIFTED WILL CAUSE DAMAGE TO THE SEALING FACE.



Bore size	3.66mm (33110)		3.66mm (34110)		3.66mm (34410)	
Inlet Size	3/8"	1/2"	3/8"	1/2"	3/8"	1/2"
Outlet Size	3/8"	1/2"	3/8"	1/2"	3/8"	1/2"
Flow Area	10.52mm²		10.52mm²		10.52mm²	
H - Height	92mm		92mm		92mm	
TÜV alloted outflow coefficient	0.73		0.73		0.73	
Weight (approximate) Kg	0.8		0.8		0.8	
Set Pressure range - PED (CE) Bar g	27 to 36 & 48.	3 to 241.3 Bar.	27 to 36 & 48.3 to 241.3 Bar.		27 to 36 & 48.3 to 241.3 Bar.	
Relieving pressure/fully open pressure	Set pressure +10%					
Reseating pressure	Set pressure -10%					

Maximum permissible built up back pressure = 10% of set pressure at or below which flow is not reduced.


Standard INLET Connection Types

- BSP parallel male thread
- BSP taper male thread
- NPT male thread

Standard OUTLET Connection Types

- BSP parallel female thread
- NPT female thread

Valve Drawing

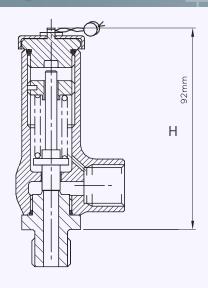

Valve Selection Guide

Valve type	Inlet Size	Inlet Thread Type	Outlet Thread Type	Seal Material	Set pressure
33110, 34110 or 34410 (see materials)	Select inlet size from above table	Select Inlet Thread type	Select Oulet Thread type	See table	Set pressure from available range

EAC marking available upon request

Example	33110	1/2"	BSP parallel	BSP parallel	Viton	100 bar
Selection	Valve Type	Inlet Size	Inlet Thread Type	Outlet Thread Type	Seal Material	Set Pressure



^{*}Please send your selected details to Seetru and we can provide the full ordering code, price and lead-time.

Capacity Table - In accordance with TÜV, AIR at 0°C and 1013mbar. Normal m³/hour Type 33110, 34110 and 34410: Flow rates at 10% above the set pressure



Set Pressure		Bore Size (D0)				
		3.66mm				
Bar g	Psi g	Nm³/Hour				
27	391.5	160.7				
30	435	177.9				
33	478.5	195.2				
36	522	212.5				
48	696	281.5				
50	725	293.0				
60	870.00	350.6				
70	1015	408.1				
80	1160	456.7				
90	1305	523.2				
100	1450	580.8				
150	2175	868.5				
200	2900	1156.2				
241	3494.5	1392.1				



Seetru Limited

for compressed air or gases

cryogenic & liquefied gas

refrigeration

Type 329

Safety valves with either Bronze or Stainless Steel body < Enclosed discharge valve with threaded connections <


Example Applications

- Air/Gas systems
- Natural Gas
- CNG/LNG
- Pressure vessels
- Medical gases
- Technical Gases
- CO2 refrigeration
- Ammonia refrigeration (Stainless steel)
- Cryogenic applications
- Liquefied gases

Specifications

- Inlet connections: 3/8" to 3/4"
- Temperature range:-196°C to +70°C
- Pressure range: 53.0 to 370.0 bar.g.

Materials of Construction

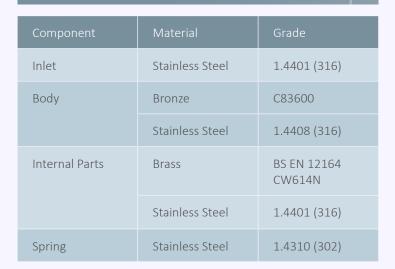



Approvals

- TÜV Type test approval, module B, Cert. No.TNS-15-19-177
- Designed in accordance with BS EN ISO 4126-1
- PED 2014/68/EU
- A.S.M.E. Boiler & Pressure Vessel code section VIII for air/gas
- FAC
- CRN



Seal Materials

Seal Material	Temperature Range
PTFE (up to 202 bar g) PPS (202 to 370 bar g)	-196°C to +70°C

Standard seal materials shown, others are available.

Top Fitting Options


- Standard Option Sealed Cap (gas tight cap)





	А	

Valve drawing

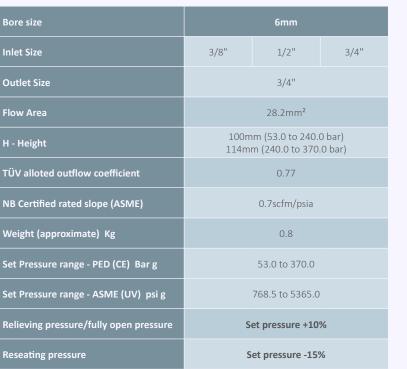



Standard Thread Connection Types



- BSP Parallel male thread
- BSP Taper male thread
- NPT male thread

Standard Outlet Connection Types



- BSP Parallel female thread
- NPT female thread

Valve Selection Guide



Valve Type	Body Material	Approval Required	Select Bore		Inlet Thread Type	Outlet Thread Type	Easing Gear	Seal Material
	Stainless Steel	PED (CE)		Select inlet size	Calastialat	C-1+ O+1-+		
329	Bronze	PED (CE), ASME (UV, NB), CRN	6mm	from above table	Select Inlet thread type	Select Outlet thread type	Sealed cap	PTFE

EAC marking available upon request

Please send your selected details to Seetru and we can provide the full ordering code, price and lead-time

Example of Valve Selection Process





Η

Capacity Table - In accordance with TÜV, AIR at 0°C and 1013mbar. Normal m³/hour Type 329: Flow rates at 10% above the set pressure



6.12		Bore Size (D0)				
Set Pressure		6mm				
Bar g	Psi g	Nm³/Hour				
53	768.5	879.6				
60	870.0	993.8				
70	1015.0	1156.9				
80	1160.0	1320.0				
90	1305.0	1483.1				
100	1450.0	1646.3				
150	2175.0	2461.9				
200	2900.0	3277.5				
250	3625.0	4093.1				
300	4350.0	4908.7				
350	5075.0	5724.4				
370	5365.0	6050.6				

For any intermediate pressures/flows please contact Seetru

Capacity Table - In accordance ASME section VIII Div I, AIR at 60°F and 14.7 psia/scfm. SCFM Type 329: Flow rates at 10% above the set pressure

Set Pressure		Bore Size (D0)				
		6mm				
Psi g	Bar g	SCFM				
768.5	53	602				
870	60	680				
913.5	63	714				
1203.5	83	937				
1305	90	1015				
1450	100	1127				
2175	150	1685				
2900	200	2243				
2929	202	2266				
3480	240	2690				
3625	250	2802				
4350	300	3360				
5075	350	3918				
5365	370	4141				



Seetru Limited

for compressed air or gases

Type 359

Safety valves made from Stainless Steel < Enclosed discharge valve with threaded connections <

Example Applications

- Air/Gas compressors
- Natural Gas
- Pressure vessels
- Medical gases
- **Technical Gases**
- Hydrogen production/generation

Specifications

- Inlet connections: 3/8" and 1/2"
- Temperature range:
 - 0°C to 200°C (with 1.4057 (431) stainless steel inlet)
 - -50°C to 150°C (with 1.4401 (316) stainless steel inlet)
- Pressure range: 35.0 to 500.0 bar.g.



Approvals

- TÜV Type test approval, module B, Cert. No.TNS-15-19-175
- Designed in accordance with BS EN ISO 4126-1
- PED 2014/68/EU
- A.S.M.E. Boiler & Pressure Vessel code section VIII for air/gas
- EAC
- CRN









Materials of Construction

Component	Material	Grade
Inlet	Stainless Steel	1.4057 (431)
		1.4401 (316)
Body	Stainless Steel	1.4408 (316)
Internal Parts	Stainless Steel	1.4305 (303)
Spring	Stainless Steel	1.4310 (302)

Inlet Seat Material

This valve seals using a metal ball design				
Temperature Range				
0°C to +200°C				
-50C to +150°C				

Standard seal materials shown, others are available.

Top Fitting Options

- Standard Option Sealed Cap (gas tight cap)





Bore size	4.6	mm	
Inlet Size	3/8"	1/2"	
Outlet Size	1/2"		
Flow Area	16.6	mm²	
H - Height	96mm		
TÜV alloted outflow coefficient	0.402		
NB Certified rated slope (ASME)	0.34 scfm/psia		
Weight (approximate) Kg	0.8		
Set Pressure range - PED (CE) Bar g	35.0 to	500.0	
Set Pressure range - ASME (UV) psi g	507.5 to 7250.0		
Relieving pressure/fully open pressure	Set pressure +10%		
Reseating pressure	Set press	sure -10%	

Maximum permissible built up back pressure = 10% of set pressure at or below which flow is not reduced


Standard Thread Connection Types

- BSP Parallel male thread
- BSP Taper male thread
- NPT male thread

Standard Outlet Connection Types

- BSP Parallel female thread
- NPT female thread

Valve drawing

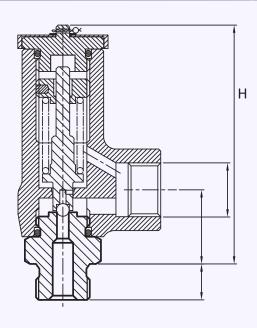


IMPORTANT NOTE:

These valves should only be tested for set pressure on liquid prior to final installation. Valves that are tested on air & fully lifted will cause damage to the sealing face.

Valve Selection Guide

Valve Type	Inlet Material	Approval Required	Select Bore	Inlet Size	Inlet Thread Type	Outlet Thread Type	Easing Gear	Seal Material
250	Stainless Steel 1.4057 (431)	PED (CE)	A CC	Select inlet size		Select Outlet	Cooled oor	
359	Stainless Steel 1.4401 (316)	PED (CE), ASME (UV, NB), CRN	4.66mm	from above table	thread type	thread type	Sealed cap	Metal ball seal

EAC marking available upon request





^{*}Please send your selected details to Seetru and we can provide the full ordering code, price and lead-time.

Capacity Table - In accordance with TÜV, AIR at 0°C and 1013mbar. Normal m³/hour Flow rates at 10% above the set pressure



Cat Danasana	Set Pressure		Bore Size (D0)				
Set Pressure							
Bar g	Psi g	Nm³/Hour					
35	507.5	179.8					
50	725.0	254.9					
100	1450.0	505.2					
150	2175.0	755.5					
200	2900.0	1005.8					
250	3625.0	1256.0					
300	4350.0	1506.3					
350	5075.0	1756.6					
400	5800.0	2006.9					
450	6525.0	2257.2					
500	7250.0	2507.5					

For any intermediate pressures/flows please contact Seetru

Capacity Table - In accordance ASME section VIII Div I, AIR at 60°F and 14.7 psia/scfm. SCFM Flow rates at 10% above the set pressure

Set Pressure		Bore Size (D0)				
		4.6mm				
Bar g	Psi g	SCFM				
507.5	35	195				
725	50	276				
1450	100	547				
2175	150	818				
2900	200	1090				
3625	250	1361				
4350	300	1632				
5075	350	1903				
5800	400	2174				
6525	450	2445				
7250	500	2716				



for compressed air or gases

steam

hygienic

Type 6G6 / 6G1

Clean Service/Hygienic Safety valves with Stainless Steel body < Enclosed discharge valve with Tri-Clamp inlet connections <

Safety valve for food industry & other hygienic applications including clean steam & gas applications


Example Applications

- Compressed air or gas
- Food production plants
- Hygienic applications
- Pressure vessels
- Medical gases
- Technical gases
- Steam systems

Specifications

- Inlet connections: 1/2" to 1" Tr-Clamp (depending on bore size)
- Temperature:-15°C to +200°C (depending on seal material)
- Pressure range: 0.32 to 55.2 barg (depending on bore size)
 - Maximum 12 barg for Steam Applications.

Materials of Construction

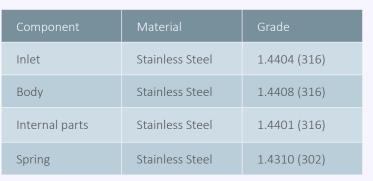

SURFACE FINISH

Process Contact Surface

In accordance with ASME BPE-2005 Table SF-5. Surface designation Ra Max 15 μinches, 0.4 μm, Electropolished.

Other Surfaces

Not greater than 60 $\mu inches$, 1.5 μm

Approvals

- TÜV Type test approval 728 (10mm nominal bore)
 - TÜV Type test approval 761 (13mm nominal bore)
- Designed in accordance with BS EN SO 4126-1.
- PED 2014/68/EU
- A.S.M.E. Boiler & Pressure Vessel code section VIII for air/gas
- CRN
- EAC



Seetru Limited

Seal Materials

Seal Material	Temperature Range
Perfluoroelastomer (FFKM)	-15°C to +200°C

Standard seal materials shown, others are available. Elastomer soft sealing specifically developed for food & pharmaceutical industries.

Compliant to:

- 1. FDA 21 CFR 177.2600
- 2. United States Pharmacopoeia (USP) Class VI
- ${\it 3. SP3A Sanitary Standards for Multiple Use Rubber Dairy Equipment No 18-03.}\\$

Easing Gear / Lifting Gear Options





Sealed Cap (gas tight cap)

Other Options:



Sealed lever (gas tight)

RETURN TO CONTENTS PAGE





_		

Bore size	9.5mm (6G610/6G110)		13.7mm (66	6613/6G113)
Inlet Size	1/2"	1/2" 3/4"		1"
Outlet Size	3/	/4"	1	
Flow Area	70.9	mm²	147.7mm²	
H - Height (Sealed cap version)	160	lmm	180mm	
TÜV alloted outflow coefficient	0.	78	0.71	
NB Certified rated slope (ASME)	1.71 sc	fm/psia	3.47 scfm/psia	
Weight (approximate) Kg	0	.9	1.3	
Set Pressure range - PED (CE) Bar g	0.48 to 55.2 (max 12 bar for Steam)		0.32 to 49.0 (max 12 bar for Steam)	
Set Pressure range - ASME (UV) psi g	22.5 to 800.4		20.3 to	710.5
Relieving pressure/fully open pressure	Set pressure +10% (0.1 Bar below 1.0 Bar)		Set pressure + 10% (0.3 Bar below 1.4 Bar)	
Reseating pressure		Set pressure -10% (0.3 Bar.g minimum)	


Standard Thread Connection Types

 Tri-Clamp® compatable generally in accordance with ASME BPE 2005 & BS 4825-3.

Standard Outlet Connection Types

• BSP Female Pipe threads (G)

Valve drawing

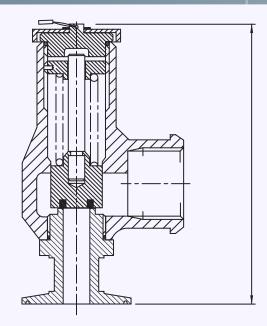

Valve Selection Guide

Approval Required	Valve type	Select Bore	Inlet Size	Easing Gear	Seal Material
PED (CE)	6G6	Select bore size	Select inlet size	Select easing	Perfluroelastomer (FFKM)
PED (CE), ASME (UV) & CR	6G1	Select bore size from above table	from above table	gear/top fitting	Other

EAC marking available upon request

Example	PED, ASME & CRN	6G1	9.5mm	1/2"	Sealed Cap	Perfluroelastomer (FFKM)	3.5 barg
Selection	Approval	Valve Type	Bore Size	Inlet Size	Easing Gear	Seal	Set Pressure



^{*}Please send your selected details to Seetru and we can provide the full ordering code, price and lead-time.

Capacity Table - In accordance with TÜV, AIR at 0°C and 1013mbar. Normal m^3 /hour

Type 6G6: Flow rates at 10% above the set pressure

Sot Drossuro		Bore Size (D0)			
Set Pressu	re Mil	9.5mm (6G610)	13.7mm (6G613)		
Bar g	Psi g	Nm³/Hour	Nm³/Hour		
0.32	4.64		114.2		
0.48	6.96	48.9	124.5		
1	14.5	76.9	164.9		
2	29	121.0	229.1		
3	43.5	162.4	307.5		
4	58	203.8	385.9		
5	72.5	245.3	464.3		
5.65	81.93	272.2	515.3		
6	87	286.7	542.7		
7	101.5	328.1	621.2		
8	116	369.5	699.6		
9	130.5	410.9	778.0		
10	145	452.4	856.4		
15	217.5	659.5	1248.5		
20	290	866.6	1640.6		
25	362.5	1073.8	2032.7		
30	435	1280.9	2424.8		
35	507.5	1488.1	2816.9		
40	580	1695.2	3209.0		
45	652.5	1902.3	3601.1		
49	710.5	2068.0	3914.8		
50	725	2109.4			
55.2	800.4	2324.8			

For any intermediate pressures/flows please contact Seetru

Capacity Table - In accordance ASME section VIII Div I, AIR at 60°F and 14.7 psia/scfm. SCFM

Type 6G1: Flow rates at 10% above the set pressure

Cat Draggura		Bore Size (D0)			
Set Pressu	re Mil	9.5mm (6G610)	13.7mm (6G613)		
Psi g	Bar g	SCFM	SCFM		
20.3	1.40		131.9		
22.5	2.50	68.7	139.4		
30	2.07	81.5	165.5		
34.8	2.80	90.6	183.8		
40	2.76	100.4	203.7		
43.5	3.00	106.9	217.0		
50	3.45	119.2	241.8		
82	5.66	179.3	363.9		
100	6.90	213.2	432.6		
150	10.34	307.2	623.4		
200	13.79	401.2	814.2		
250	17.24	495.3	1005.0		
300	20.69	589.3	1195.8		
350	24.14	683.3	1386.6		
400	27.59	777.4	1577.4		
435	30.00	843.2	1711.0		
450	31.03	871.4	1768.2		
500	34.48	965.4	1959.0		
507.5	35.00	979.5	1987.6		
550	37.93	1059.4	2149.8		
600	41.38	1153.4	2340.6		
650	44.83	1247.5	2531.4		
700	48.28	1341.5	2722.2		
710.5	49.00	1361.3	2762.3		
750	51.72	1435.5			
800.4	55.20	1530.3			

for compressed air or gases

steam

refrigeration

Type 946 Flanged

Safety valves made from Stainless Steel < Enclosed discharge valve with flanged connections < Metal to metal sealing <

Seetru Limited

Example Applications

- Air / gas compressors
- Pressure vessels
- Medical gases/Technical gases
- Refrigeration (including ammonia)
- Thermal relief
- Steam systems
- Hydrogen

Specifications

- Inlet connections: DN20 (3/4") or DN25 (1") flange
- DIN EN1092 and ANSI flanges are available
 Temperature range:-50°C to +250°C
- Temperature range:-50°C to +250°C
 (depending on body o'ring material)
- Pressure range: 0.3 to 28.0 barg

Materials of Construction

Component	Material	Grade
Inlet & Outlet Flanges	Stainless Steel	1.4401 (316)
Body	Stainless Steel	1.4408 (316)
Internal Parts	Stainless Steel	1.4401 (316)
Spring	Stainless Steel	1.4310 (302)
Disc	Stainless Steel	AISI 440B



Approvals

- TÜV Type test approval 1016
- Designed in accordance with BS EN SO 4126-1
- PED 2014/68/EU
- EAC
- Leak tightness at 90% set pressure to API 527 and in accordance with EN ISO 4126-1

Seal Materials

o'ring used for the sealed cap/lever.

O'ring material – Top cap

Temperature Range

Viton® (FKM)

-20°C to +250°C

Nitrile (NBR)

-30°C to +150°C

 Silicone
 -50°C to +250°C

 EPDM
 -40°C to +150°C


Standard seal materials shown, others are available.

Easing Gear / Lifting Gear / Top Fitting Options

Sealed Cap (gas tight cap)



Sealed lever (gas tight)







Bore size	10mm ((94610)	15mm (94615)
Inlet Size	DN20 DN25 (3/4") (1")		DN25 (1")
Outlet Size	DN25	5 (1")	DN40 (1 1/2")
Flow Area	78.5mm²		177mm²
H - Height (Sealed Lever version)	200mm		253mm
TÜV alloted outflow coefficient	0.83 (above 3.0 bar)		0.74 (above 3.0 bar)
Weight (approximate) Kg	3.0		5.3
Set Pressure range - PED (CE) Bar g	0.3 to 28.0		0.3 to 28.0
Relieving pressure/fully open pressure	Set pressure +10% (0.1 bar g below 1.0 bar g)		
Reseating pressure	Set pressure -10% (0.3 bar g below 3.0 bar g)		

- TÜV alloted outflow coefficients for pressures above 3.0 bar g, for lower pressures please see the flow rate tables or contact Seetru.
- Maximum permissible built up back pressure = 10% of set pressure at or below which flow is not reduced.
- Stable operation on flows down to 50% of valve rated capacity.
- Leak tightness at 90% set pressure to API 527 and in accordance with EN ISO 4126-1.


Standard INLET Connection Types

- DIN EN1092 Flange PN16, PN25 or PN40
- ASME Flange CL150, CL300 or CL600


Standard OUTLET Connection Types

- DIN EN1092 Flange PN16, PN25 or PN40
- ASME Flange CL150 or CL300

Valve Drawing

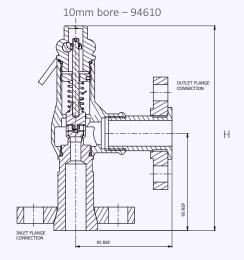

15mm bore - 94615

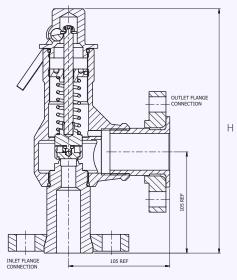

Valve Selection Guide

Valve type	Select Bore	Inlet Size	Inlet Flange Type	Outlet Flange Type	Easing Gear	O'ring material (for cap)
946	Select bore size from above table	Select inlet size from above table	Select Inlet Flange type	Select Outlet Flange type	Select easing gear/top fitting	See table

EAC marking available upon request





^{*}Please send your selected details to Seetru and we can provide the full ordering code, price and lead-time.

Capacity Table - In accordance with TÜV, AIR at 0°C and 1013mbar. Normal m³/hour Type 946: Flow rates at 10% above the set pressure



Set Pressure		Bore Size (D0)		
		10mm	15mm	
Bar g	Psi g	Nm³/Hour	Nm³/Hour	
0.3	4.35	39	76	
0.5	7.25	56	104	
1	14.5	84	155	
2	29	135	270	
3	43.5	191	384	
4	58	240	482	
5	72.5	289	580	
6	87.00	338	678	
7	101.5	386	776	
8	116	425	874	
9	130.5	484	972	
10	145	533	1070	
15	217.5	777	1560	
20	290	1021	2049	
25	362.5	1266	2539	
28	406	1412	2833	

For any intermediate pressures/flows please contact Seetru

Capacity Table - In accordance with TÜV, STEAM. Kg/hour Type 946: Flow rates at 10% above the set pressure



		Bore Size (D0)		Bore Size (D0)			
Set Pressure	Set Pressure		15mm				
Bar g	Psi g	Kg/hour of Steam	Kg/hour of Steam				
0.3	4.35	32.5	63.3				
0.5	7.25	44.5	82.5				
1	14.5	66.1	121.7				
2	29	106.2	213.4				
3	43.5	149	299				
4	58	186	373				
5	72.5	222	446				
6	87.00	259	520				
7	101.5	295	592				
8	116	332	666				
9	130.5	368	738				
10	145	405	812				
15	217.5	585	1174				
20	290	765	1535				
25	362.5	947	1900				
28	406	1055	2116				



for compressed air or gases

Type 64613 / 64113 Flanged

Safety valves with Stainless Steel body < Enclosed discharge valve with flanged connections <

Example Applications

- Air / gas compressors
- Pressure vessels
- Pneumatic systems
- Medical gases
- Technical gases

Specifications

- Inlet connections: DN20 (3/4") or DN25 (1") DIN or ANSI flanges
- Temperature:-40°C to +200°C (depending on seal material)
- Pressure range: 0.32 to 49.0 barg




Approvals

- TÜV Type test approval 761 (13mm nominal bore)
- Designed in accordance with BS EN SO 4126-1.
- PED 2014/68/EU
- A.S.M.E. Boiler & Pressure Vessel code section VIII for air/gas
- CRN
- EAC



Materials of Construction

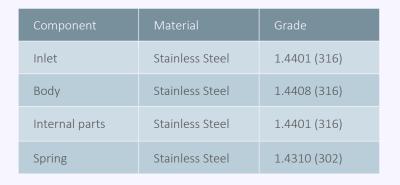


Seal Materials

Seal Material	Temperature Range
Viton® (FKM)	-15°C to +200°C
Nitrile (NBR)	-40°C to +120°C

Easing Gear / Lifting Gear Options











Valve Drawing



Bore size	13.7mm		
Inlet Size	DN20 (3/4")	DN25 (1")	
Outlet Size	DN25	5 (1")	
Flow Area	147.4mm²		
H - Height (Sealed cap version)	197mm (up to 35 bar) 226mm (35-49 bar)		
TÜV alloted outflow coefficient	0.71		
NB Certified rated slope (ASME)	3.47 scfm/psia		
Weight (approximate) Kg	3.2		
Set Pressure range - PED (CE) Bar g	0.32 to 49.0		
Set Pressure range - ASME (UV) psi g	20.3 to 710.5		
Relieving pressure/fully open pressure	Set pressure +10% (0.3 Bar.g below 1.4 Bar.g		
Reseating pressure	Set pressure-10% (0	0.3 Bar.g. minimum)	

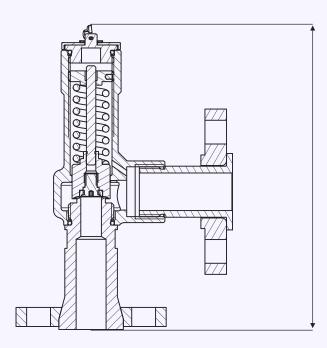

Standard Thread Connection Types



- DIN EN1092 Flange PN16, PN25 or PN40
- ASME Flange CL150, CL300 or CL600

Standard Outlet Connection Types



- DIN EN1092 Flange PN16, PN25 or PN40
- ASME Flange CL150, CL300 or CL600

Valve Selection Guide



Approval Required	Valve type	Inlet Size	Inlet Flange Type	Outlet Flange Type	Easing Gear	Seal Material
PED (CE)	64613	Select inlet size from above table	Select Inlet	Select Outlet		Viton® (FKM)
PED (CE), ASME				flange type	flange type	Select easing gear/top fitting
(UV) & CRN	64113					Other

EAC marking available upon request



Example	PED, ASME & CRN	64113	DN20	DIN EN1092 Flange PN16	DIN EN1092 Flange PN16	Sealed Cap	Viton	3.5 bar
Selection	Approval	Valve Type	Inlet Size	Inlet Flange Type	Outlet Flange Type	Easing Gear	Seal	Set Pressure



^{*}Please send your selected details to Seetru and we can provide the full ordering code, price and lead-time.

Capacity Table - In accordance with TÜV, AIR at 0°C and 1013mbar. Normal m³/hour

Type 64613: Flow rates at 10% above the set pressure

Cat Duage	🛪	Bore Size (D0)
Set Pressu	re Mil	13.7mm
Bar g	Psi g	Nm³/Hour
0.32	4.64	114.2
0.48	6.96	124.5
1	14.5	164.9
2	29	229.1
3	43.5	307.5
4	58	385.9
5	72.5	464.3
5.65	81.93	515.3
6	87	542.7
7	101.5	621.2
8	116	699.6
9	130.5	778.0
10	145	856.4
15	217.5	1248.5
20	290	1640.6
25	362.5	2032.7
30	435	2424.8
35	507.5	2816.9
40	580	3209.0
45	652.5	3601.1
49	710.5	3914.8

Capacity Table - In accordance ASME section VIII Div I, AIR at 60°F and 14.7 psia/scfm. SCFM

Type 64113: Flow rates at 10% above the set pressure

Cat Danas	🛪	Bore Size (D0)
Set Pressu	re Mil	13.7mm
Psi g	Bar g	SCFM
20.3	1.40	131.9
22.5	2.50	139.4
30	2.07	165.5
34.8	2.80	183.8
40	2.76	203.7
43.5	3.00	217.0
50	3.45	241.8
82	5.66	363.9
100	6.90	432.6
150	10.34	623.4
200	13.79	814.2
250	17.24	1005.0
300	20.69	1195.8
350	24.14	1386.6
400	27.59	1577.4
435	30.00	1711.0
450	31.03	1768.2
500	34.48	1959.0
507.5	35.00	1987.6
550	37.93	2149.8
600	41.38	2340.6
650	44.83	2531.4
700	48.28	2722.2
710.5	49.00	2762.3

for compressed air or gases

refrigeration

Type 636 / 631

Safety valves with bronze body < Enclosed discharge valve with threaded connections <

Seetru Limited

Example Applications

- Compressor manufacture
- Industrial refrigeration
- Commercial refrigeration
- Ice making machinery
- Air conditioning

Specifications

- Inlet connections: 3/8" to 1 1/2" (depending on bore size)
- Temperature:-30°C to +200°C
- Pressure range: 6.6 to 55.2 barg (depending on bore size)

Materials of Construction

Component	Material	Grade
Inlet	Brass	CW614N
Body	Bronze	CC491K SB-62 C83600
Internal Parts	Brass	CW614N
Spring	Stainless Steel	1.4310 (302)



Approvals

- TÜV Type test approval 728 (10mm nominal bore)
 - TÜV Type test approval 761 (13mm nominal bore)
- TÜV Type test approval 916 (18mm nominal bore)
- Designed in accordance with BS EN SO 4126-1.
- PED 2014/68/EU
- A.S.M.E. Boiler & Pressure Vessel code section VIII for air/gas
- CRN
- EAC



Seal Materials

Seal Material	Temperature Range
Perfluroelastomer (FFKM)	-30°C to +200°C


Standard seal materials shown, others are available.

Valve cap / Top Fitting

Standard option – Sealed Cap (gas tight cap)



• Other option – Sealed lever (gas tight)





RETURN TO CONTENTS PAGE

	-

Bore size		9.5			13.7mm		17mm			
Inlet Size	3/8"	1/2"	3/4"	1/2"	3/4"	1"	1"	1 1/4"	1 1/2"	
Outlet Size		3/4"			1"		1 1/2"			
Flow Area		70.9mm²		147.7mm²				227mm²		
H - Height (Rota-lift cap version)		99mm (up to 33 bar) 113mm (33-55.2 bar)			135mm (up to 33 bar) 168mm (33-49 bar)			204mm		
TÜV alloted outflow coefficient	0.78			0.71			0.84			
NB Certified rated slope (ASME)	1	74 scfm/ps	ia	3.47 scfm/psia			5.60 scfm/psia			
Weight (approximate) Kg		0.8		1.1			3.6			
Set Pressure range - PED (CE) Bar g		7.0 to 55.2			7.0 to 49.0		6.6 to 35.0			
Set Pressure range - ASME (UV) psi g	1	.01.5 to 800	.4	1	.01.5 to 710.	5	95.7 to 507.5			
Relieving pressure/fully open pressure				Set pressure +10%						
Reseating pressure				Set	t pressure -1	.0%				

Maximum permissible built up back pressure = 10% of set pressure at or below which flow is not reduced. Stable operation on flows down to 50% of valve rated capacity.

Standard INLET Thread Connection Types




- BSP Parallel male thread
- BSP Taper male thread
- NPT male thread

Standard OUTLET Thread Connection Types

- BSP Parallel female thread
- NPT female thread

Valves with Rota-lift Easing Gear







Approval Required	Valve type	Select Bore	Inlet Size	Inlet Thread Type	Outlet Threa Type	Easing Gear	Seal Material
PED (CE)	636	C-1 h	Select inlet size	Select Inlet thread	Calaat Outlat	Cl C :- +	Dfl
PED (CE), ASME (UV) & CRN	631	Select bore size from above table	from above table	type	Select Outlet thread type	Sealed Cap is the standard option.	Perfluroelastomer (FFKM)

EAC marking available upon request



Example	CE/PED, ASME/UV & CRN	631	9.5	3/4"	NPT	NPT	Sealed Cap	FFKM	16.2 barg
Selection	Approval	Valve Type	Bore = 9.5mm	Inlet Size	Inlet Thread Type	Outlet Thread Type	Easing Gear	Seal	Set Pressure



^{*}Please send your selected details to Seetru and we can provide the full ordering code, price and lead-time.

Capacity Table - In accordance with **TÜV**, AIR at 0°C and 1013mbar. Normal m³/hour Type 636: Flow rates at 10% above the set pressure

Sat Brassu	Set Pressure				
Set Flessu			13.7mm	17mm	
Bar g	Psi g	Nm³/Hour	Nm³/Hour	Nm³/Hour	
7	101.5	328.1	621.2	1131.6	
8	116	369.5	699.6	1274.5	
9	130.5	410.9	778.0	1417.3	
10	145	452.4	856.4	1560.2	
15	217.5	659.5	1248.5	2274.5	
20	290	866.6	1640.6	2988.7	
25	362.5	1073.8	2032.7	3703.0	
30	435	1280.9	2424.8	4417.3	
35	507.5	1488.1	2816.9	5131.6	
40	580	1695.2	3209.0		
45	652.5	1902.3	3601.1		
49	710.5	2068.0	3914.8		
50	725	2109.4			
55.2	800.4	2324.8			

For any intermediate pressures/flows please contact Seetru

Capacity Table - In accordance **ASME** section VIII Div I, AIR at 60°F and 14.7 psia/scfm. SCFM Type 631: Flow rates at 10% above the set pressure

Set Pressure	<u> </u>	Bore Size (D0)			
Set Flessule		9.5mm	13.7mm	17mm	
Psi g	Bar g	SCFM	SCFM	SCFM	
100	6.90	213.2	432.6	698.1	
150	10.34	307.2	623.4	1006.1	
200	13.79	401.2	814.2	1314.0	
250	17.24	495.3	1005.0	1621.9	
300	20.69	589.3	1195.8	1929.8	
350	24.14	683.3	1386.6	2237.8	
400	27.59	777.4	1577.4	2545.7	
435	30.00	843.2	1711.0	2761.2	
450	31.03	871.4	1768.2	2853.6	
500	34.48	965.4	1959.0	3161.5	
507.5	35.00	979.5	1987.6	3207.7	
550	37.93	1059.4	2149.8		
600	41.38	1153.4	2340.6		
650	44.83	1247.5	2531.4		
700	48.28	1341.5	2722.2		
710.5	49.00	1361.3	2762.3		
750	51.72	1435.5			
800.4	55.20	1530.3			



for refrigeration

Seetru Limited

Type 646 / 641

Safety valves with stainless steel body < Enclosed discharge valve with threaded connections <

Example Applications

- Compressor manufacture
- Industrial refrigeration
- Commercial refrigeration
- Ice making machinery
- Air conditioning

Specifications

- Inlet connections: 3/8" to 1 1/2" (depending on bore size)
- Temperature:-30°C to +200°C
- Pressure range: 6.6 to 55.2 barg (depending on bore size)

Materials of Construction

Component	Material	Grade
Inlet	Stainless Steel	1.4401 (316)
Body	Stainless Steel	1.4408 (316)
Internal Parts	Stainless Steel	1.4401 (316)
Spring	Stainless Steel	1.4310 (302)



Approvals

- TÜV Type test approval 728 (10mm nominal bore)
- TÜV Type test approval 761 (13mm nominal bore)
- TÜV Type test approval 916 (18mm nominal bore)
- Designed in accordance with BS EN SO 4126-1.
- PED 2014/68/EU
- A.S.M.E. Boiler & Pressure Vessel code section VIII for air/gas
- CRN
- EAC



Seal Materials

Seal Material	Temperature Range
Perfluroelastomer (FFKM)	-30°C to +200°C


Standard seal materials shown, others are available.

Valve cap / Top Fitting

• **Standard option** – Sealed Cap (gas tight cap)



Other option – Sealed lever (gas tight)





_ K F	
Δ	

Bore size		9.5			13.7mm			17mm		
Inlet Size	3/8"	3/8" 1/2" 3/4"		1/2"	3/4"	1"	1"	1 1/4"	1 1/2"	
Outlet Size		3/4"			1"			1 1/2"		
Flow Area		70.9mm²		147.7mm²				227mm²		
H - Height (Sealed cap version)		99mm (up to 33 bar) 113mm (33-55.2 bar)			135mm (up to 33 bar) 168mm (33-49 bar)			204mm		
TÜV alloted outflow coefficient	0.78			0.71			0.84			
NB Certified rated slope (ASME)	1	.74 scfm/ps	ia	3.47 scfm/psia		5.60 scfm/psia				
Weight (approximate) Kg		0.8		1.1			3.6			
Set Pressure range - PED (CE) Bar g		7.0 to 55.2			7.0 to 49.0		6.6 to 35.0			
Set Pressure range - ASME (UV) psi g	1	01.5 to 800.	.4	1	.01.5 to 710	5	95.7 to 507.5			
Relieving pressure/fully open pressure				Set pressure +10%						
Reseating pressure				Set	t pressure -1	.0%				

Standard INLET Thread Connection Types




- BSP Parallel male thread
- BSP Taper male thread
- NPT male thread

Standard OUTLET Thread Connection Types

- BSP Parallel female thread
- NPT female thread


Valves with Rota-lift Easing Gear



Valve Selection Guide

Approval Required	Valve type	Select Bore	Inlet Size	Inlet Thread Type	Outlet Threa Type	Easing Gear	Seal Material
PED (CE)	646	Calaat bassasiaa	C-1+:- -+-:	C-1+ -+ +	Calaat Outlat	Cl C :- +	D
PED (CE), ASME (UV) & CRN	641	Select bore size from above table	Select inlet size from above table	Select Inlet thread type	Select Outlet thread type	Sealed Cap is the standard option.	Perfluroelastomer (FFKM)

EAC marking available upon request





^{*}Please send your selected details to Seetru and we can provide the full ordering code, price and lead-time.

Capacity Table - In accordance with **TÜV**, AIR at 0°C and 1013mbar. Normal m³/hour Type 646: Flow rates at 10% above the set pressure

Set Pressure		Bore Size (D0)					
Set Plessure		9.5mm	13.7mm	17mm			
Bar g	Psi g	Nm³/Hour	Nm³/Hour	Nm³/Hour			
7	101.5	328.1	621.2	1131.6			
8	116	369.5	699.6	1274.5			
9	130.5	410.9	778.0	1417.3			
10	145	452.4	856.4	1560.2			
15	217.5	659.5	1248.5	2274.5			
20	290	866.6	1640.6	2988.7			
25	362.5	1073.8	2032.7	3703.0			
30	435	1280.9	2424.8	4417.3			
35	507.5	1488.1	2816.9	5131.6			
40	580	1695.2	3209.0				
45	652.5	1902.3	3601.1				
49	710.5	2068.0	3914.8				
50	725	2109.4					
55.2	800.4	2324.8					

For any intermediate pressures/flows please contact Seetru

Capacity Table - In accordance **ASME** section VIII Div I, AIR at 60°F and 14.7 psia/scfm. SCFM Type 641: Flow rates at 10% above the set pressure

Set Pressure		Bore Size (D0)			
		9.5mm	13.7mm	17mm	
Psi g	Bar g	SCFM	SCFM	SCFM	
100	6.90	213.2	432.6	698.1	
150	10.34	307.2	623.4	1006.1	
200	13.79	401.2	814.2	1314.0	
250	17.24	495.3	1005.0	1621.9	
300	20.69	589.3	1195.8	1929.8	
350	24.14	683.3	1386.6	2237.8	
400	27.59	777.4	1577.4	2545.7	
435	30.00	843.2	1711.0	2761.2	
450	31.03	871.4	1768.2	2853.6	
500	34.48	965.4	1959.0	3161.5	
507.5	35.00	979.5	1987.6	3207.7	
550	37.93	1059.4	2149.8		
600	41.38	1153.4	2340.6		
650	44.83	1247.5	2531.4		
700	48.28	1341.5	2722.2		
710.5	49.00	1361.3	2762.3		
750	51.72	1435.5			
800.4	55.20	1530.3			



Valves from Stock: Same-Day-Despatch

Our products are recognised globally for their exceptional quality and reliability, and in recent years Seetru have worked hard to maximise the efficiency of our manufacturing processes, to ensure that we are able to meet demands for supply and distribution. We now hold a large variety of safety valves in stock, allowing customers to purchase certain quantities from our website, and see them despatched on the same day.

Seetru offer atmospheric discharge safety valves and pipped discharge safety valves in brass / bronze or stainless steel. The Seetru LGS® range of pressure relief valves (for liquid, steam, and gasses) are available in bronze construction, with open-lever and sealed-cap options. These valves can be fitted with PTFE or EPDM seals, with both types having the WRAS approval- for installation on public water supply systems.

Seetru also operate a standardised three-day-despatch delivery service, which covers the entire range of valves we manufacture.

0



This compact, lightweight and portable design is very robust and able to meet the demands of a busy maintenance workshop or mobile operation. The Seetru Quicktester™ can be used with plant generated air supplies or with mobile bottled gas. This test-bench can be supplied with a range of adaptors allowing connection between 1/4" to 1" BSP as standard, additional adaptors are available increasing the connection sizes up to 2" BSP. The Quicktester™ is also available with NPT connection adaptors upon request. It is suitable for use with a wide range of elastomer sealed valves

Liquid Level Gauges

There are many industrial applications that require the monitoring of the liquid level in tanks. While the function of a level gauge is relatively simple, there are a variety of options available. The suitability and robustness of construction materials play a role in determining which gauge is required, as do the operating temperature and pressure requirements. Seetru liquid level gauges are primarily of two types, sight gauges and magnetic float by-pass gauges. Many of the Seetru gauges are direct reading though most have optional electronic remote reading systems and computer interfaces. The range includes the Quickmount, Seemag and CPI gauges for industrial and chemical applications and the Seeflex and Seemag for marine applications.



Seetru Limited, Albion Dockside Works, Bristol, BS1 6UT, England.

Copyright[©] 2022 Seetru Limited